




## MAINTENANCE PLATE

installs on Verso350 AF PN, PMR PN  
and Intraslim PN system




### DESCRIPTION

- Serves as the inspection flap for access to the cistern equipment.
- Modern design
- Made of glass or Compact
- White decoration
- White decorated glass with effect of depth
- Manually scored mounting bolts to adapt their length to the dimension of the cladding allowing a quick and easy installation
- Cladding thickness of 20 to 100 mm.
- Pads on the back of the frame to ensure pressing against the cladding

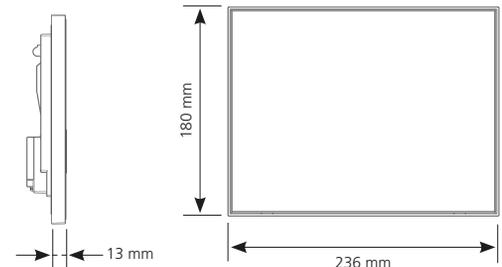

## CLOSING PLATE

installs on Verso350 AF PN, PMR PN  
and Intraslim PN system



### DESCRIPTION

- Allows the closing of the inspection trap of the cistern
- Fixing by screwing into the partition wall (adapt the mounting screws to the type and thickness of the partition wall)
- Serves as the inspection flap for access to the cistern equipment.
- Made of stainless steel
- Brushed finish
- Supplied with screws for minimum cladding thickness: 50 mm.  
If the cladding has a thickness < 50 mm: adapt the screws which must in all cases be of depth < than the thickness of the cladding.

