


Double flush telescopic with cable

Available in April 2013

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from 18 to 42mm., with or without rosette depending on diameter
- Button lid fixing bolt
- **Adjustable telescopic overflow every 7.5mm**
- Cable command allowing side or front offsetting
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.6l/s), made from ABS, heavy duty design
- NR/EPDM or silicone valve for a total tightness + protection
- Foam plug seal, shape and elasticity reinforced tightness
- Foam pan seal for compensating pan irregularity

Currently under certification

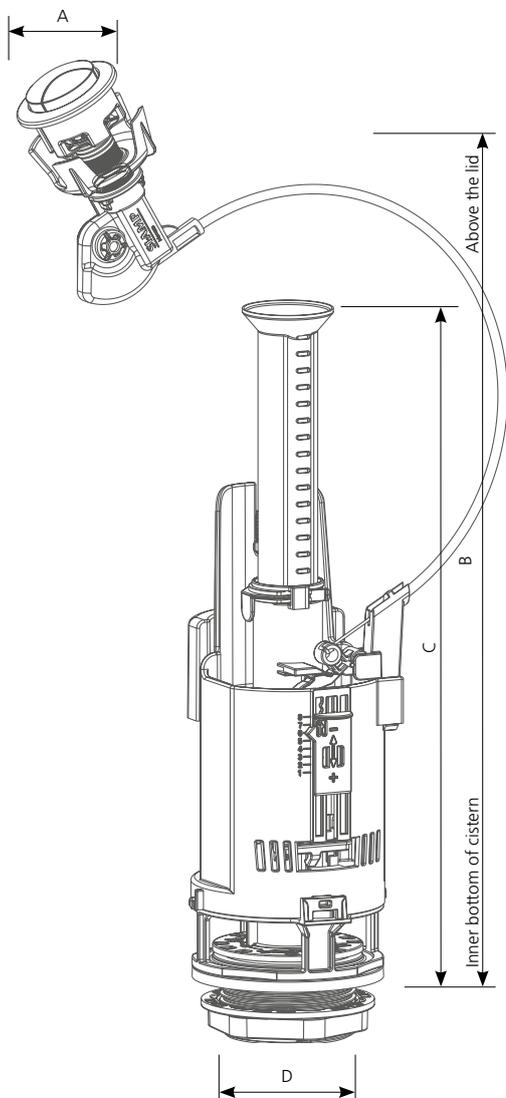

Compatible with:
 Lid hole (A), Ø from 18 to 42mm
 Drainage hole (D) Ø from 60 to 72mm
 Adjustable height (B)
 With rosette: from 310 to 460mm (lid hole (A) 18 to 38mm)
 Without rosette: from 288 to 438mm (lid hole (A) 39 to 42mm)
 Adjustable overflow height: from 188 to 330mm (C)



OUTLET VALVE

| | Packing | Packing | | Pallet Quantity | |
|----------|-------------|---------|----------------|-----------------|-----|
| | | Nb | M ³ | | Kg |
| BRIO 576 | Plastic bag | 10 | 0.060 | 5.66 | 240 |

