



STORM 33A



PUSHBUTTON MECHANISM

- Self-adjusting control button
- Universal adaptation
- Lid fixation
- Total watertightness
- Powerful rinsing flowrate
-  tested for 200,000 cycles
- Delivered complete
with bowl seal and cistern attaching screws
- Guaranteed 10 years
(except for rubber parts)

Sanitary expertise and consideration for water...

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04


E-mail: contact@siamp.com

Site Internet : <http://www.siamp.com>

TECHNICAL CHARACTERISTICS

SPARE PARTS

STORM 33A

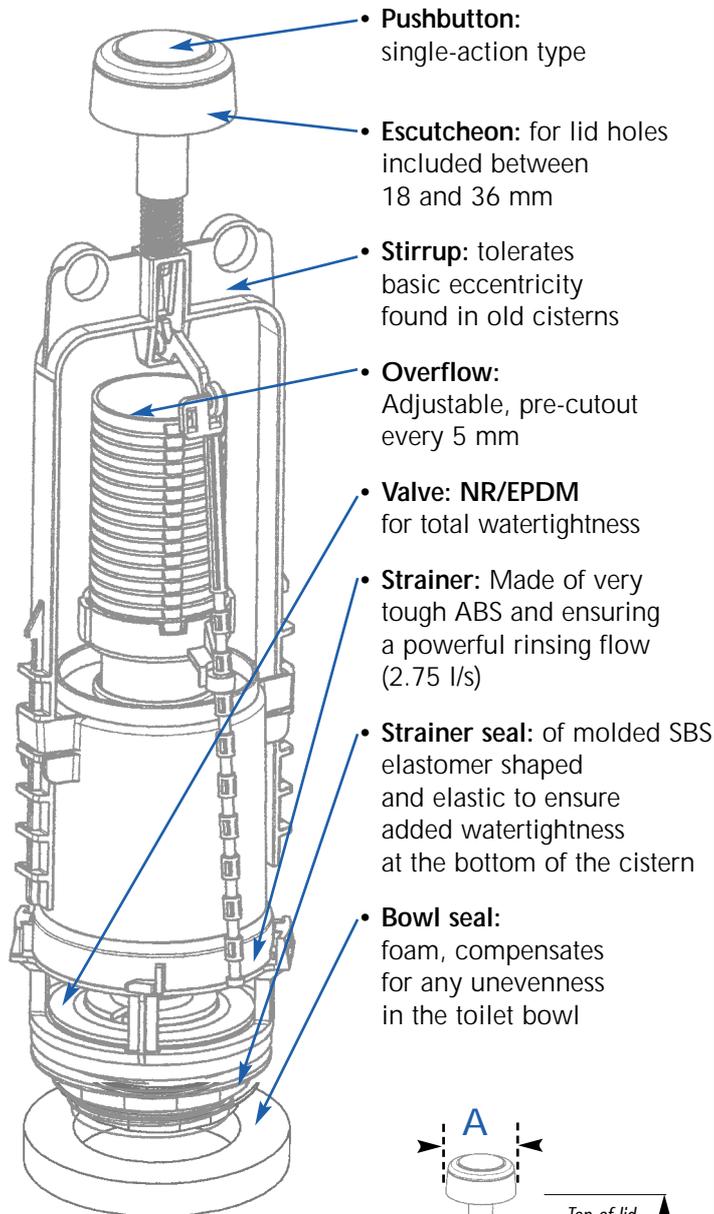

- Compatible with:



- Lid hole (A) dia. from 10 to 42 mm
- Drain hole (D) dia. from 58 to 72 mm

- Adjustable height (B):

- From 305 to 399 mm (lid hole dia. 18 to 36 mm)
- From 321 to 415 mm (lid hole dia. 37 to 42 mm)

- Adjustable overflow height

- From 180 to 240 mm (C)

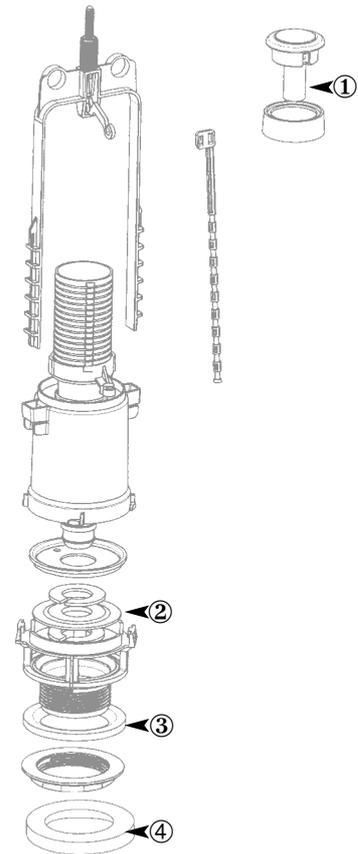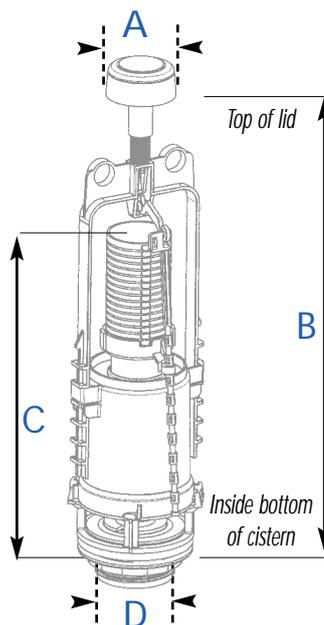

- ① Chrome-plated button assembly
- ② Valve dia. 72 mm
- ③ Strainer seal
- ④ Bowl seal


Range

STORM 33A

Mechanism only

STORM 33A/15EL

Mechanism with inlet valve
STANDARD 15EL



STORM 33A/95L

Mechanism with inlet valve
COMPACT 95L

