



SKIPPER 36A



Water economizer

30 m³/year

For a four person family

Self-adjusting control button

World patent

Universal adaptation

Lid fixation

Adjustable small flushing level

from 3 to 4.5 liters

Total watertightness

Powerful rinsing flowrate



tested for 200,000 cycles

Delivered complete

(with bowl seal and flush cistern attaching screw)

Guaranteed 10 years

(except for rubber parts)

Sanitary expertise and consideration for water...

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04


E-mail: contact@siamp.com

Site Internet : <http://www.siamp.com>

TECHNICAL CHARACTERISTICS

SPARE PARTS

SKIPPER 36A

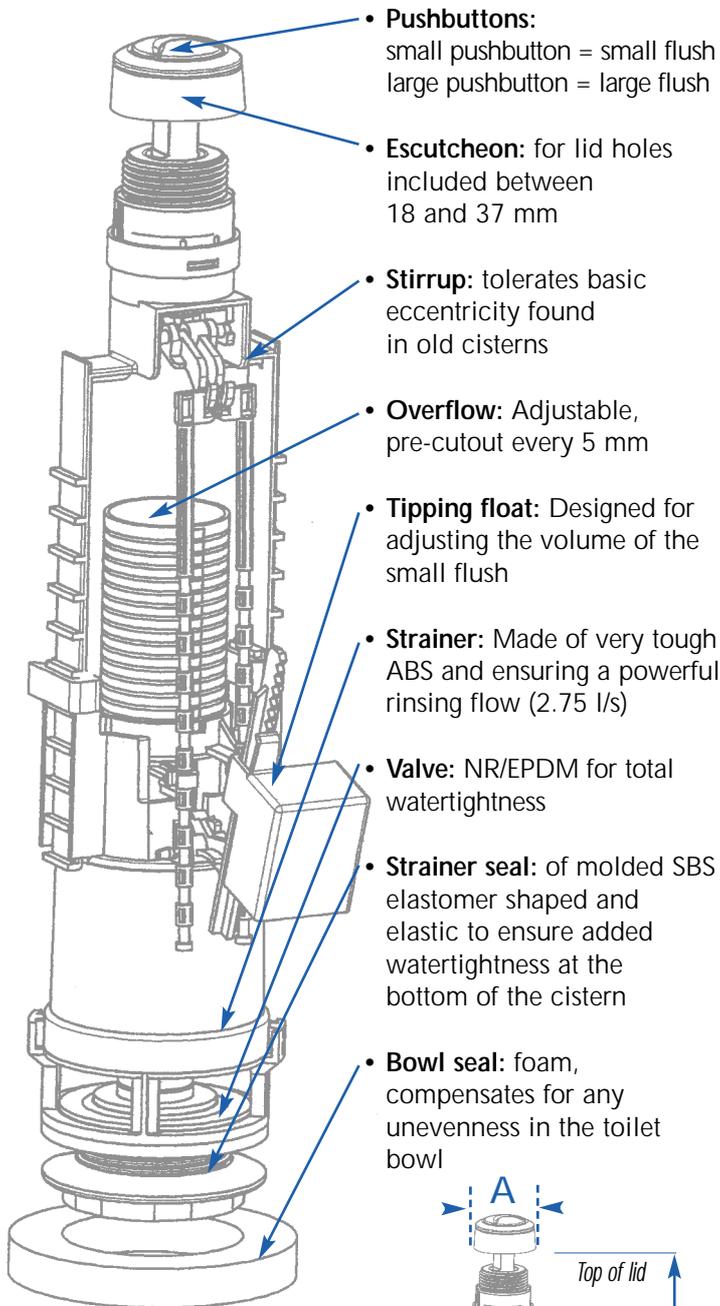

- Compatible with:



- Lid hole (A) dia. from 18 to 44 mm
- Drain hole (D) dia. from 58 to 72 mm

- Adjustable height (B)

- From 293 to 447 mm (lid hole dia. 18 to 37 mm)
- From 312 to 415 mm (lid hole dia. 38 to 44 mm)

- Adjustable overflow height

- From 180 to 240 mm (C)

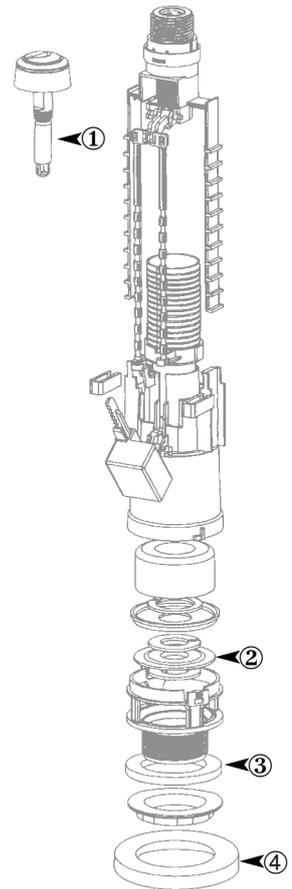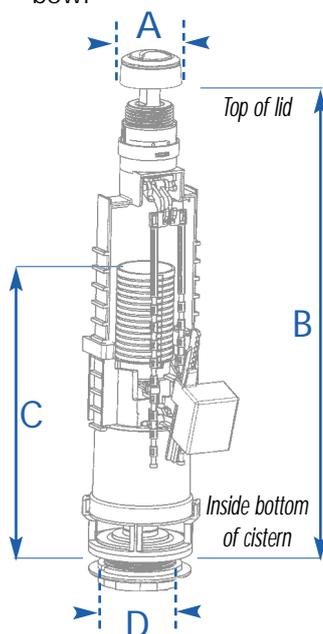

- ① Chrome-plated button assembly
- ② Valve dia. 72 mm
- ③ Strainer seal
- ④ Bowl seal

Range

SKIPPER 36A

Mechanism only

SKIPPER 36A/95L

Mechanism with inlet valve
COMPACT 95L

SKIPPER 36A/95M

Mechanism with inlet valve
monobloc version
COMPACT 95M

