


# OPTIMA 49 Double flush

## DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from Ø 16 to 50mm, with or without escutcheon depending on the diameter
- Button off-center +/- 15mm
- **Adjustable bracket every 12mm, allows maintaining lid**
- Adjustable overflow every 4mm
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforce tightness
- Foam pan seal for compensating pan irregularity
- Available for one-piece toilet

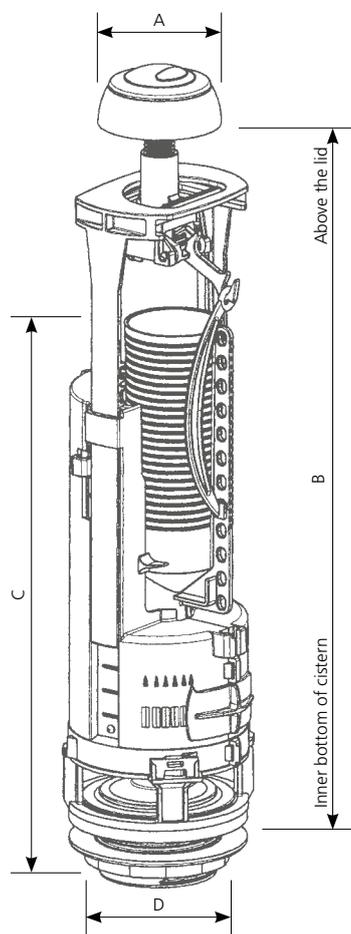

Compatible with:

- Lid hole Ø (A) from 16 to 50mm
- Drainage hole Ø (D) from 58 to 72mm

Adjustable height (B):

- With rosette: from 282 to 430mm (lid hole Ø ranging from 16 to 38mm and 43 to 50mm)
- Without: from 300 to 448mm (lid hole Ø ranging from 39 to 42mm)

Adjustable overflow height (C): 155 to 245mm

	Packing	Packing			Pallet Quantity
		Nb	M <sup>3</sup>	Kg	
OPTIMA 49	Carton box	20	0.072	11.84	480
OPTIMA 49/95L	Carton box	15	0.072	13.53	360
OPTIMA 49/95M	Carton box	15	0.072	15.57	360
OPTIMA 49/COMPACT 99B	Carton box	15	0.072	16.05	360
OPTIMA 49/R24B	Carton box	12	0.072	12.48	288
OPTIMA 49/HANDY 93L	Carton box	12	0.072	12.84	288
OPTIMA 49/HANDY 93B	Carton box	12	0.072	12.48	288

