


OPTIMA 50

Double flush with cable

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from 16 to 50mm, with or without rosette depending on diameter
- Button lid fixing bolt
- **Adjustable overflow every 4mm**
- Cable command allowing side or front offsetting
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforced tightness
- Foam pan seal for compensating pan irregularity
- Available for one-piece toilet

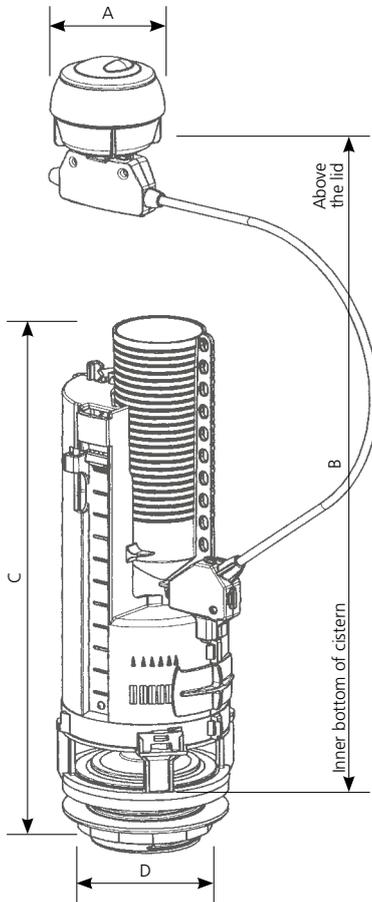

Compatible with:
 - Lid hole (A), Ø from 16 to 50mm
 - Drainage hole (D) Ø from 58 to 72mm

Adjustable height (B)
 - With rosette: from 272 to 480mm (Lid hole (A) Ø 18 to 37mm and > than 44mm)
 - Without: from 287 to 480mm (Lid hole A, Ø 38 to 44mm)

Adjustable overflow height: from 149 to 245mm (C)



	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
OPTIMA 50	Carton box	20	0.072	11.32	480
OPTIMA 50/95L	Carton box	15	0.072	13.14	360
OPTIMA 49/COMPACT 99B	Carton box	15	0.072	11.88	360
OPTIMA 49/COMPACT 99B Plastic	Carton box	15	0.072	15.60	360
OPTIMA 50/HANDY 93L	Carton box	12	0.072	12.48	288
OPTIMA 50/HANDY 93B	Carton box	12	0.072	12.48	288

