


OPTIMA S

Double flush telescopic with cable


Available from June 2013

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from 16 to 50mm., with or without rosette depending on diameter
- Button lid fixing bolt
- **Adjustable telescopic overflow every 10mm**
- Cable command allowing side or front offsetting
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.6l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforced tightness
- Foam pan seal for compensating pan irregularity
- Seal rubber protection



Currently under certification

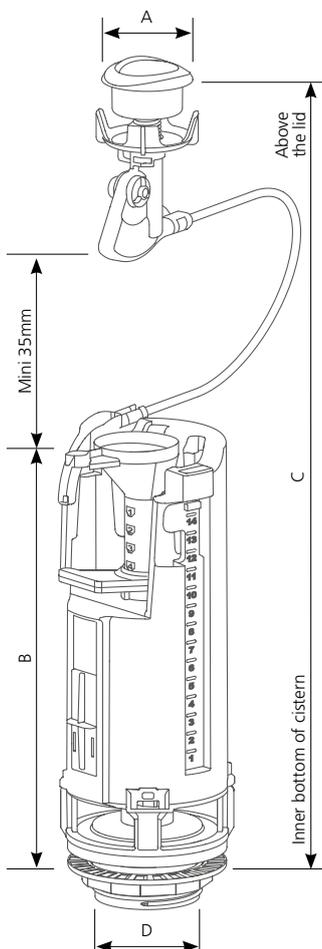

Compatible with:
 Lid hole (A), Ø from 16 to 50mm
 Drainage hole (D) Ø from 58 to 72mm

Adjustable height (B):
 - With rosette: from 305 to 465mm (lid hole Ø ranging from 16 to 38mm and 43 to 50mm)
 - Without: from 320 to 480mm (lid hole Ø ranging from 39 to 42mm)

Adjustable telescopic overflow height (C): 149 to 245mm



	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
OPTIMA S with cable	Carton box	10	0.060	8.34	240
OPTIMA S with cable/QUIETO OD	Carton box	10	0.087	11.30	160
OPTIMA S with cable/95L	Carton box	10	0.087	10.30	160

