

OPTIMA S


Double flush telescopic

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from 16 to 50mm, with or without rosette depending on the diameter
- Button off-center +/- 15mm
- Adjustable bracket every 12mm, allows maintaining lid
- **Adjustable telescopic overflow every 10mm**
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforce tightness
- Foam pan seal for compensating pan irregularity



Currently under certification

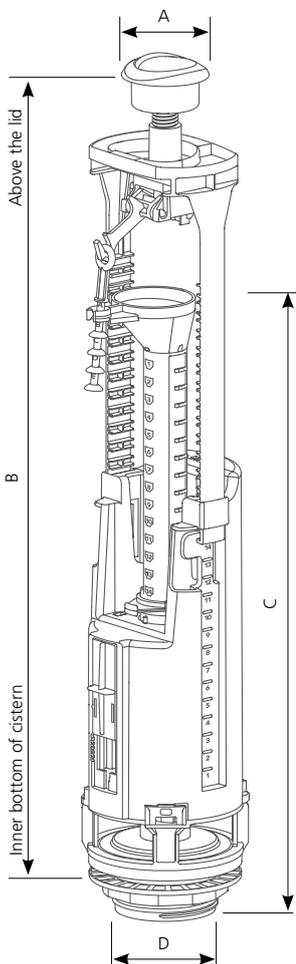

Compatible with:

- Lid hole Ø (A) from 16 to 50mm
- Drainage hole Ø (D) from 58 to 72mm

Adjustable height (B):

- With rosette: from 282 to 432mm (lid hole Ø ranging from 16 to 38mm and 43 to 50mm)
- Without: from 300 to 445mm (lid hole Ø ranging from 39 to 42mm)

Adjustable telescopic overflow height (C): 185 to 325mm



	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
OPTIMA S	Carton box	10	0.060	8.34	240
OPTIMA S/95L	Carton box	10	0.087	10.52	160
OPTIMA S/95M	Carton box	10	0.087	11.88	160
Optima S/QUIETO OD	Carton box	10	0.087	11.30	160

