



OPTIMA 49



■ **Compact Dual Flush Valve**

■ **Water economizer**

(30m³/ year for a four person family)

■ **Universal adaptation**

■ **Easy installation and setting**
Self-adjusting control button

(World patent)

■ **Lid fixation**

■ **Adjustable small flush**

(from 3 to 4,5 liters)

■ **Adjustable dead water level**

■ **Powerful rinsing flow rate**

■ **Tested for 200.000 cycles**

- **NF Normes Françaises** 
- **UK water supply regulation**

■ **Resists corrosion and wear**

■ **Easy servicing**

■ **Delivered complete**

(with bowl seal and flush cistern attaching screws)

■ **10 years guarantee**

(Except rubber parts)

Sanitary expertise and consideration for water...

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04


E-mail: contact@siamp.com

Site Internet : <http://www.siamp.com>


TECHNICAL CHARACTERISTICS

SPARES PARTS :


OPTIMA 49

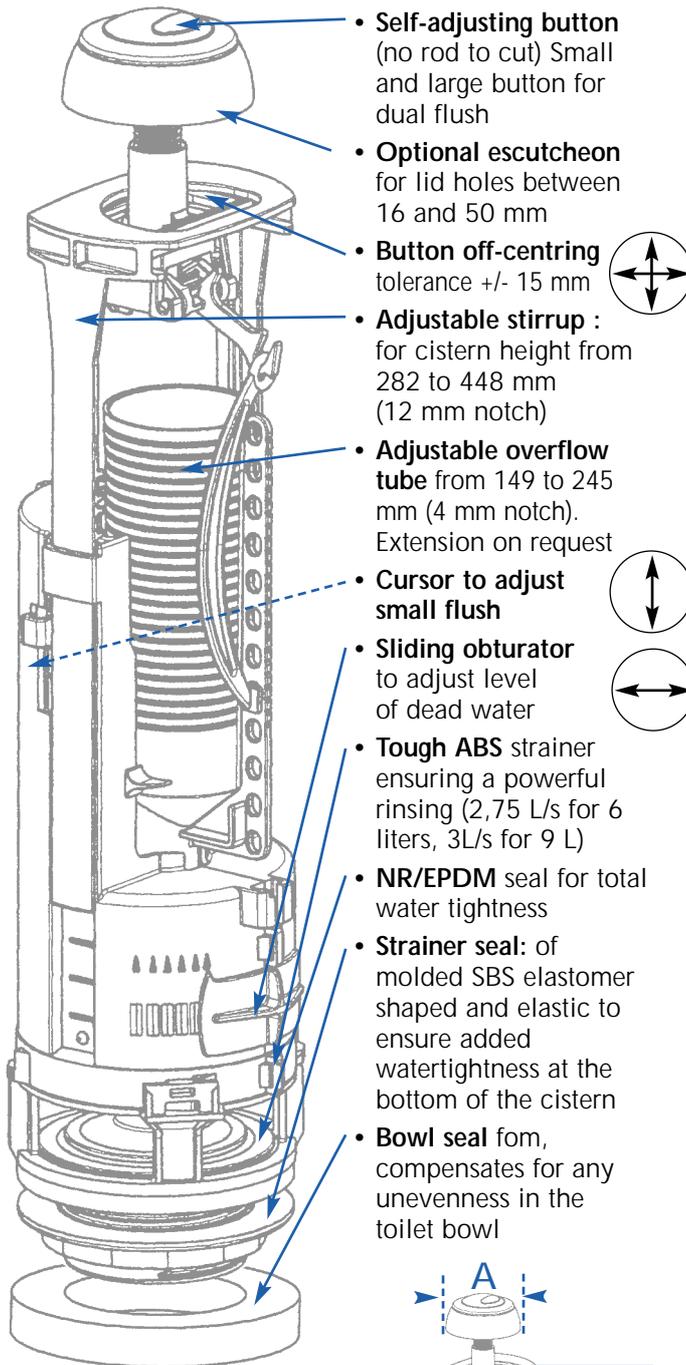

- **Self-adjusting button** (no rod to cut) Small and large button for dual flush
- **Optional escutcheon** for lid holes between 16 and 50 mm
- **Button off-centring** tolerance +/- 15 mm
- **Adjustable stirrup** : for cistern height from 282 to 448 mm (12 mm notch)
- **Adjustable overflow tube** from 149 to 245 mm (4 mm notch). Extension on request
- **Cursor to adjust small flush**
- **Sliding obturator** to adjust level of dead water
- **Tough ABS strainer** ensuring a powerful rinsing (2,75 L/s for 6 liters, 3L/s for 9 L)
- **NR/EPDM seal** for total water tightness
- **Strainer seal**: of molded SBS elastomer shaped and elastic to ensure added watertightness at the bottom of the cistern
- **Bowl seal** fom, compensates for any unevenness in the toilet bowl

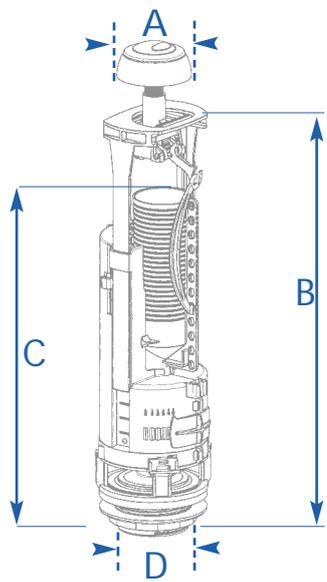

- **Compatible with:**
 - Lid hole (A) dia. from 16 to 50 mm
 - Drain hole (D) dia. from 58 to 72 mm
- **Adjustable height (B):**
 - From 282 to 448 mm
- **Adjustable overflow height (C):**
 - From 149 to 245 mm

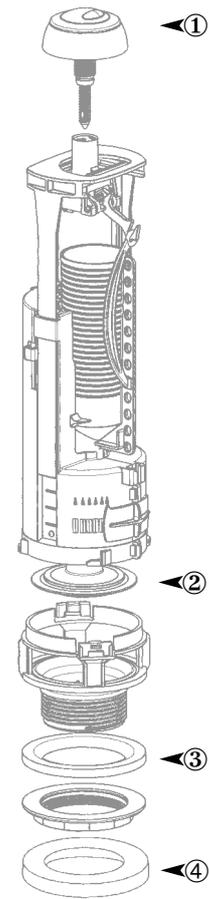

- ① Chrome-plated button assembly
- ② Valve \varnothing 72 mm
- ③ Strainer seal
- ④ Bowl seal

Range

OPTIMA 49

Mechanism only

OPTIMA 49/95L

Mechanism with side inlet valve
COMPACT 95L

OPTIMA 49/99B

Mechanism with bottom inlet valve
COMPACT 99B

