



OPTIMA 50



- **Compact Dual Flush Valve**
- **Water economizer**
(30m³/ year for a four person family)
- **Universal adaptation**
- **Easy installation and setting**
Remote control push button
- **Adjustable small flush**
(from 3 to 4,5 liters)
- **Adjustable dead water level**
- **Powerful rinsing flow rate**
- **Tested for 200.000 cycles**
 - UK water supply regulation
- **Resists corrosion and wear**
- **Easy servicing**
- **Delivered complete**
(with bowl seal and flush cistern attaching screws)
- **10 years guarantee**
(Except rubber parts)

Sanitary expertise and consideration for water...

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04


E-mail: contact@siamp.com

Site Internet : <http://www.siamp.com>


TECHNICAL CHARACTERISTICS

SPARES PARTS :

OPTIMA 50

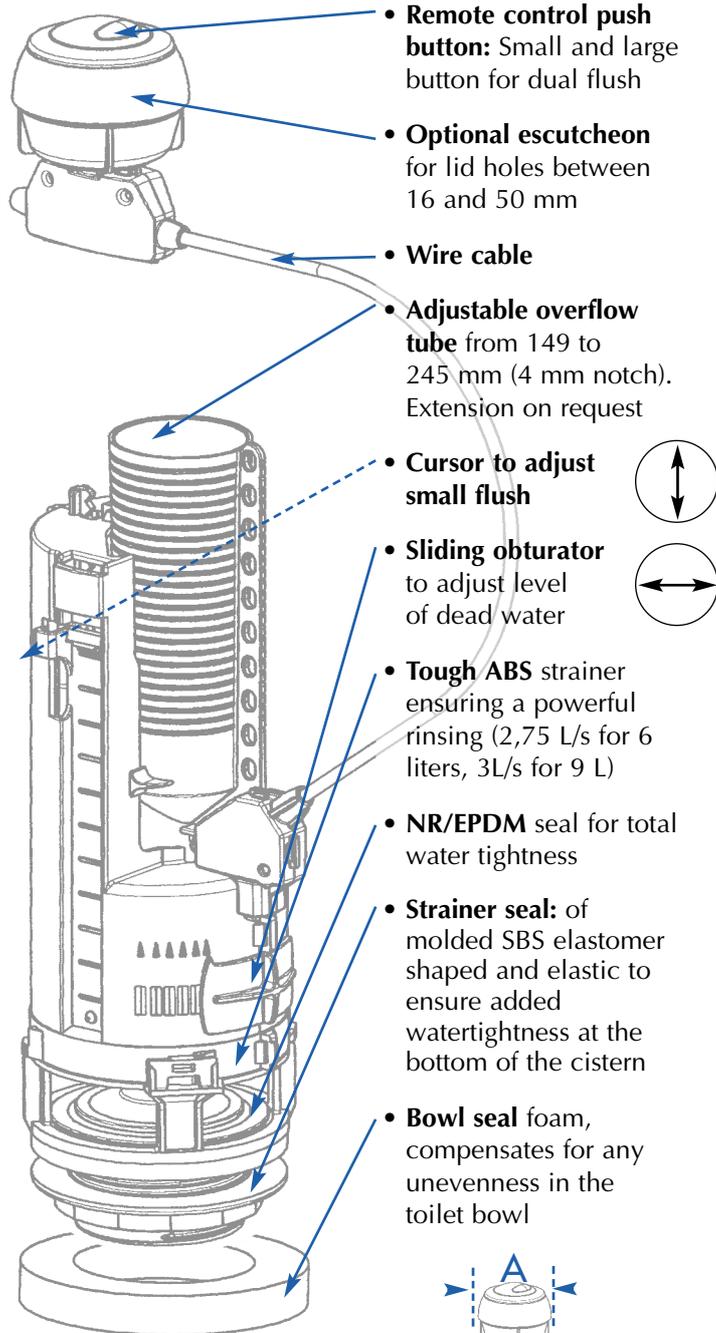

- **Remote control push button:** Small and large button for dual flush
- **Optional escutcheon** for lid holes between 16 and 50 mm
- **Wire cable**
- **Adjustable overflow tube** from 149 to 245 mm (4 mm notch). Extension on request
- **Cursor to adjust small flush** 
- **Sliding obturator** to adjust level of dead water 
- **Tough ABS strainer** ensuring a powerful rinsing (2,75 L/s for 6 liters, 3L/s for 9 L)
- **NR/EPDM seal** for total water tightness
- **Strainer seal:** of molded SBS elastomer shaped and elastic to ensure added watertightness at the bottom of the cistern
- **Bowl seal foam,** compensates for any unevenness in the toilet bowl

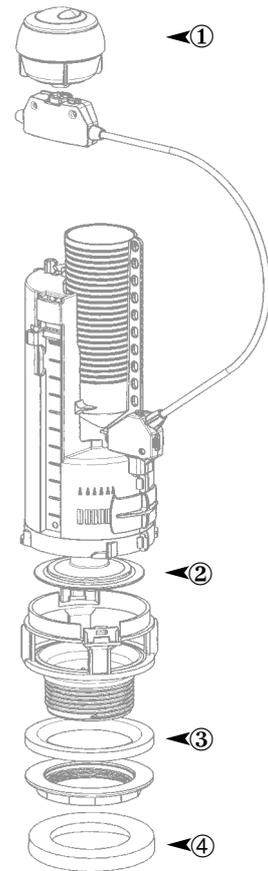

- ① **Chrome-plated button assembly**
- ② **Valve dia. 72 mm**
- ③ **Strainer seal**
- ④ **Bowl seal**

- Compatible with:


- Lid hole (A) dia. from 16 to 50 mm
- Drain hole (D) dia. from 58 to 72 mm

- Adjustable height (B):

- From 272 to 480 mm

- Adjustable overflow height (C):

- From 149 to 245 mm

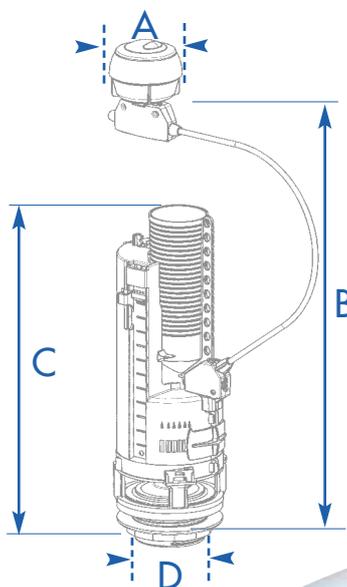

Range

OPTIMA 50

Mechanism only

OPTIMA 50/95L

Mechanism with side inlet valve
COMPACT 95L

OPTIMA 50/99B

Mechanism with bottom inlet valve
COMPACT 99B