

STANDARDS
NF • SASO

10
YEAR
GUARANTEE



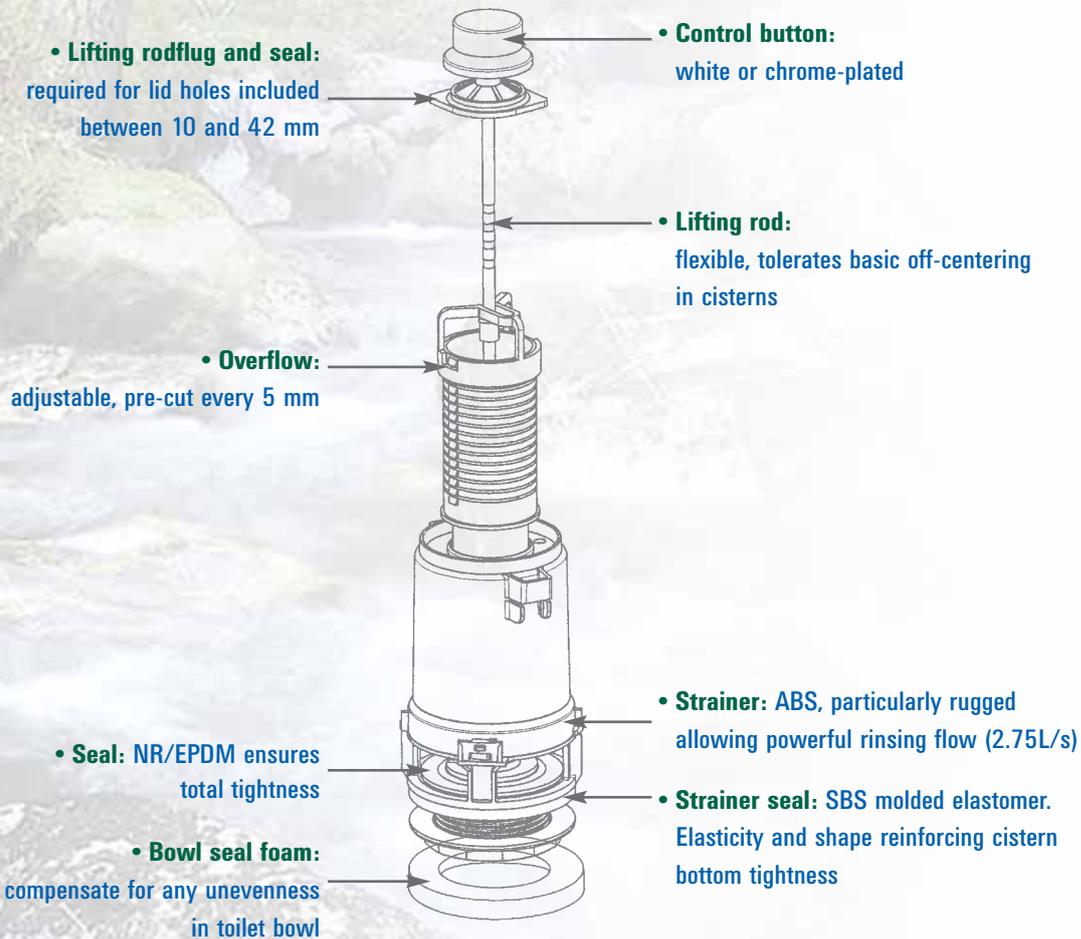
Traditionnal



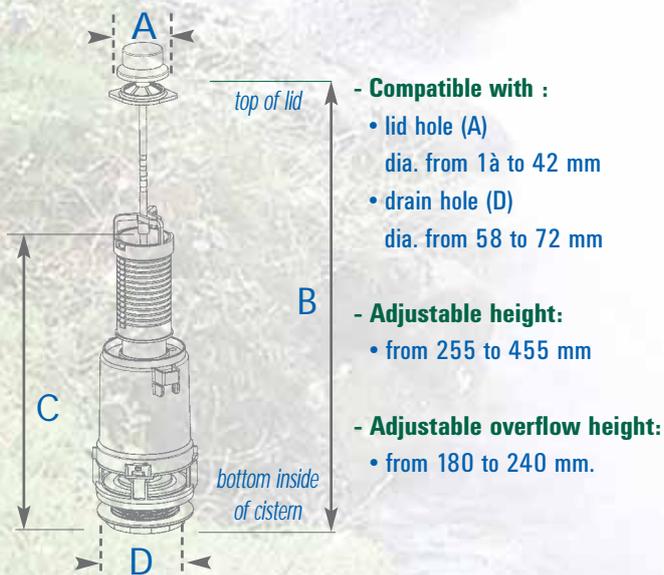
PULLER MECHANISM

CLASSIC 42

Technical characteristics

- 
- **Lifting rodflug and seal:** required for lid holes included between 10 and 42 mm
 - **Control button:** white or chrome-plated
 - **Lifting rod:** flexible, tolerates basic off-centering in cisterns
 - **Overflow:** adjustable, pre-cut every 5 mm
 - **Seal:** NR/EPDM ensures total tightness
 - **Strainer:** ABS, particularly rugged allowing powerful rinsing flow (2.75L/s)
 - **Strainer seal:** SBS molded elastomer. Elasticity and shape reinforcing cistern bottom tightness
 - **Bowl seal foam:** compensate for any unevenness in toilet bowl

Sizes

- 
- **Compatible with :**
 - lid hole (A)
dia. from 1 à 42 mm
 - drain hole (D)
dia. from 58 to 72 mm
 - **Adjustable height:**
 - from 255 to 455 mm
 - **Adjustable overflow height:**
 - from 180 to 240 mm.

Also available for *Aspirambo*
Porcher ASP 43 cistern

