



STANDARDS  
**kiwa • WATERMARK**



Water economizer



DUAL FUSH MECHANISM

**OPTIMA 49**

## Technical characteristics

• **Escutcheon:** for all lid holes included between 18 and 50 mm

• **Self-adjusting button:**  
*Small button = single flush*  
*Large button = dual flush*

• **Adjustable stirrup:**  
 for cistern height  
 from 282 to 448 mm  
 (12 mm notch)

• **Button off-centering:**  
 tolerance +/- 15 mm



• **Small flush cursor**  
 adjustable  
 from 3L to 4.5L



• **Adjustable overflow tube:**  
 from 149 to 245 mm (4 mm notch)

• **Strainer:** ABS, particularly rugged allowing powerful rinsing flow (2.75L/s)


• **Residual water adjusting valve**




• **Bowl seal foam:**  
 compensate for any unevenness in toilet bowl

• **Seal:** NR/EPDM, ensures total tightness

• **Strainer seal:** SBS molded elastomer. Elasticity and shape reinforcing cistern bottom tightness

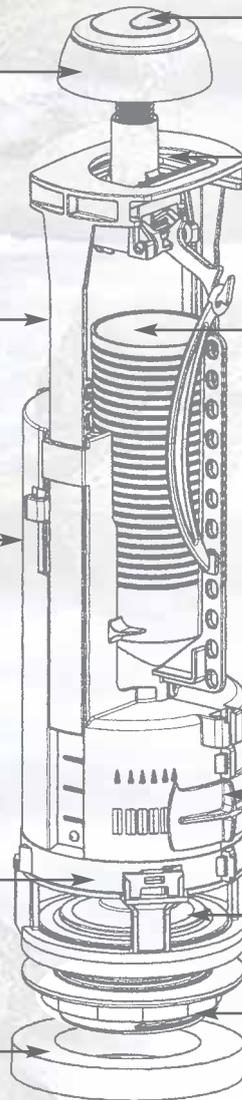

## Sizes

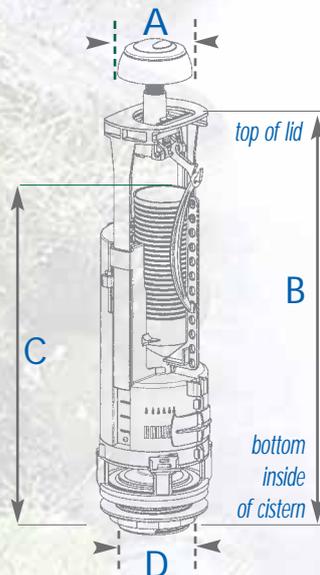

- **Compatible with:**

- lid hole (A) dia. 18 to 50 mm
- drain hole (D) dia. 58 to 72 mm

- **Adjustable height (B):**

- from 285 to 450 mm

- **Adjustable overflow height (C):**

- from 155 to 245 mm