



MSE Brio Cable

Double flush

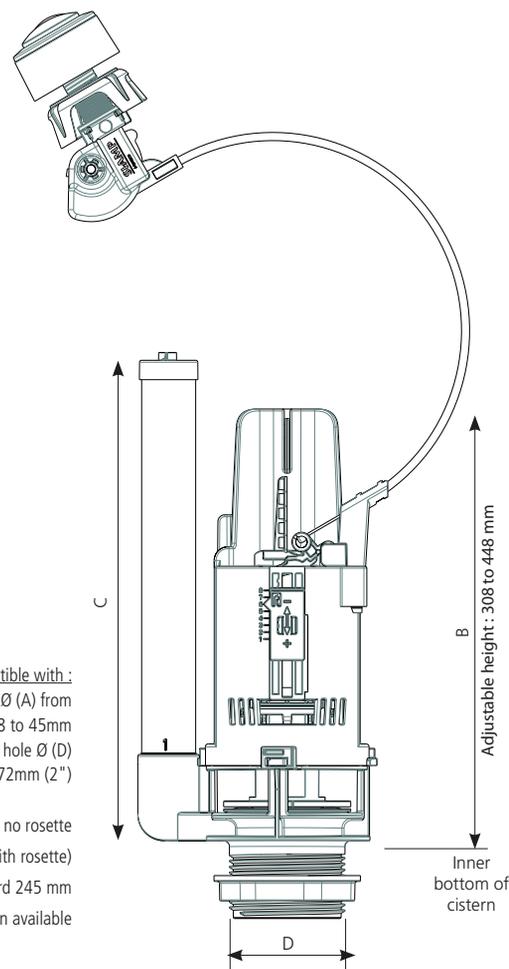

- Easy to adjust and service
- To be installed into plastic or ceramic cisterns
- **Actuation effort below 20N**
- For lid holes ranging from Ø 18 to 45mm, with or without rosette depending on the diameter
- Button off-center +/- 15mm
- Adjustable operating height
- **Adjustable residual water** on half and full flush
- High flow rate plug (2.75l/s)
- Rubber or silicone seal valve
- Several heights of overflow and telescopic version available

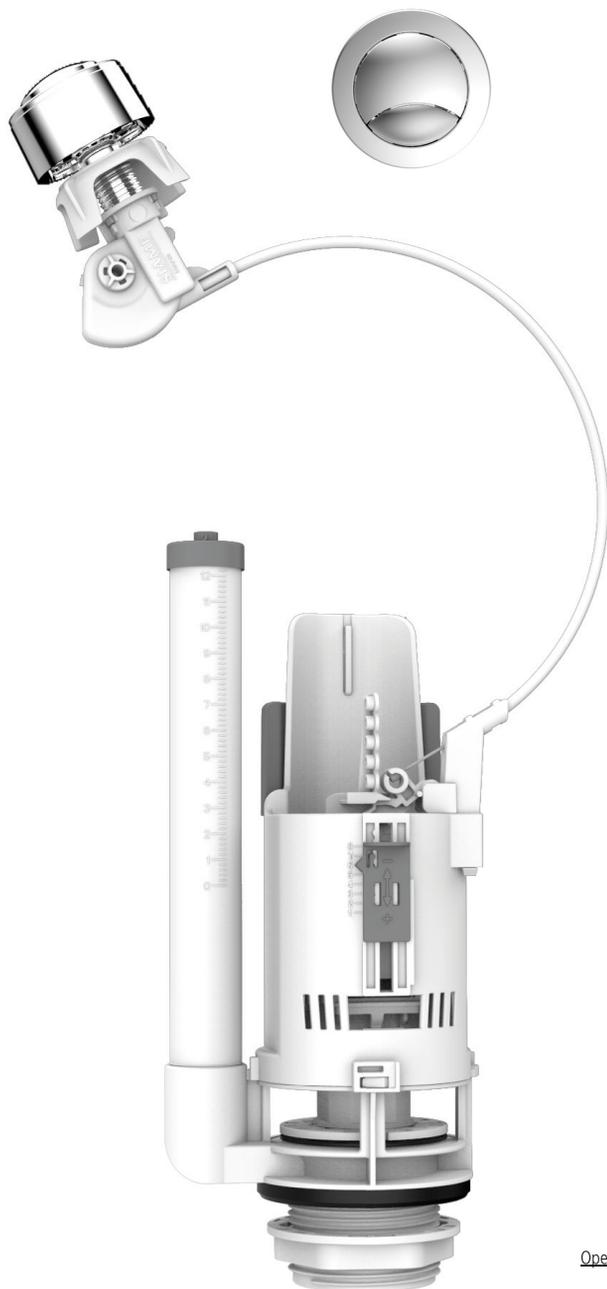

Compatible with :
 - Lid hole Ø (A) from 18 to 45mm
 - Drainage hole Ø (D) from 60 to 72mm (2")

Operating height (B): from 308 to 448 mm with no rosette (and 330 to 470 with rosette)

Overflow (C): Standard 245 mm

Several heights and telescopic version available