




MSE Brio

Double flush




MAINTAINS THE LIDS

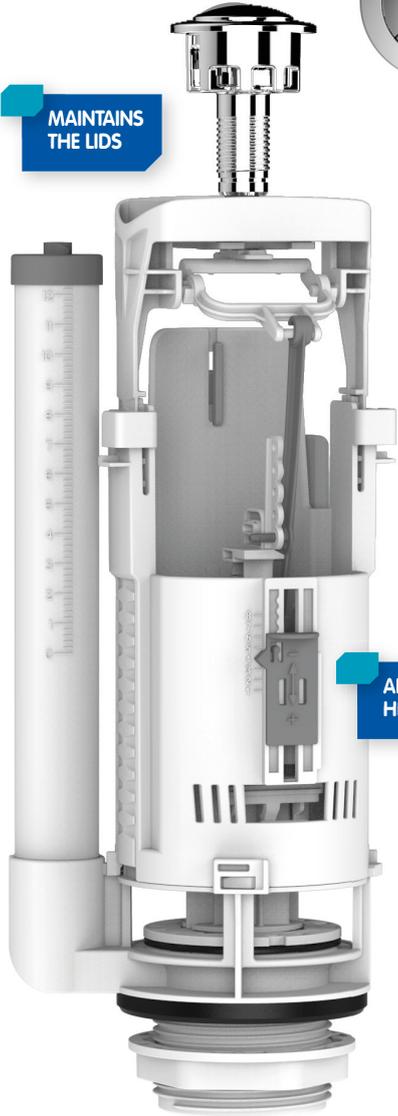

ADJUSTABLE HEIGHT

- To be installed into plastic or ceramic cisterns
- **Actuation effort below 20N**
- For lid holes ranging from Ø 18 to 45mm, with or without rosette depending on the diameter
- Button off-center +/- 15mm
- **Adjustable bracket, allows maintaining lid**
- Excentered overflow
- **Adjustable small flush**
- **Dead water level**
- High flow rate plug (2.75l/s)
- Silicone seal valve
- SBS moulded elastomer or foam plug seal

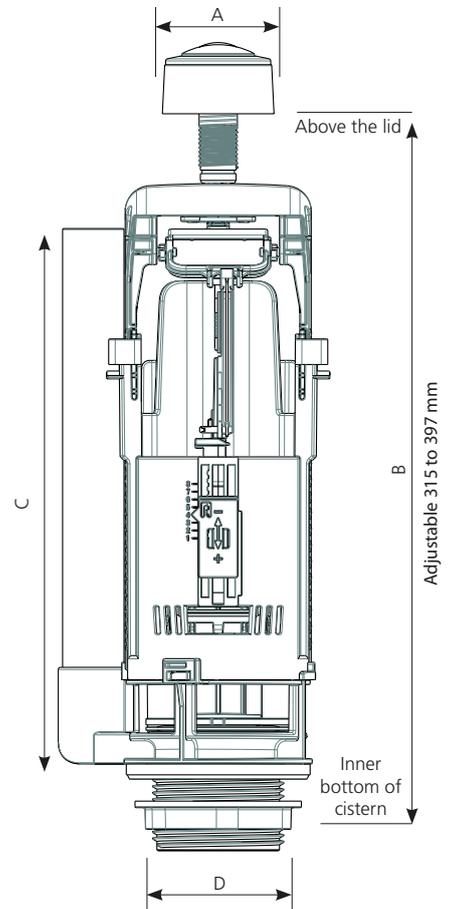

Compatible with :

- Lid hole Ø (A) from 18 to 45mm
- Drainage hole Ø (D) from 60 to 72mm

Adjustable height (B) :

- With rosette: from 292 to 337mm (lid hole Ø ranging from 18 to 37mm and 41 to 45mm)
- Without: from 315 to 360mm (lid hole Ø ranging from 38 to 41mm)

Overflow (C): Standard 245 mm

Several heights and telescopic version available