



### MSE Brio Pads Double flush

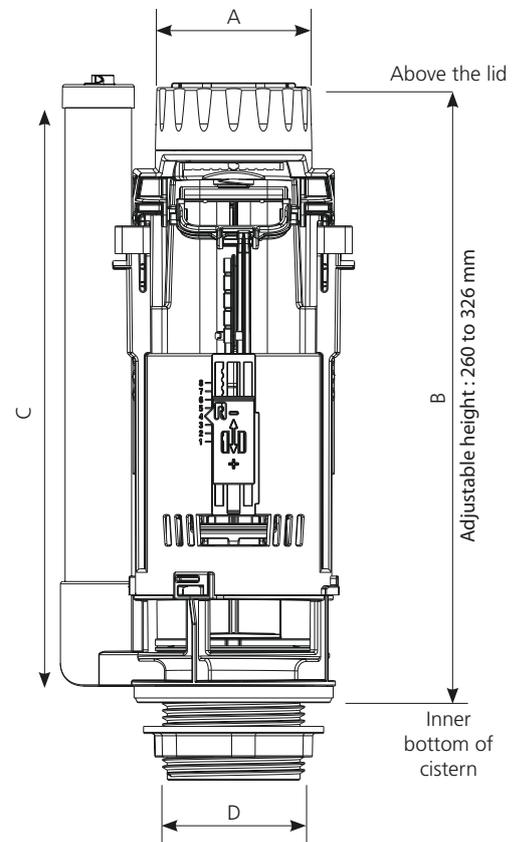

- To be installed into plastic or ceramic cisterns
- Adjustable stirrup height, from 260 to 290 mm
- Adjustable residual water on half and full flush
- **Operating adjustable height** : from 314 mm to 440 mm, depending on rods length
- High flow rate plug (2.75l/s)
- Rubber ou silicone seal valve
- Various other buttons available for actuation Ø40 mm, Ø50 mm, Ø60 mm

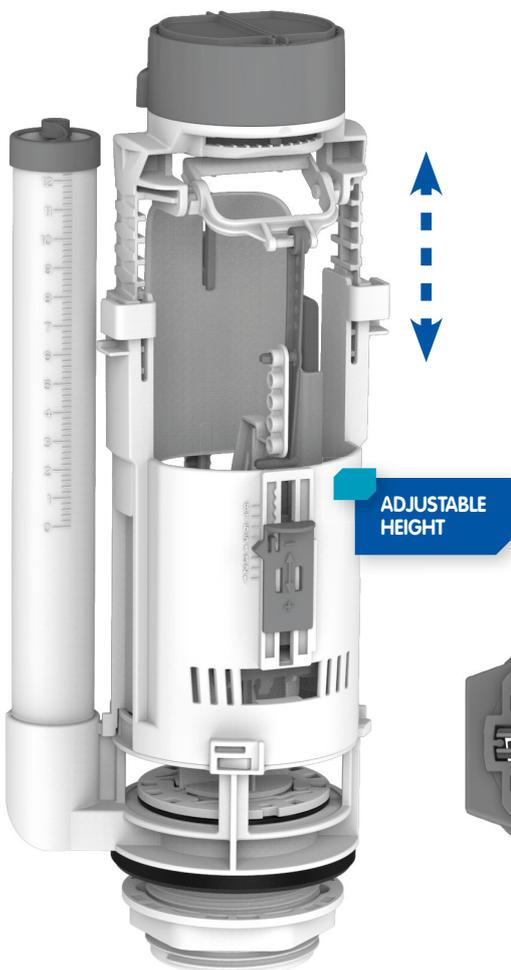


Compatible with :  
 - Lid hole Ø (A) 40 mm  
 - Drainage hole Ø (D) from 60 to 72 mm (2")

Adjustable height (B) : 260 to 326 mm  
 Operating height : from 314 to 440 mm  
 Overflow (C) : Standard 250 mm  
 Several heights and telescopic version available




## ROD TYPE BUTTONS RANGE

**BT 40** • For lid holes ranging from  $\varnothing$  40 to 45 mm  
• Lid fixing nut

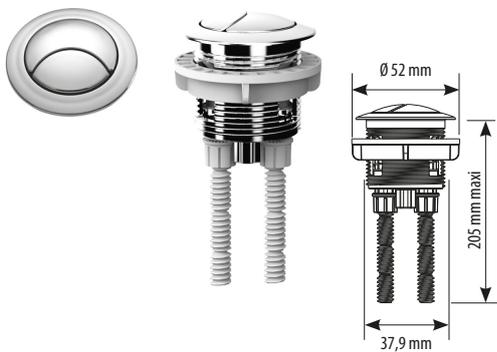


*New* **BT 50**

• For lid holes ranging from  $\varnothing$  49 to 52 mm  
• Lid fixing nut

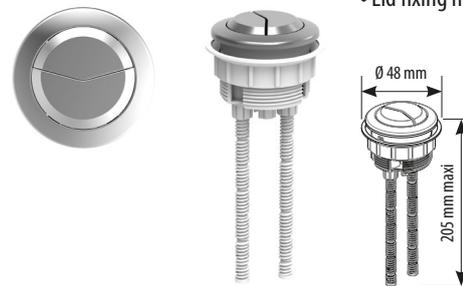

**BT 60**  
• For lid holes ranging from  $\varnothing$  60 to 65 mm  
• Lid fixing nut

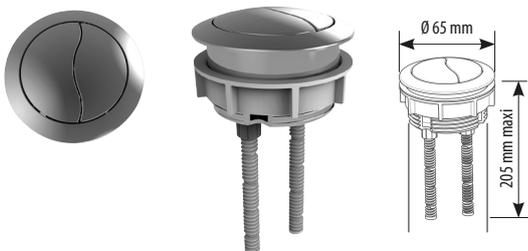

**BT 70**  
• For oval lid holes  
• Lid fixing by jumper



**BT 71**  
• For oval lid holes  
• Lid fixing by jumper



• For rectangle lid holes  
• Lid fixing by jumper



**BT 72**  
• Actuators pads