


OPTIMA 60 Double flush

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- **Adjustable bracket every 12mm**
- Adjustable overflow every 4mm
- **Adjustable small flush**
- **Adjustable dead water level**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforce tightness
- Foam pan seal for compensating pan irregularity

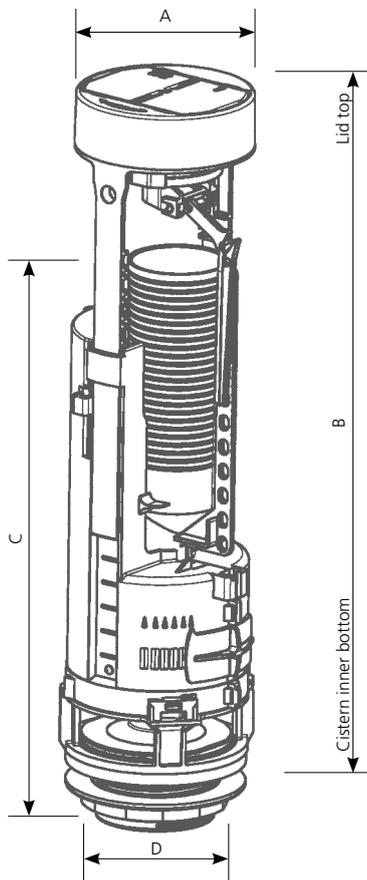

Compatible with:

- **BT40** lid hole Ø (A) from 40 to 45 mm / 1.58" to 1.77"
- **BT70** Specific oval shape
- drainage hole Ø (D) from 50 / 1.96" to 72mm

Adjustable height (B):

- **BT40** from 308 to 500 mm. 12.12» to 19.6»
- **BT70** from 319 to 472 mm. 12.56» to 18.58»

Adjustable overflow height (C): 155 to 245mm. / 6.1» to 9.64»



	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
OPTIMA 60	Plastic bag	20	0.072	9.20	480

