


SKIPPER 36A Double flush

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- Push button: **double flush**
- **Actuation effort below 20N**
- For lid holes ranging from 18 to 50mm, with or without rosette depending on diameter
- Adjustable bracket, allows maintaining lid
- **Adjustable overflow every 5mm**
- **Adjustable small flush**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforced tightness
- Foam pan seal for compensating pan irregularity

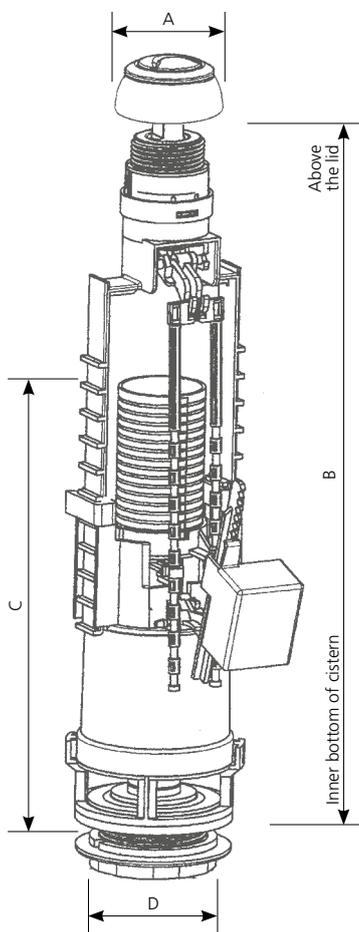

Compatible with:

- Lid hole (A), Ø 18 to 50mm
- Drainage hole (D) Ø from 58 to 72mm

Adjustable height (B):

- With rosette: from 293 to 447mm (Lid hole (A) Ø 18 to 37mm)
- Without: from 312 to 468mm (Lid hole A, Ø 38 to 42mm)

Adjustable overflow height: 180 to 240mm (C)



	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
SKIPPER 36A	Carton box	10	0.060	6.66	240
SKIPPER 36A/95L	Carton box	10	0.087	9.76	160
SKIPPER 36A/95M	Carton box	10	0.087	11.12	160

