



OPTIMA 50 For Less Able

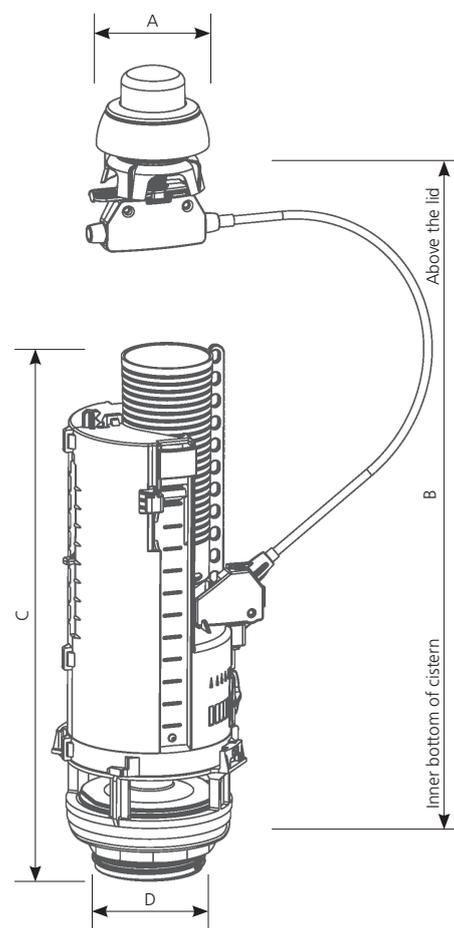

DESCRIPTION

- To be installed into plastic or ceramic cisterns
- External single flush push button for an easy use
- **Actuation effort below 20N**
- For lid holes ranging from 16 to 42mm, with or without rosette depending on diameter
- Button lid fixing bolt
- **Adjustable overflow every 4mm**
- Cable command allowing side or front offsetting
- **Adjustable dead water level**
- High flow rate plug (2.75l/s), made from ABS, heavy duty design
- NR/EPDM valve for a total tightness
- SBS moulded elastomer plug seal, shape and elasticity reinforced tightness
- Foam pan seal for compensating pan irregularity

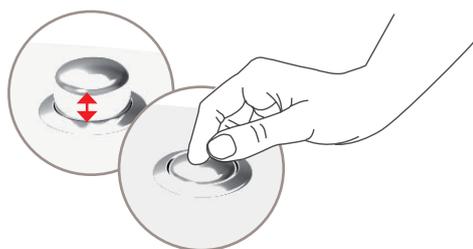

Compatible with:
 - Lid hole Ø (A) from 16 to 42mm
 - Drainage hole Ø (D) from 58 to 72mm

Adjustable height (B):
 - With rosette: from 272 to 465mm (lid hole Ø ranging from 16 to 38mm and 43 to 50mm)
 - Without: from 287 to 480mm (lid hole Ø ranging from 39 to 42mm)

Adjustable telescopic overflow height (C): 149 to 245mm

	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
OPTIMA 50 for Less Able	Carton box	10	0.060	8.34	240