


ECO 28 SF Low level



DESCRIPTIF :

- To be installed onto floor standing pan
- **Low level installation**
- **Wall fixing**
- **Simple flush top pad command**
- Lid and cistern made from PS
- **Ceramic aspect**
- Cistern maximum water volume capacity 8l with PSE insulation, 9.5l without PSE insulation
- Simple flush outlet valve, 6l factory preset.
- Adjustable counter pressure (hydraulic) float valve, 6l factory preset, outer water connexion 3/8 M
- **Right, left or inner center water connection**
- Wall angle top valve 1/2 M, pipe for inlet valve connexion, chrome plated
- Height adjustable supply bent
- Wall fixing accessories

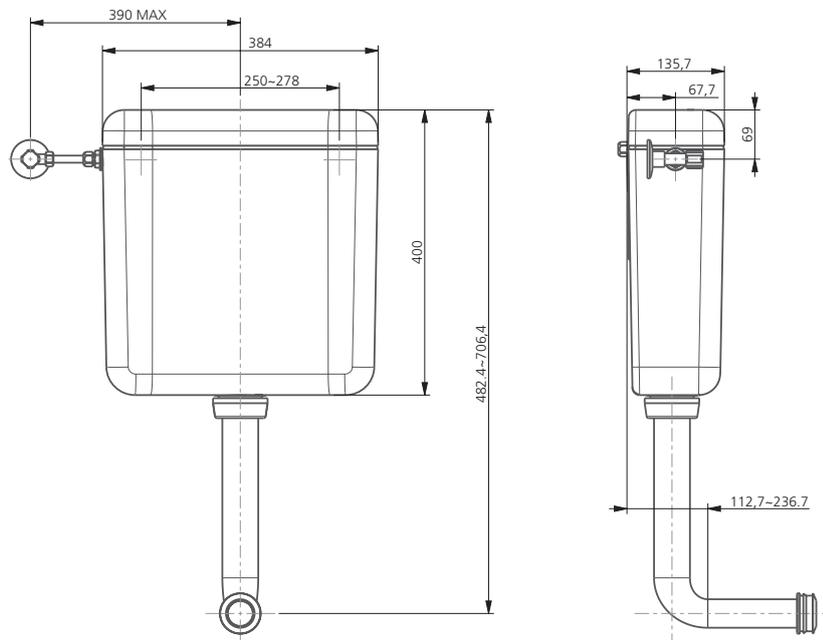

ECO 28 DF Low level



DESCRIPTIF :

- To be installed onto floor standing pan
- **Low level installation**
- **Wall fixing**
- **Double flush top pad command**
- Lid and cistern made from PS
- **Ceramic aspect**
- Cistern maximum water volume capacity 8l with PSE insulation, 9.3l without PSE insulation
- Double flush outlet valve, 3/6l factory preset.
- Adjustable counter pressure (hydraulic) float valve, 6l factory preset, outer water connexion 3/8 M
- **Right, left or inner center water connection**
- Wall angle top valve 1/2 M, pipe for inlet valve connexion, chrome plated
- Height adjustable supply bent
- Wall fixing accessories

