

## Technical characteristics

- **Material:**
  - cover: melamine (anti-cigarette burns)
  - bowl: styrene compound anti-UV recyclable treated
- **Insulation:** interior shell of expanded polystyrene
- **Flushing mechanism:** **NF**
  - Dual flush
  - Small flush adjustable from: 3 to 4.5 liters
- **Float valve:** **NF**
  - 1st category silencer (- 20 dB)
  - left or right side supply, nickel-plated brass end 3/8



- **Cistern:** maximum capacity 9L (adjustable water level)

- **General-purpose attachments:**




## Complementary accessories

Low-level transformation kit for attached RONDO




General-purpose supply kit for attached RONDO

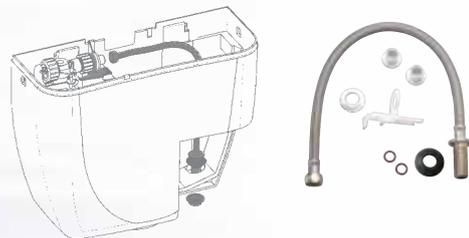

## Size

- **Depth (P)** 150 mm
- **Width (L)** 430 mm
- **Height (H)** 380 mm
- **Supply holes (A)** 53 mm from rear  
(C) 320 mm from bottom
- **Center distance adjusting range of bowl (E)** from 125 to 235 mm
- **Adjustment for attachments (R)** 66 to 90 mm

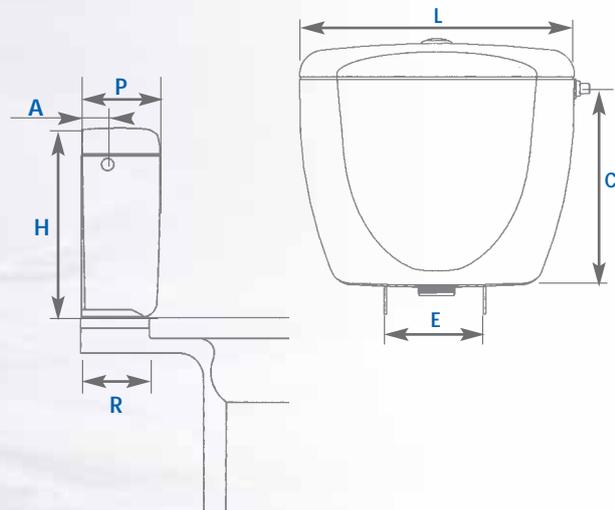



STANDARDS  
**NF** • **kiwa**

**10**  
YEAR  
GUARANTEE



CLOSE COUPLED CISTERN



Close coupled cistern  
Dual flush

**NORMA**