

RONDO DV Technical characteristics

- **Material:**
 - Ceramic look
 - Styrene compound anti-UV recyclable treated
- **Insulation:** interior shell of expanded polystyrene



- **Flushing mechanism:** 
 - Dual flush
 - Small flush adjustable from: 3 to 4.5 liters
- **Float valve:** 
 - 1st category silencer (- 20 dB)
 - left or right side supply,
 - nickel-plated brass end 3/8



- **Cistern:** maximum capacity 9L (adjustable water level)



- **General-purpose attachments:**




Complementary accessories

Low-level transformation kit for attached RONDO




General-purpose supply kit for attached RONDO

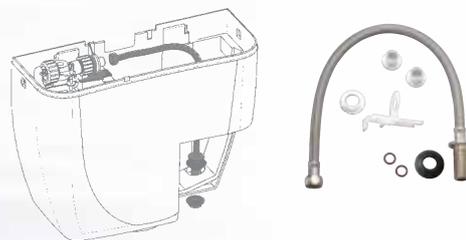

RONDO DV Sizes

- **Depth (P)** 150 mm
- **Width (L)** 430 mm
- **Height (H)** 410 mm
- **Supply holes** (A) 53 mm from rear
(C) 320 mm from bottom
- **Center distance adjusting range of bowl (E)** from 125 to 235 mm
- **Adjustment for attachments (R)** 66 to 90 mm

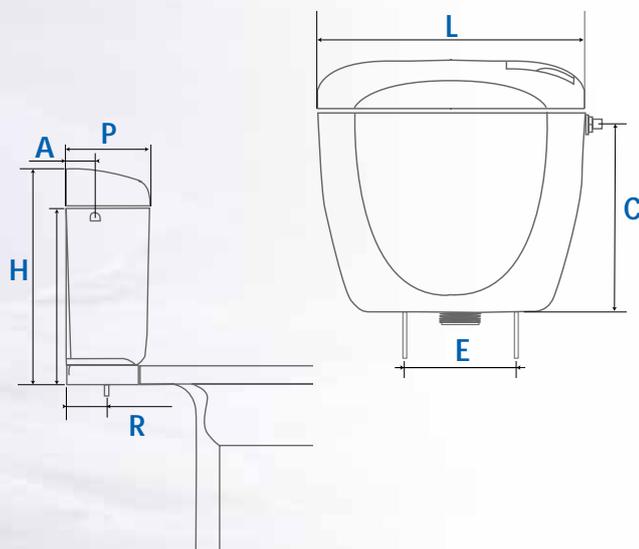



CLOSE COUPLED CISTERN



Close coupled cistern
Dual flush

RONDO

Technical characteristics

RONDO MV

- **Material:**
 - Ceramic look
 - Styrene compound anti-UV recyclable treated
- **Insulation:** interior shell of expanded polystyrene
- **Cistern:** maximum capacity 9L (adjustable water level)

- **General-purpose attachments:** adjustable attachments (excentric)
- **Equipment:** Single flush flushing mechanism **NF**
 - interruptible
- **Float valve:** **NF**
 - 1st category silencer (- 20 dB)
 - left or right side supply, nickel-plated brass end 3/8

RONDO H

- **Material:**
 - Ceramic look
 - Styrene compound anti-UV recyclable treated
- **Insulation:** interior shell of expanded polystyrene
- **Cistern:** maximum capacity 9L (adjustable water level)


- **Equipment:** Single flush flushing mechanism **NF**
- **Float valve:** **NF**
 - 1st category silencer (- 20 dB)
 - left or right side supply, nickel-plated brass end 3/8
- **Connection accessories not supplied:** (down-pipe and connection)

RONDO H complementary accessories



RONDO H Sizes

- **Depth (P)** 150 mm
- **Width (L)** 430 mm
- **Height (H)** 400 mm
- **Supply holes** (A) 53 mm from rear
(C) 320 mm from bottom
- **Drain for pipe dia.** 32 mm
- **Attaching center distance** 220 mm

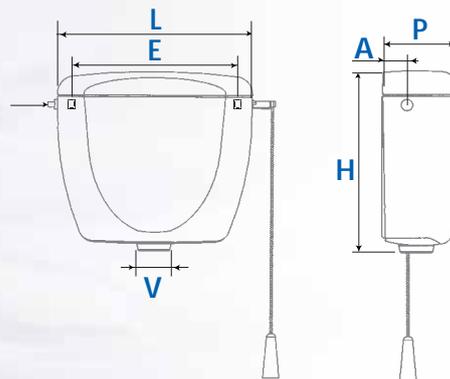

Other versions

RONDO MV



RONDO H



Existe en commande pneumatique

RONDO