

BRIO 752 Hydraulic




Available
in Q4 2013

DESCRIPTION

- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- **Hydraulic closure** (no water hammer shock)
- The **case** allows the closing of the valve at a **constant level**
- Adjustable water level
- **Silent**
- **Anti-backflow function**
 - 1/2 plastic end-fitting (also available in 1/2 and 3/8 brass, 3/8 plastic)
 - **Flow rate:** 0.16 l/s at 3 bars
 - **Pressure function range:** from 0.5 to 16 bars
 - Available in low pressure with a filter
 - **Twin screw** / adjustment in one movement



Currently under certification

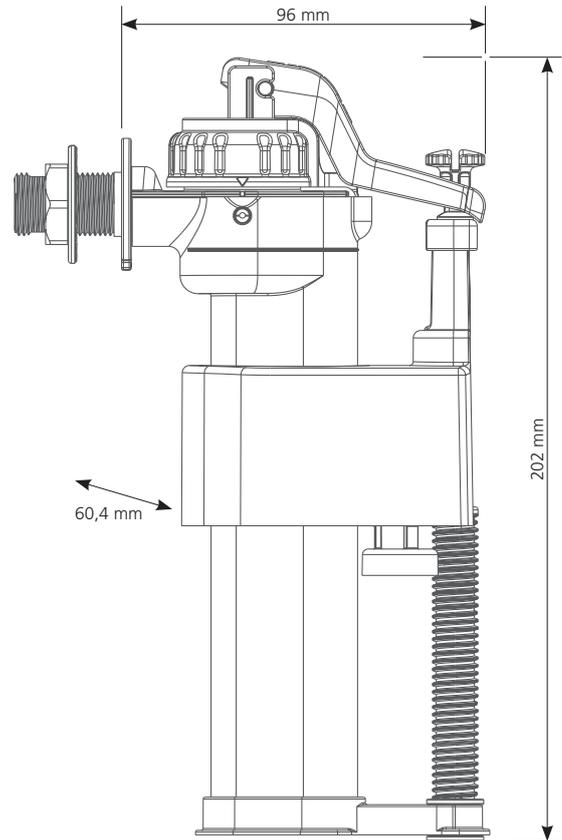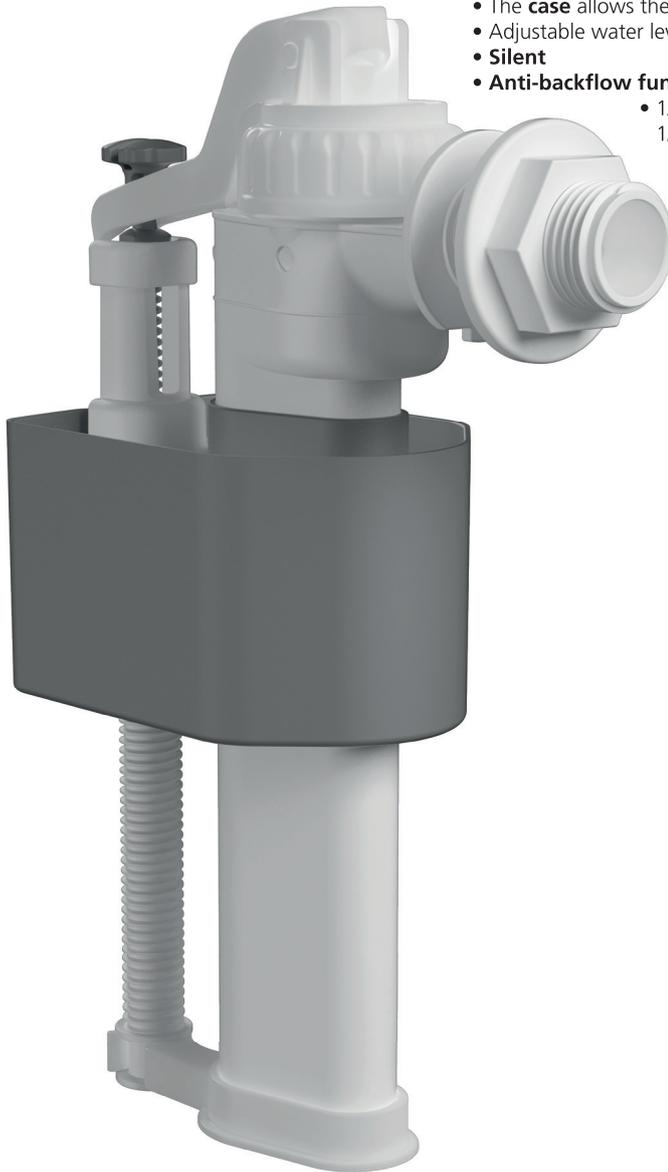

	Packing	Packing			Pallet Quantity
		Nb	M ³	Kg	
BRIO 752	Plastic bag	40	0.072	11	960