


# COMPACT 95L Hydraulic

## DESCRIPTION

- **Compact**
- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- **Hydraulic closure** (no water hammer shock)
- Adjustable water level
- **Silent** 
- Tube can be cut for low height cisterns
- **Anti-backflow function**
- Filter can be reached without disconnecting from water supply
- Nickel coated 3/8 brass end-fitting, 1/2 plastic as an option
- **Flow rate:** 0.14 l/s at 3 bars
- **Pressure function range:** from 0.5 to 16 bars

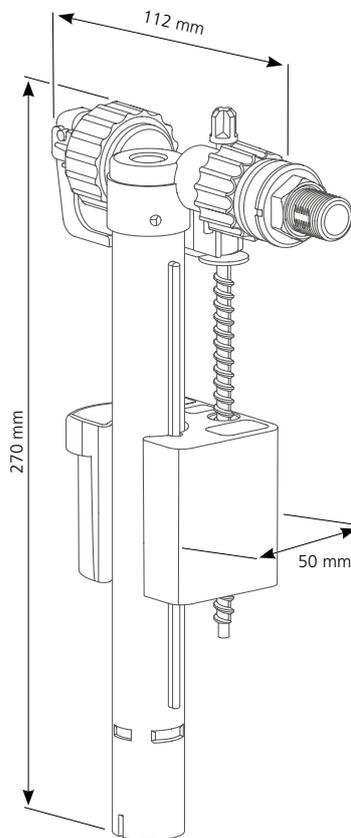

INLET VALVES



	Packing	Packing			Pallet Quantity
		Nb	M <sup>3</sup>	Kg	
COMPACT 95L	Box	18	0.06	6.24	396

