



### BRIO 752/755/757 OD - Delayed action



**BRIO  
752 OD**



**BRIO  
755 OD**

Save up to  
**5L OF WATER**  
per day\*

**BRIO  
757 OD**






- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- **Hydraulic closure**
- The delayed action opening case delays the filing of the cistern while the flush valve is open
- Adjustable water level (Twin screw / adjustment in one movement)
- **Quiet**
- **Anti-backflow function**
- **Flow rate:** 0.14 l/s at 3 bars
- **Pressure function range:** from 0.5 to 16 bars
- Available in low pressure with a filter
- Refill function as an option



AVAILABLE IN  
**1/2" AND 3/8" BRASS**



AVAILABLE IN 1/2"  
AND 3/8" PLASTIC  
(and 15/16" for bottom version)

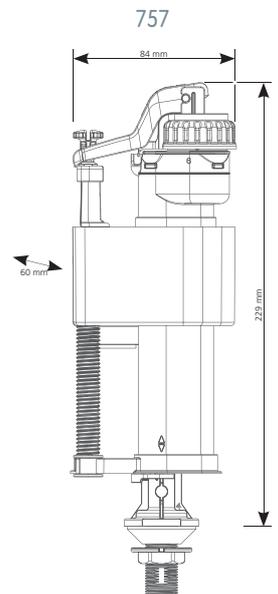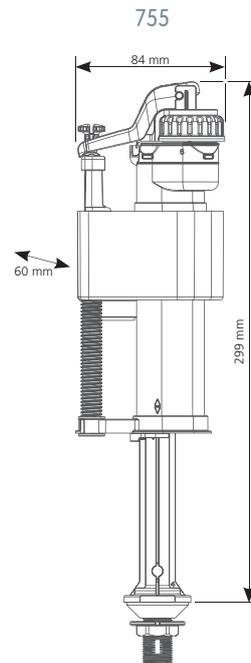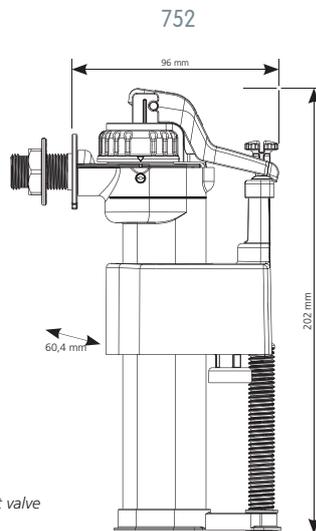

\*Based upon a 4-people-family consumption when replacing a standard inlet valve