




BRI0 755 Telescopic OD - Delayed action



Save up to
5L OF WATER
per day*



- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- **Hydraulic closure**
- The delayed action opening case delays the filing of the cistern while the flush valve is open
- Adjustable water level
(Twin screw / adjustment in one movement)
- **Quiet**
- **Anti-backflow function**
- **Flow rate:** 0.14 l/s at 3 bars
- **Pressure function range:** from 0.5 to 16 bars
- Available in low pressure with a filter
- Refill function as an option

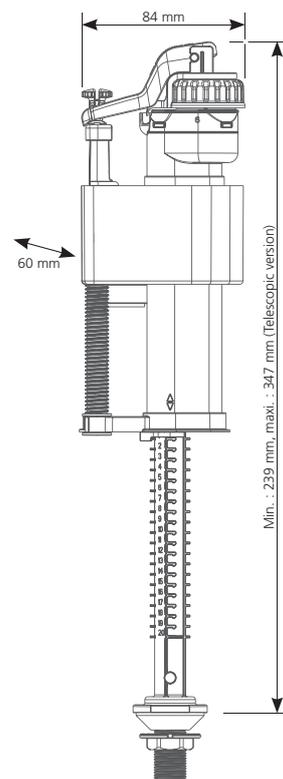

AVAILABLE IN
1/2" AND 3/8"
BRASS



AVAILABLE IN 1/2", 3/8"
AND 15/16" PLASTIC

*Based upon a 4-people-family consumption when replacing a standard inlet valve