




COMPACT 100/110

Hydraulic



- **Compact**
- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- The **case** allows the closing of the valve at a constant level
- **Hydraulic closure** (no water hammer shock)
- Adjustable water level
- **Quiet**
- **Anti-backflow function**
- **Pressure function range:** 0.1 to 16 bars
- Compact 100 :
 - Low pressure:
 - 0.1 to 5 bars
 - flow rate : 0.25l/s at 3 bars
- Compact 110:
 - High pressure:
 - 0.5 to 16 bars
 - flow rate : 0.15l/s at 3 bars
- **Twin screw** / adjustment in one movement

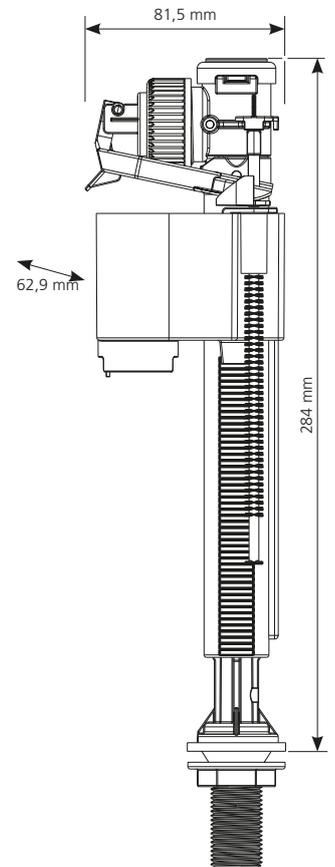

* 1/2 plastic version