





COMPACT 100/110 OD

Hydraulic



FEATURES

- **Compact**
 - To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
 - Delaying case : enables to **save water**, up to 5l per day *
 - Twin screw for adjustable water level
- **Silent**
- **Anti-backflow function**
- **Pressure function range:** 0.1 to 16 bars
- Compact 100 :
 - Low pressure: 0.1 to 5 bars
 - flow rate : 0.25l/s at 3 bars
- Compact 110:
 - High pressure: 0.5 to 16 bars
 - flow rate : 0.15l/s at 3 bars

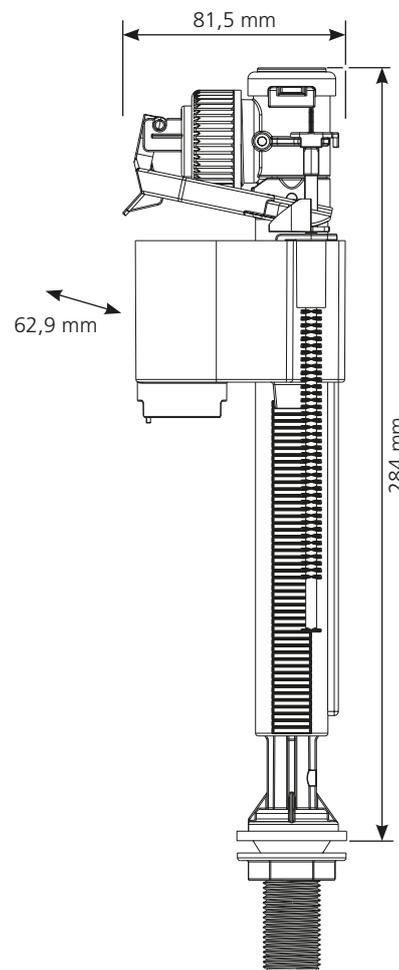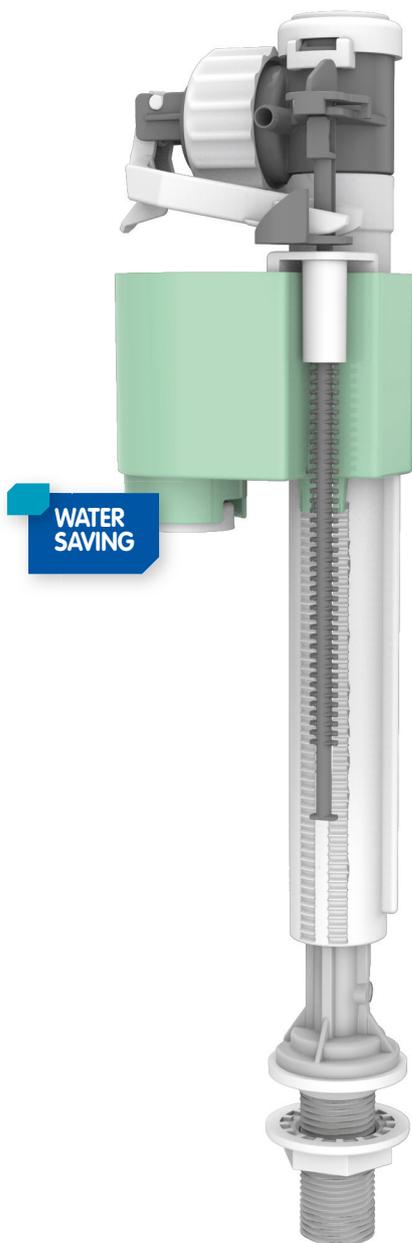

*Based upon a 4-people-family consumption when replacing a standard inlet valve