



COMPACT 100 OD

Hydraulic



• **Compact**

- To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- Delaying case : enables to **save water**, up to 5l per day *
- Twin screw for adjustable water level


• **Silent**

• **Anti-backflow function**

• **Refill function:** tube + reducers set

• **Pressure function range:** 0.2 to 16 bars

- Low pressure:
 - 0.2 to 5 bars
 - flow rate : 0.25l/s at 3 bars
- High pressure:
 - 0.5 to 16 bars
 - flow rate : 0.15l/s at 3 bars

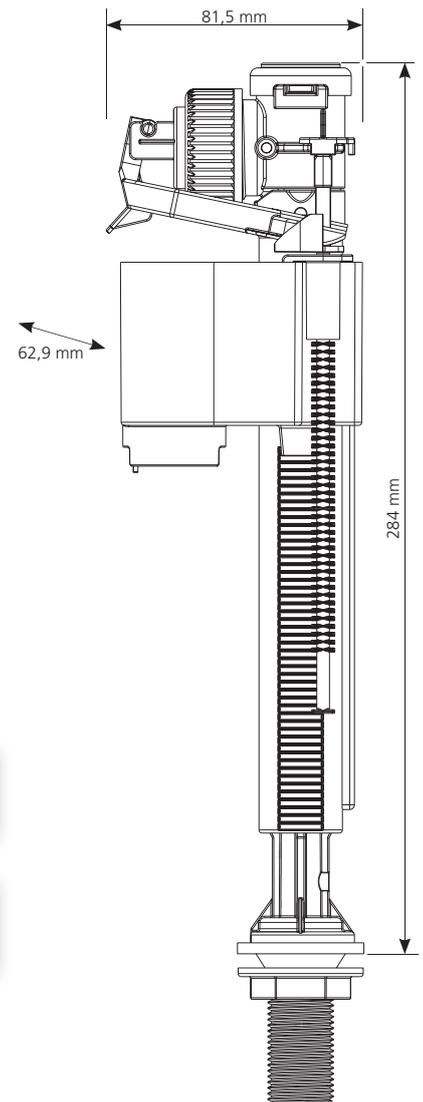

AVAILABLE IN
1/2" AND 3/8"
BRASS



AVAILABLE IN
1/2" PLASTIC

*Based upon a 4-people-family consumption when replacing a standard inlet valve