





AQUASTOP - Antileak fill valve

Lateral inlet valve hydraulic closure

NEW

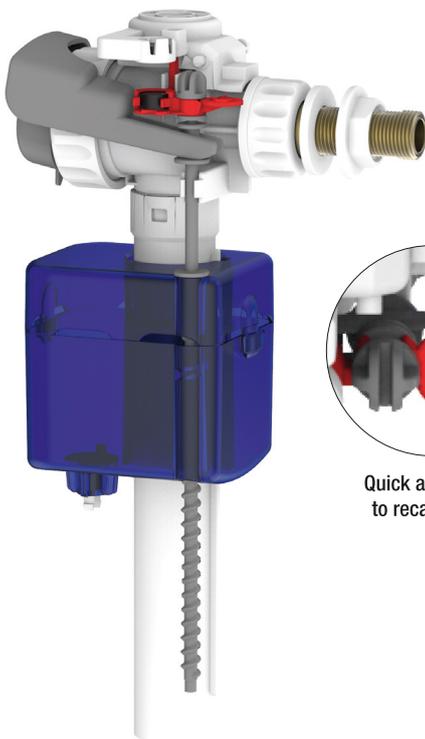

Quick and easy
to recalibrate



Aquastop detects and isolates itself to stop the leak

Ultra quiet : 11dB only

USE

From drop to drop to continuous trickle, AquaStop detects and isolates itself to stop the leak. The empty cistern warns the user that the flush valve is leaking. To fill the cistern again, it is necessary to recalibrate the fill valve. The user may begin the maintenance or replace the flush valve.

FEATURES

- Hydraulic closure
- Brass insert 3/8
- Pressure range : 0.5 to 12 bars
- Setting range : 90mm
- Flow rate (at 3 bars) : 7.2l/min

