


OD 99B



WRAS

DESCRIPTION

- ▶ OD 99B saves water by delaying cistern filling while flush valve is opened
- ▶ Compact
- ▶ To be installed into ceramic or plastic, recessed or at sight cisterns, for replacement or as original equipment
- ▶ Hydraulic closure (no water hammer shock)
- ▶ Adjustable water level
- ▶ Silent
- ▶ Anti-backflow function
- ▶ Filter can be reached without disconnecting from water supply
- ▶ 1/2th plastic end-fitting (also available in 3/8th)
- ▶ Flow rate: 0,14 l/s at 3 bars
- ▶ Pressure function range: from 0,5 to 16 bars

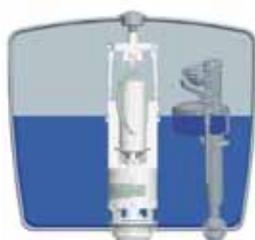

CLOSED
FLOAT VALVE

How it works?



Large flush



Cistern is emptied faster than the delaying case, while float valve is always closed.

Once flush valve has delivered required water volume, flush valve is closed again, delaying case keeps on emptying itself, according to communicating vases principle, and float valve opens to fill the cistern.

Small flush

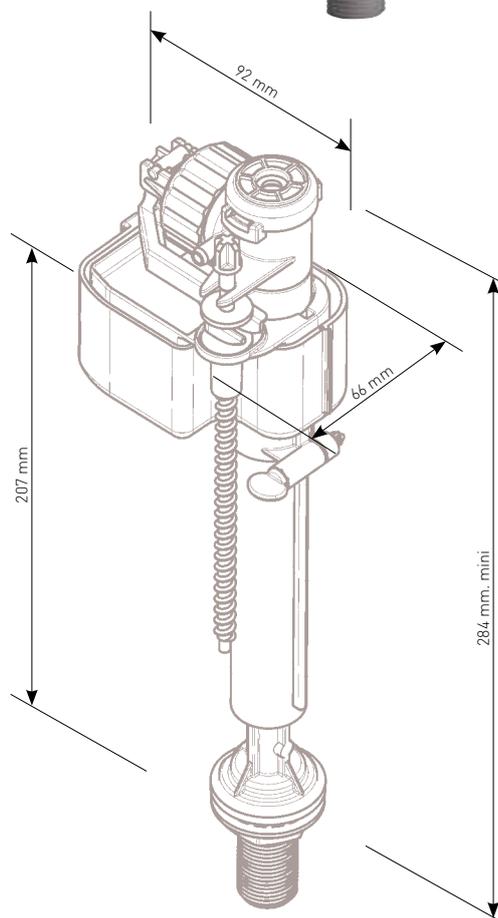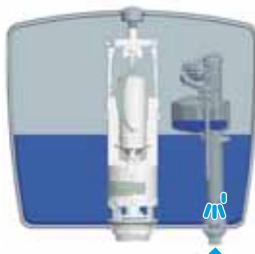

	Packing	Packing			Palette Quantity
		Nb	M ³	Kg	
OD 99B	Plastic bag	12			1