

CONTROL PANELS

Dual flush

YING YANG			
	White	BRIGHT / mat chrome-plated	MAT / bright chrome-plated
LEMON			
	White	BRIGHT / mat chrome-plated	MAT / bright chrome-plated
MOON			
	White	BRIGHT / mat chrome-plated	MAT / bright chrome-plated
MEDIA			
	White	BRIGHT / mat chrome-plated	MAT / bright chrome-plated




Single flush

White	Mat chrome-plated	Inviolable stainless steel

STANDARDS

NF • **DIN** • **TIN** • **kiwa**

10
YEAR
GUARANTEE

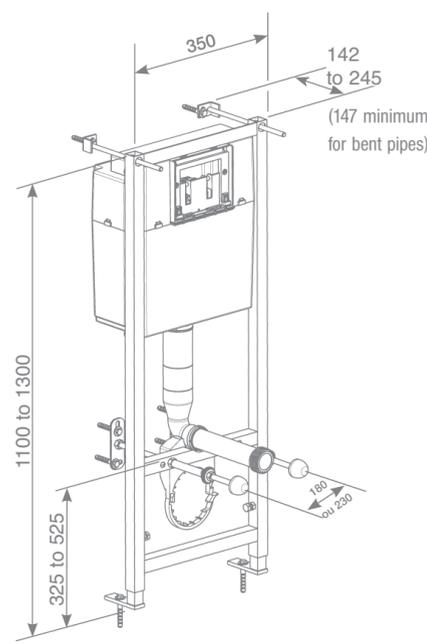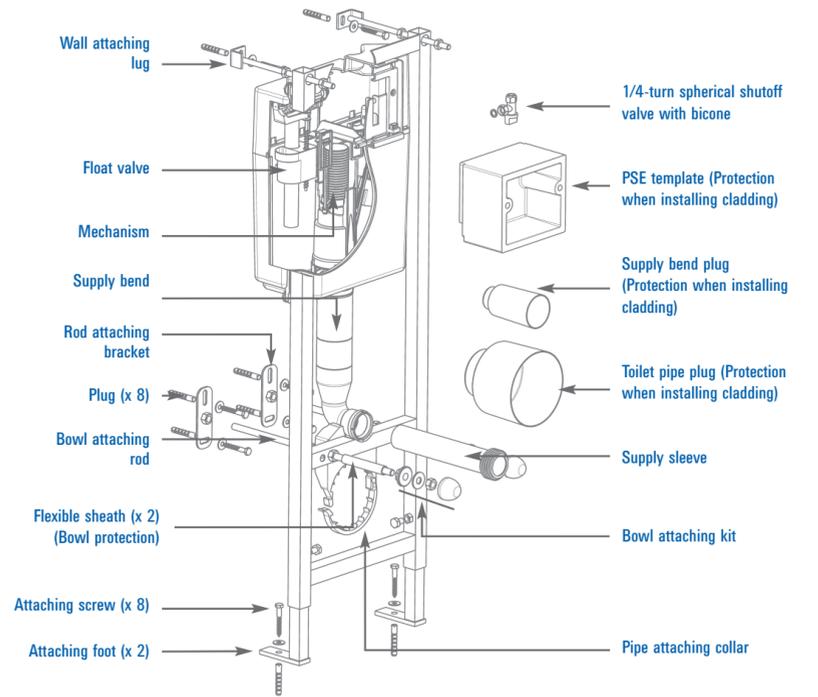

SIAMP Siège social : 4, quai Antoine 1^{er} - B.P. 219 - M.C. 98007 MONACO Cedex
 Tel. 00 (377) 93 15 53 75 - Fax : 00 (377) 92 05 71 04 • www.siamp.com - e-mail : contact@siamp.com

SIAMP
Monaco



WERSO BCM 350

UERSO BCM 350



Structure

Designed for attachment to the floor (2 points) and wall (6 points), allows the installation of a suspended toilet bowl secured to a supporting wall.

Made of steel tubes (30 x 30 x 1.5 mm) connected by electro-welding and coated with epoxy paint guaranteed for 25 years to protect against corrosion (600 hours of resistance to salt spray).

It conforms to Standard NF (tested at 400 kg).



Feet and adjustments

The feet consist of a large bichromate steel plate (100 x 30 x 8 mm) and two electro-welded bichromate steel tubes (25 x 25 x 3 mm).

They slide inside the structure for adjusting the frame height by 200 mm.

This adjustment range means that the bowl can be placed at between 325 and 525 mm, especially when the installation is intended for disabled people



Attachments

The feet are attached to the structure by 2 setscrews allowing adjustment to within the millimeter by simple tightening.

Attachment to the floor and at wall is by eight plugs and screws of top quality.

Attachment of the bowl is by two 12 mm threaded rods and 2 wall brackets made integral with the structure



Cistern

The cistern is of high impact polystyrene (offering high resistance to thermal variations and aging) with a maximum capacity of 6 liters.



It features internal insulation (PSE monoblock shell) to prevent condensation and to increase the sound insulation of the installation.

Each cistern is tested individually in the works.



Cistern equipment

Consisting of a dual flush mechanism and a silent float valve, both derived from the SIAMP standard range.

These products are NF and have therefore gone through the 200,000 maneuvers test. The equipment was chosen by the biggest ceramic producers in the world for their own equipment.

Cistern water connection

Connection is directly inside the cistern to prevent any risk of leakage on the outside.



The supply can use any type of pipe (copper, reticulated, PVC, flexible, etc.), and the shutoff valve has a bicone attachment.



Cistern supply

The bend is of PEHD to guarantee strength.

Tightness is provided by two O-rings on the outlet from the cistern and on the supply sleeve, on the bend side by a lip seal and on the bowl side by a multi-lip seal.

Bowl drain

The drain kit consists of a sleeve and a bent pipe. Constructed of PVC, the pipe is connected to the main pipe by bonding.



The tightness between the pipe and the sleeve and the bowl is made by EPDM seals that are easily replaced if necessary. The attachment of the pipe to the frame is simplified by a clip-on collar.



NB: As an option, a straight drain kit is available



Maintenance

Depending on the hardness of the network water, it may be necessary to clean or change the membrane seals of the cistern equipment.



The control plate is used as an access trap and the cistern equipment is directly accessible and easy to remove from the cistern.