




## CONCEALED CISTERN

### BCM 6030 WALL MOUNTED VERSION



#### DESCRIPTION

- ▶ For installing wall hung standard, extended or compact pan
- ▶ Wall mounting frame bearing a 400kg load
- ▶ Steel tubes structure, 30x30x1,5mm, electro-welded and anti-corrosion treated, epoxy painted
- ▶ Feet are made from one bichromated steel plate (80x30x4mm) and one electro-welded bichromated steel tube (25x25x2mm), fixed to the floor by 2 plugs and 2 bichromated screw plugs
- ▶ Pan wall fixing thanks to 2 brackets held by 4 plugs and 4 bichromated screw plugs
- ▶ Fixed to the wall using 2 brackets, held in place by 2 plugs and 2 bichromated screw plugs.
- ▶ 6l. insulated cistern, from which components can be withdrawn through command plate window
- ▶ Double flush outlet valve, 3l./6l. factory preset. Adjustable at 2.3l./4l..
- ▶ Adjustable inlet valve, 6l. factory preset, can be chosen between:
  - Hydraulic Compact 95L
  - Hyper silent hydraulic QUIETO 77L
  - Dirty water mechanical Handy 93L
- ▶ Mechanical double flush front commands
- ▶ Network water connection can be made on the inside or on the outside of the cistern. Stop cock section is 1/2" M
- ▶ 90° bent drainage pipe. Made from PE or PVC. Diameter for connection to building drainage system is adjustable at 100 or 110 mm. Bent pipe is fixed on the frame by simply clipping it
- ▶ Pan connection set:
  - Drain straight pipe for connecting pan to bent pipe is made from PVC. Diameter is 100 mm
  - Supply straight pipe for connecting cistern to pan
  - Pan fixing accessories
- ▶ Cladding reservation and protection accessories
- ▶ Can be equipped with **SPIN-AIR<sup>WC</sup>** WC odour extractor system

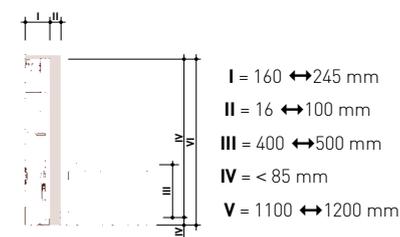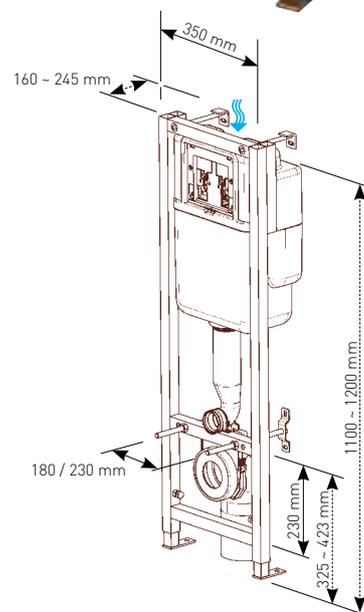

	Packing	Packing			Pallet quantity
		Nb	M <sup>3</sup>	Kg	
BCM 6030	Carton	1	0,07	15,82	20