



INGENIO SELF-SUPPORTING QUIETO OD version

ULTRA QUIET

Wall frame with flush plate



NF
9 dB



- 100% NF SELF-SUPPORTING (wall fixing not necessary)
- Accuracy of installation : EASY and QUICK
- An assortment of **INNOSIAMP** for an INTUITVE installation
- The QUIETEST inlet valve on the market

USE



- ✓ For installing a wall hung-standard, extended or compact WC
- ✓ Design for floor or wall installation
- ✓ Self-supporting wall frame **bearing a 400 kg load**
- ✓ Dual flush front flush plate
- ✓ Easy maintenance **with no tools**
- ✓ Optimal working conditions

FEATURES

Self-supporting structure **NF**

- Compact and resistant 45 x 45 mm steel tube
- Anti-corrosion treated
- Feet with oblong fixing holes to allow the lateral adjustment of the frame position.
- Feet delivered in the installation position**
- **Self-braking system** : easy height adjustment by a single person
- **Built-in bull's eye spirit level** for instant level assessment **INNOSIAMP**
- **Quick fixing** threaded rods, allows for adjustment after cladding completion
- Supplied with quick fixing wall brackets (installation optional)

Flushing cistern **NF**


- Dual flush outlet valve, factory preset for 6/3 litre flushing
- **Ultra quiet water saving delayed action** inlet valve QUIETO OD **NF**
- Insulated cistern to prevent condensation
- Rigid templates supplied to **protect the connections** during the construction phase
- Direct access for maintenance through the flush plate window
- Supplied with an additional outlet valve seal and membrane

**SELF-BRAKING
HEIGHT
ADJUSTMENT**

INGENIO SELF-SUPPORTING QUIETO OD version

Wall frame with flush plate

EXTRA SLIM AND MODERN DESIGN

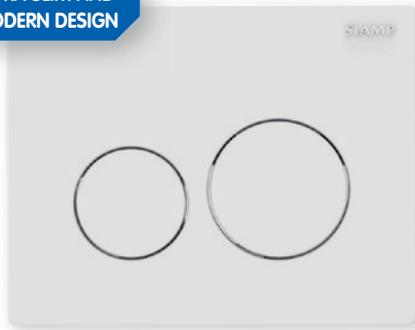

White flush plate SPHERE

Flush plate **NF**

- Dual flush front flush plate with mechanical actuation
- **Quick and intuitive** lock of the flush plate
- Easy adjustment system for adapting the length to cladding
- White flush plate SPHERE

Water connection

- Ultra quiet : **straight stopcock **NF**** with built-in hose **INNO SIAMP**
- 1/2" brass isolating valve, **accessible from the outside of the cistern**
- Right connection factory preinstalled, possible left connection

Cladding

- Rigid template in the flush plate zone: ensures the support of the flush plate, delimits the cladding and its thickness
- Rigid template in the bowl connection zone **INNO SIAMP**
- Rigid templates to protect during the construction phase **INNO SIAMP**

Accessories

- 90° outlet bend, Ø100 mm, made from HDPE, to be glued
- Toilet bowl connection set with drainage and supply sleeves and quick fixing threaded rods (**one unique single piece**) **INNO SIAMP**

TEXT FOR TENDERS :

INGENIO SELF-SUPPORTING WITH FLUSH PLATE / QUIETO OD - BEND DRAINAGE **NF**

Ref.: 31 3160 10

Wall frame for WC wall hung solution, 10-year guarantee. For floor or wall installation.

For installing a wall hung-standard or extended WC.

Resistant NF structure bearing a 400 kg load, steel tubes 45x45x1.5 mm, anti-corrosion treated.


Adjustable height from 1100 to 1300 mm, width 350 mm, depth 147 mm.

Insulated cistern, factory preset flush at 6/3 litres, equipped with a dual flush outlet valve and a ultra quiet water saving delayed action NF inlet valve.

Right or left water connection. Straight stopcock with a ultra quiet built-in hose, NF certified.

Supplied with fixing and protection accessories, 90° outlet bend made from HDPE, dual flush plate and toilet bowl connection set.

	Ref.	Barcode	Packing	Packing		Pallet quantity
				Nb	L. x d. x h. (mm)	
INGENIO SELF-SUPPORTING WITH FLUSH PLATE Quieto OD - Bend drainage	31 3160 10	3 24723 010543 4	Carton	1	1140 x 395 x 185	20

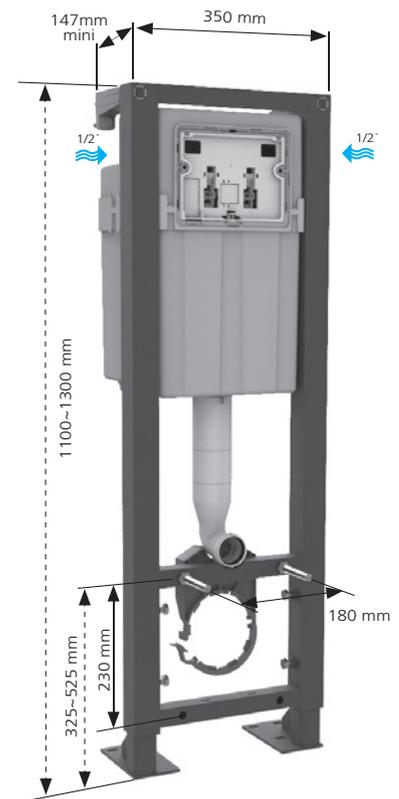

- 1 = 147 mini ~ 240 mm max
- 2 = 13/20** ~ 80 mm
- 4 = 0 ~ 200 mm
- if 3 = 400 => 4 = 200 mm max*
- if 3 = 480 => 4 = 120 mm max*

*When the distance between the WC fixing axle and the WC seat is 75 mm

**According to flush plate