



## INGENIO WALL FIXINGS QUIETO OD version

Wall frame with flush plate

**ULTRA QUIET**



**Accuracy of installation : EASY and QUICK**

**An assortment of **INNOSIAMP** for an INTUITVE installation**

USE



- ✓ For installing a wall hung-standard, extended or compact WC
- ✓ Design for wall installation
- ✓ **Bearing a 400 kg load**
- ✓ Dual flush front flush plate
- ✓ Easy maintenance **with no tools**
- ✓ Optimal working conditions

### FEATURES

#### Wall fixing structure **NF**

- Compact and resistant 30 x 30 mm steel tube
- Anti-corrosion treated

#### Feet delivered in the installation position

- **Self-braking system** : easy height adjustment by a single person
- **Built-in bull's eye spirit level** for instant level assessment **INNOSIAMP**
- **Quick fixing** threaded rods, allows for adjustment after cladding completion


#### Flushing cistern **NF**

- Dual flush outlet valve, factory preset for 6/3 litre flushing
- **Ultra quiet water saving delayed action** inlet valve QUIETO OD **NF**
- Insulated cistern to prevent condensation
- Rigid templates supplied to **protect the connections** during the construction phase
- Direct access for maintenance through the flush plate window
- Supplied with an additional outlet valve seal and membrane

# INGENIO WALL FIXINGS QUIETO OD version

Wall frame with flush plate

EXTRA SLIM AND  
MODERN DESIGN

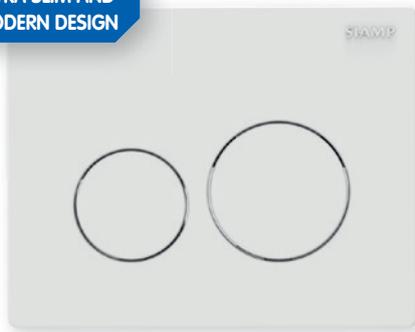

White flush plate  
SPHERE

## Flush plate **NF**

- Dual flush front flush plate with mechanical actuation
- **Quick and intuitive** lock of the flush plate
- Easy adjustment system for adapting the length to cladding
- White flush plate SPHERE

## Water connection

- Ultra quiet : **straight stopcock **NF**** with built-in hose **INNO SIAMP**
- 1/2" brass isolating valve, **accessible from the outside of the cistern**
- Right connection factory preinstalled, possible left connection

## Cladding

- Rigid template in the flush plate zone: ensures the support of the flush plate, delimits the cladding and its thickness
- Rigid template in the bowl connection zone **INNO SIAMP**
- Rigid templates to protect during the construction phase **INNO SIAMP**

## Accessories

- 90° outlet bend, Ø100 mm, made from HDPE, to be glued
- Toilet bowl connection set with drainage and supply sleeves and quick fixing threaded rods (**one unique single piece**) **INNO SIAMP**

## TEXT FOR TENDERS

### INGENIO WALL FIXINGS WITH FLUSH PLATE / QUIETO OD - BEND DRAINAGE **NF**

Ref.: 31 3260 10

Wall frame for WC wall hung solution, 10-year guarantee.

For wall installation.

For installing a wall hung-standard or extended WC.

Resistant NF structure bearing a 400 kg load, steel tubes 30x30x1.5 mm, anti-corrosion treated.


Adjustable height from 1100 to 1300 mm, width 350 mm, depth 147 mm.

Insulated cistern, factory preset flush at 6/3 litres, equipped with a dual flush outlet valve and a ultra quiet water saving delayed action NF inlet valve.

Right or left water connection. Straight stopcock with a ultra quiet built-in hose, NF certified.

Supplied with fixing and protection accessories, 90° outlet bend made from HDPE, dual flush plate and toilet bowl connection set.

	Ref.	Barcode	Packing	Packing		Pallet quantity
				Nb	L. x d. x h. (mm)	
INGENIO WALL FIXINGS WITH FLUSH PLATE Quieto OD - Bend drainage	31 3260 10	3 24723 010545 8	Carton	1	1140 x 395 x 185	20

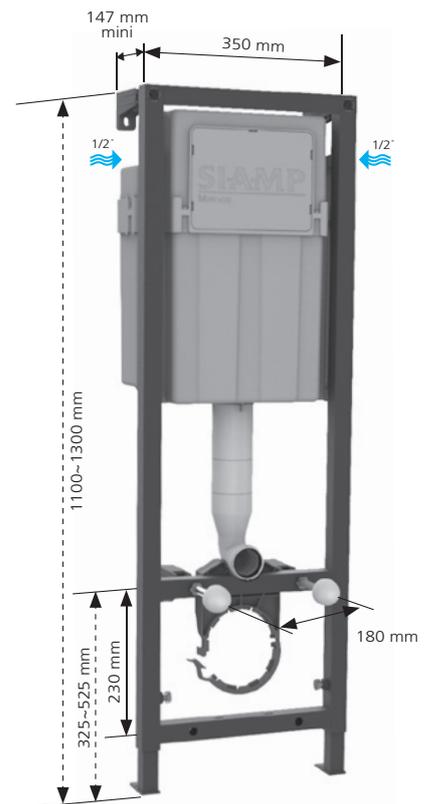

- 1 = 147 mini ~ 240 mm max
- 2 = 13 ~ 80 mm
- 4 = 0 ~ 200 mm
- if 3 = 400 => 4 = 200 mm max\*
- if 3 = 480 => 4 = 120 mm max\*

\*When the distance between the WC fixing axle and the WC seat is 75 mm