

Groupe

Pierre & Vacances
CenterParcs



INGENIO PVCP

Wall frame with flush plate



- Accuracy of installation : **EASY** and **QUICK**
- **100% SELF-SUPPORTING** (wall fixing not necessary)
- The **QUIETEST** inlet valve on the market : **NF 9 dB**



USE



- ✓ Design for floor or wall installation
- ✓ Self-supporting wall frame **bearing a 400 kg load**
- ✓ Dual flush front flush plate
- ✓ Easy maintenance **with no tools**
- ✓ Optimal working conditions

FEATURES

Self-supporting structure


- Anti-corrosion treated
- Compact and resistant 45 x 45 mm steel tube
- Feet with oblong fixing holes to allow the lateral adjustment of the frame position.
- **Feet delivered in the installation position**
- **Self-braking system** : easy height adjustment by a single person
- **Built-in bull's eye spirit level** for instant level assessment **INNOSTAMP**
- **Quick fixing** threaded rods, allows for adjustment after cladding completion
- Supplied with quick fixing wall brackets (installation optional)

Flushing cistern

- Dual flush outlet valve, factory preset for 6/3 litre flushing
- **Ultra quiet water saving delayed action** inlet valve QUIETO OD
- Insulated cistern to prevent condensation
- Rigid templates supplied to protect the connections during the construction phase
- Direct access for maintenance through the flush plate window
- Supplied with an additional outlet valve seal and membrane



**SELF-BRAKING
HEIGHT
ADJUSTMENT**

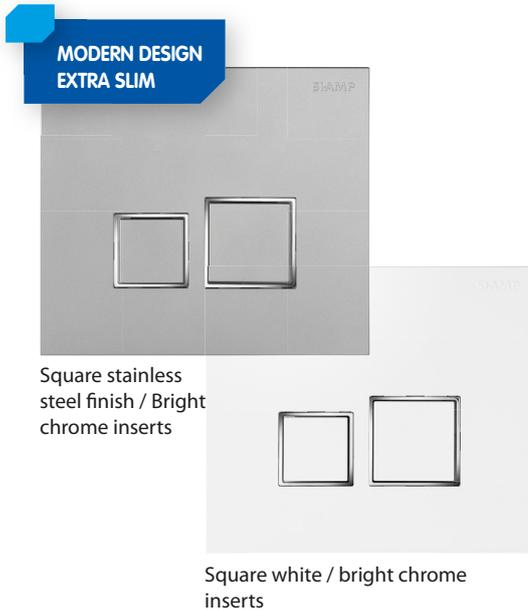

Connexion en eau

- Ultra quiet : **straight stopcock** with built-in hose **INNO SIAMP**
- **Secured system inside the cistern**
- 1/2" brass isolating valve, **accessible from the outside of the cistern**
- Right connection factory preinstalled, possible left connection

Flush plate

- Dual flush front flush plate with mechanical actuation
- **Quick and intuitive** lock of the flush plate
- Easy adjustment system for adapting the length to cladding
- Flush plate SQUARE white or stainless steel finish with bright chrome inserts

Cladding


- Rigid template in the flush plate zone: ensures the support of the flush plate, delimits the cladding and its thickness
- Rigid template in the bowl connection zone **INNO SIAMP**
- Rigid templates to protect during the construction phase **INNO SIAMP**

Accessories

- 90° outlet bend or straight pipe, Ø100 mm, made from HDPE, to be glued
- Toilet bowl connection set with drainage and supply sleeves and quick fixing threaded rods (one unique single piece) **INNO SIAMP**



- 1 = 147 mini ~ 240 mm maxi
 - 2 = 13/20** ~ 80 mm
 - 4 = 0 ~ 200 mm
 - si 3 = 400 => 4 = 200 mm max*
 - si 3 = 480 => 4 = 120 mm max*
- *When the distance between the WC fixing axle and the WC seat is 75 mm
- **According to flush plate

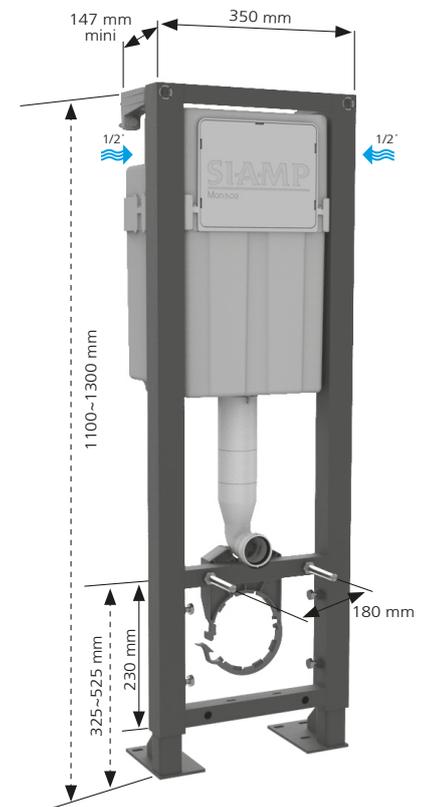

	Ref	Barcode	Packing	Nb	Packing L. x d. x h. (mm)	Pallet quantity
Wall frame Ingénio QUIETO OD bend drainage - flush plate Square white with chrome bright inserts	31 3110 11	3 24723 010457 4	Box	1	1140 x 395 x 185	20
Wall frame Ingénio QUIETO OD straight drainage - flush plate Square white with chrome bright inserts	31 3115 11	3 24723 010459 8	Box	1	1140 x 395 x 185	20
Wall frame Ingénio QUIETO OD bend drainage - flush plate Square stainless steel finish with bright chrome inserts	31 3110 12	3 24723 010458 1	Box	1	1140 x 395 x 185	20
Wall frame Ingénio QUIETO OD straight drainage - flush plate Square stainless steel finish with chrome bright inserts	31 3115 12	3 24723 010460 4	Box	1	1140 x 395 x 185	20