

FIXING INSTRUCTIONS

STORM 33A

IMPORTANT

Before starting work please...

- Read carefully these instructions.
- Remove all protection from pottery and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- Check all parts against the parts list.
- Prepare a firm working surface (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to prevent scratching the glazed faces of the cistern.




WARNING

Alterations to these cistern fittings may infringe water regulations and will invalidate our Guarantee


WRAS Approved Outlet Flush Valve STORM 33
WC Suite UK Water Supply compliant

PARTS LIST

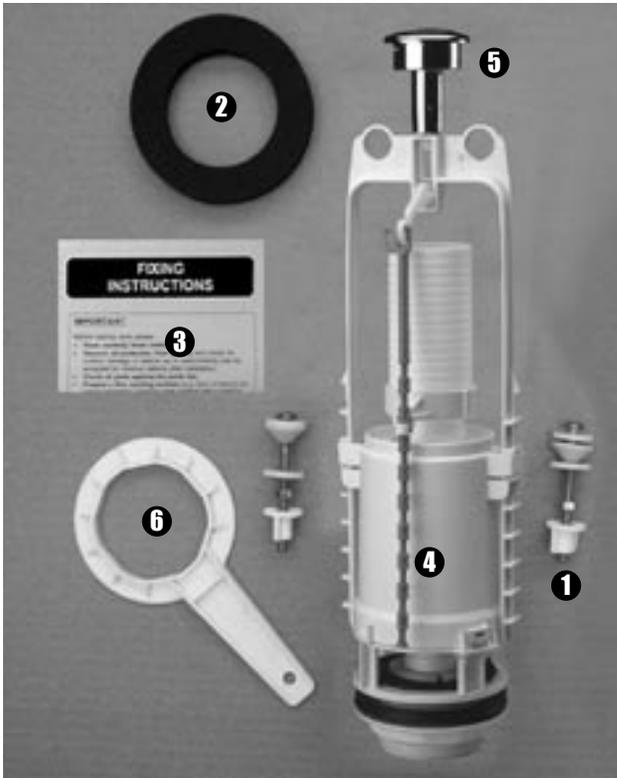


- ❶ 2 x Cistern fixings
- ❷ 1 x Sealing gasket
- ❸ 1 x Fixing instructions
- ❹ 1 x Outlet valve
- ❺ 1 x Button
- ❻ 1 x Spanner

ASSEMBLING THE CISTERN

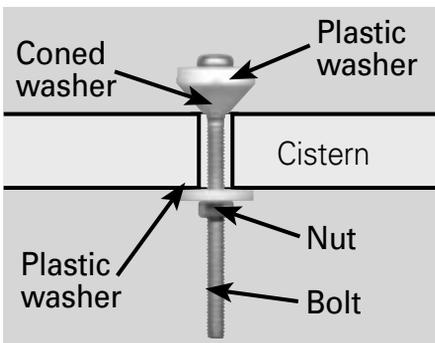


- ❶ Assemble fixing bolts to cistern as shown

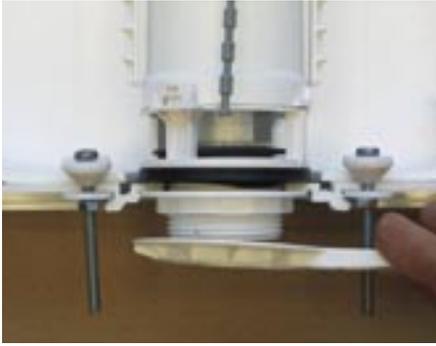

- ② Assemble outlet valve with washer on the inside of cistern and secure with locking nut



- ③ Place gasket onto outlet valve

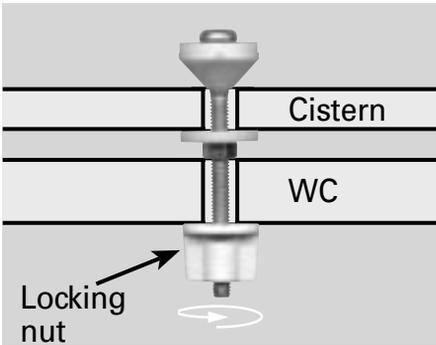

- ④ Secure cistern to WC with locking nuts




- ⑤ Assemble push button as shown

SERVICING THE VALVE



Remove valve from cistern as shown



Remove clip and replace the washer

CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with soft damp cloth. DO NOT use scouring powder or abrasive cloths or scourers.

Due to continuing product development we reserve the right to update and amend technical details without prior notice.

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04

E-mail: contact@siamp.com

kiwa
approved
product



UK WATER SUPPLY
REGULATIONS