


Monaco



SINGLE FLUSH VALVE ***STORM*** **33A** **BOTTOM INLET VALVE** ***COMPACT*** **99B**

ASSEMBLY INSTRUCTIONS

DESCRIPTION

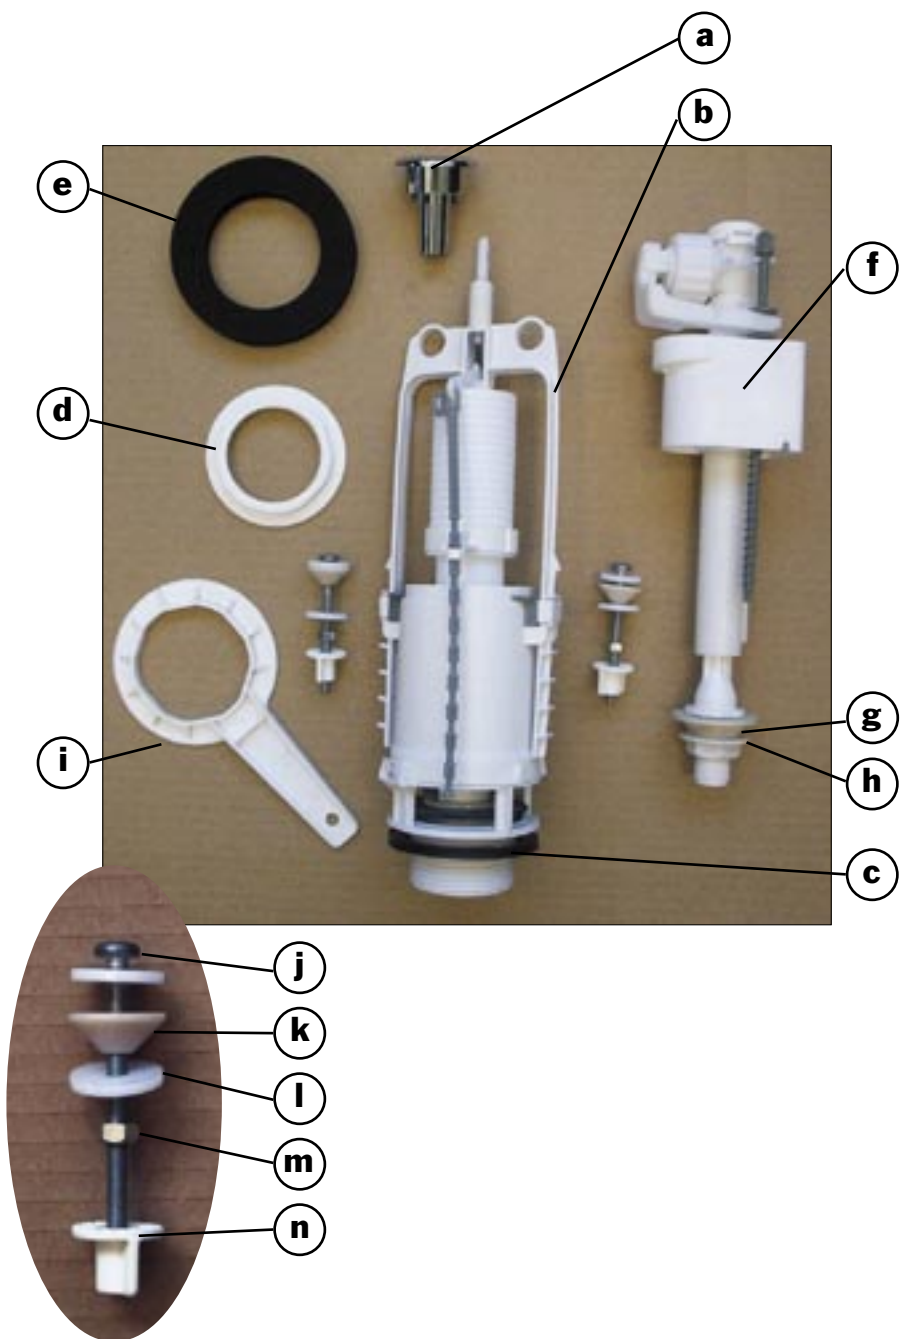

PARTS SUPPLIED

- | | |
|-----------------------|-----|
| Ⓐ Pushbutton | (1) |
| Ⓑ Valve body | (1) |
| Ⓒ Rubber Washer | (1) |
| Ⓓ Fixing nut | (1) |
| Ⓔ Sealing Gasket | (1) |
| Ⓕ Inlet valve | (1) |
| Ⓖ Inlet Rubber Washer | (1) |
| Ⓗ Backnut | (1) |

FITTINGS SUPPLIED

- | | |
|------------------|-----|
| Ⓘ Spanner | (1) |
| Ⓙ Bolt | (2) |
| Ⓚ Sealing washer | (2) |
| Ⓛ Washer | (4) |
| Ⓜ Nut | (2) |
| Ⓝ Butterfly nut | (2) |

Tools required (not supplied):

- Slotted screwdriver and adjustable spanner.

Advice:

• Before you Start

- Read these instructions carefully.
- Check the pack and make sure you have all the parts on the pack list.
- Remove all packaging from pottery and check for surface damage or defects.
- Prepare a firm working surface (e.g; floor or bench) for cistern assembly, covering work surface with cloth to prevent scratching the glazed faces of the cistern.

• Care & Use

- Wipe clean with a soft damp cloth around the WC suite.
- Never use scourers or abrasives.


I - ASSEMBLING THE INLET VALVE

- 1 Place Inlet valve (F) through Inlet hole with inlet Rubber Washer (G) inside the cistern.
- 2 Secure with backnut (H) but ensure float moves freely up and down valve body.
- 3 Slide bolt (J) through washer (K) and sealing washer (L) then place through cistern and secure with washer (K) and nut (M) using adjustable spanner.




II - ASSEMBLING THE OUTLET VALVE

- 1 Assemble the valve body (B) through cistern with rubber washer (C) on inside of the cistern.
- 2 Secure Fixing nut (D) with the spanner (I).

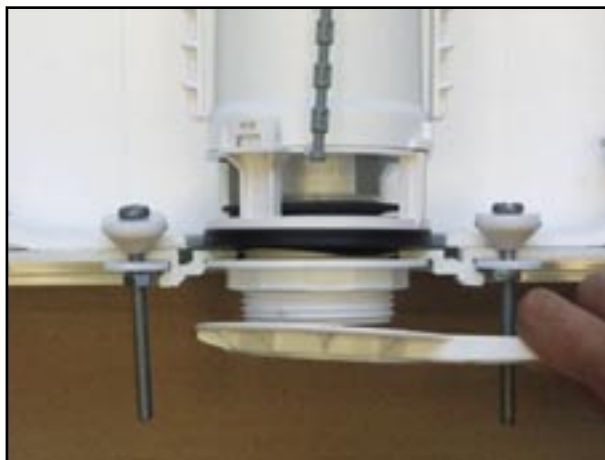

III - ASSEMBLING CISTERN TO PAN

- 1 Slide sealing gasket (E) over fixing nut
- 2 Slide cistern onto W.C. backplate by locating screws through W.C.
- 3 Secure using butterfly nut (N).

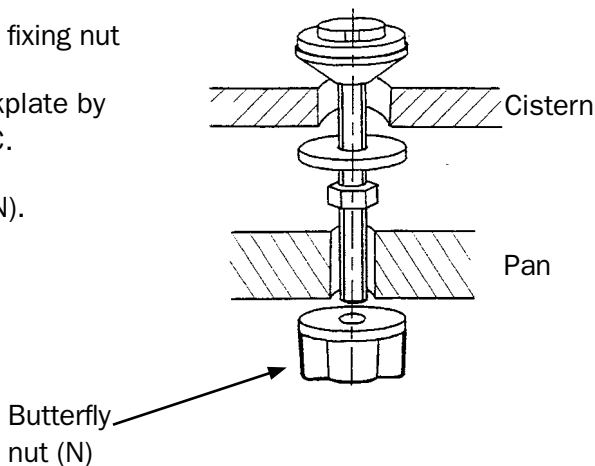


IV - ADJUSTMENT OF VALVE HEIGHT

Try the lid on the cistern to see if the valve is too high or too low :

To adjust :

- 1 Remove clips (x2) (1)
- 2 Unclip rod (2)
- 3 Adjust to correct height
- 4 Replace clips (x2) (1)
- 5 Push down at point (3) and clip rod in at (2).

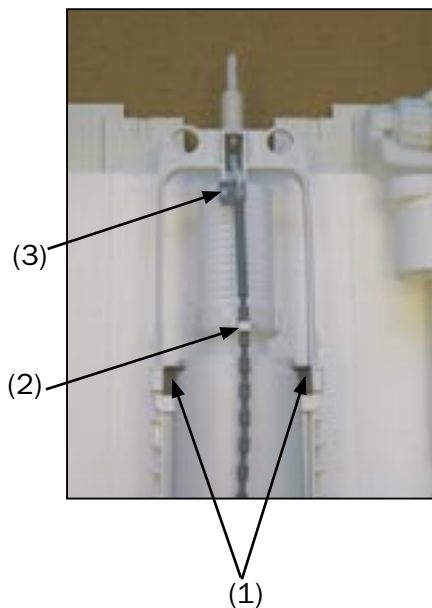

V - SETTING WATER LEVEL

- ① Connect the supply to the inlet valve.
- ② Allow cistern to fill and by screwing the grey bolt slide the float to set water level to waterline.
- ③ Ensure movement of float is not restricted.



VI - ASSEMBLING THE BUTTON

- ① Screw the button down, without pushing the central part.




THE FINISHED ASSEMBLY INSIDE THE CISTERN



MAINTENANCE

Servicing the valve

- ① To access the valve, unscrew the assembly as shown.

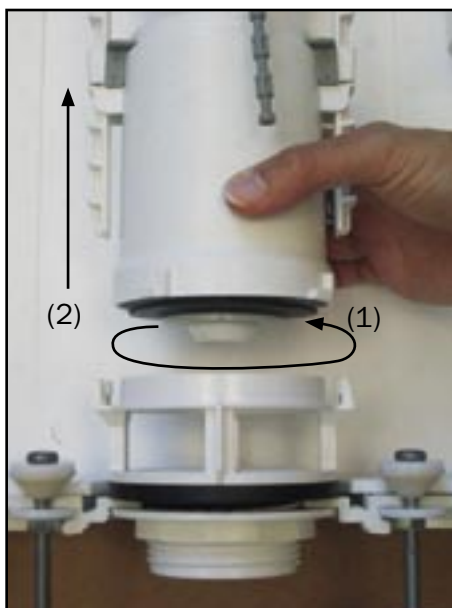

**For further enquiries
Contact Customer Services Mark2 on 01204 360 710**

SINGLE FLUSH VALVE *STORM* 33A

BOTTOM INLET VALVE *COMPACT* 99B



kiwa
approved
product



UK WATER SUPPLY
REGULATIONS

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04

E-mail: contact@siamp.com

Site Internet : [http:// www.siamp.com](http://www.siamp.com)