

FIXING INSTRUCTIONS

CAMBRIDGE / TEMPO

IMPORTANT

Before starting work please...

- **Read carefully these instructions.**
- **Remove all protection from pottery** and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- **Check all parts against the parts list.**
- **Prepare a firm working surface** (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to **prevent scratching the glazed faces of the cistern.**


TO THE INSTALLER

Please leave this instruction for the consumer

WARNING


**Alterations to these cistern fittings
may infringe water regulations and will
invalidate our Guarantee**

PARTS LIST

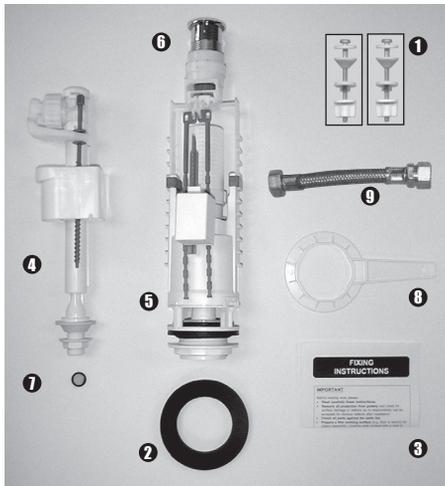


- ❶ 2 x Cistern fixings
- ❷ 1 x Sealing gasket
- ❸ 1 x Fixing instructions
- ❹ 1 x Inlet valve
- ❺ 1 x Outlet valve
- ❻ 1 x Button
- ❼ 1 x Filter (inlet)
- ❽ 1 x Spanner
- ❾ 1 x Flexi hose

ASSEMBLING THE CISTERN



- ❶ Assemble fixing bolts to cistern as shown




- ❷ Assemble outlet valve with washer on the inside of cistern and secure with locking nut
 NB : Manually screw the flush valve nut until it is in contact with the ceramic. If necessary give an extra quarter turn (maximum) with the appropriate spanner.
 Excessive tightening can damage the mechanism and would not be covered by the guarantee.




- ❸ Assemble inlet valve with washer on the inside of cistern and secure with backnut, check float moves freely
 NB : Manually screw the backnut until it is in contact with the ceramic. If necessary give an extra quarter turn (maximum).
 Excessive tightening can damage the mechanism and would not be covered by the guarantee.



④ Place gasket onto outlet valve



Secure cistern to WC with locking nuts




⑥ Connect water supply to inlet valve
N.B. : Make connecting tightness with filter seal.


WARNINGS:

- 1 - Do not overtight in any case.
- 2 - Do not use any sealing paste and/or compound in any case
- 3 - Do not use connector handling the internal part of the inlet valve.

SIAMP will be not responsible in case these warnings are not respected.




⑦ Adjust inlet valve float with screw 'A' to set water line



6L waterline mark

⑧ Check float position for dual flush valve

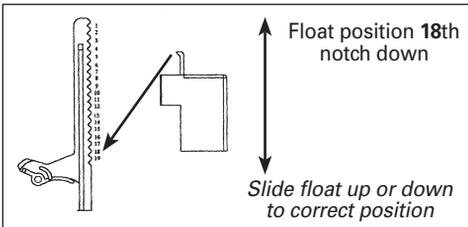


⑨ Assemble push button as shown

SERVICING THE VALVE



Remove valve from cistern as shown



Remove clip and replace the washer

CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with soft damp cloth. **DO NOT** use scouring powder or abrasive cloths or scourers.

Due to continuing product development we reserve the right to update and amend technical details without prior notice.

CONSUMER GUARANTEE

We are proud of our products and guarantee them against faulty material or manufacture, provided they have been installed, cared for and used in accordance with our instructions.

Please contact us immediately for more information on 01270 410026

This guarantee applies to products installed in the United Kingdom and the Republic of Ireland only and does not affect your statutory rights.