



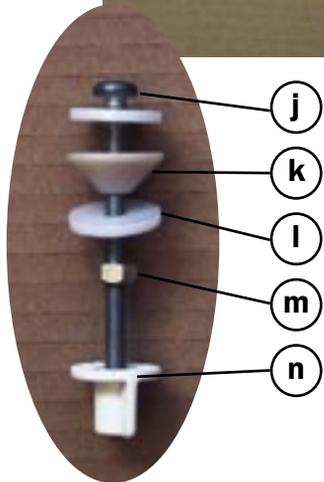

DESCRIPTION

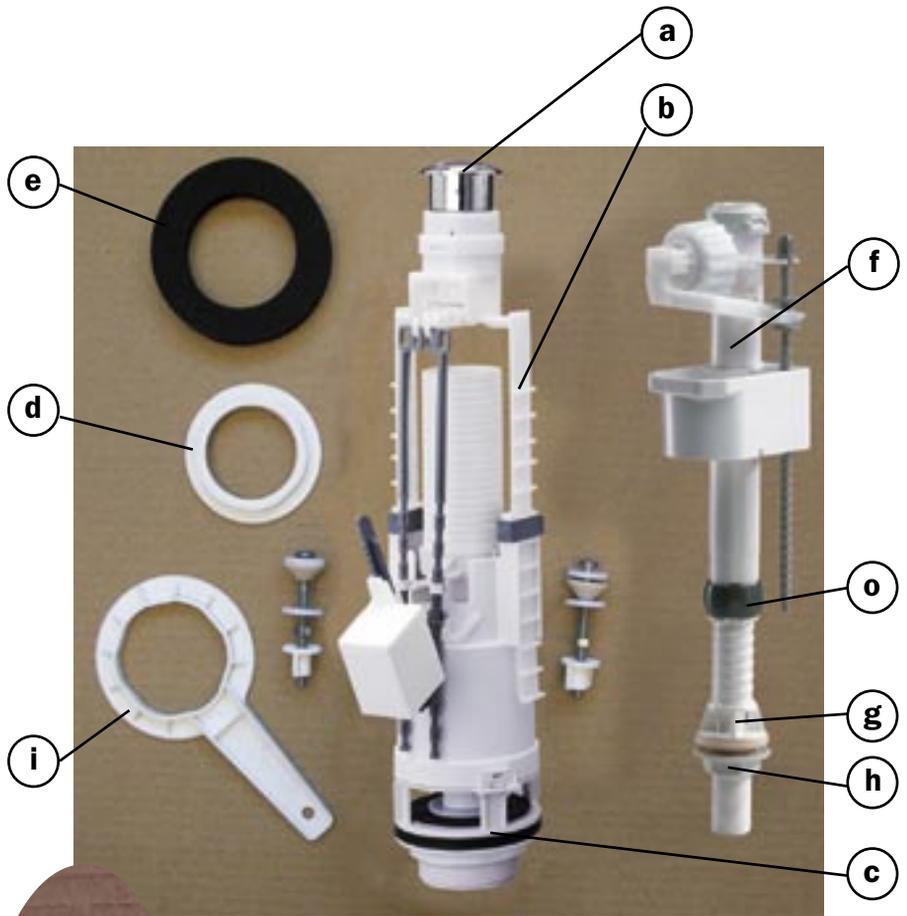

PARTS SUPPLIED

- Ⓐ Dual pushbutton (1)
- Ⓑ Valve body (1)
- Ⓒ Rubber Washer (1)
- Ⓓ Fixing nut (1)
- Ⓔ Sealing Gasket (1)
- Ⓕ Inlet valve (1)
- Ⓖ Inlet Rubber Washer (1)
- Ⓗ Backnut (1)
- ⓐ Blocking ring (1) *(for adjustment to the height of inlet valve)*

FITTINGS SUPPLIED

- ⓲ Spanner (1)
- ⓳ Bolt (2)
- ⓴ Sealing washer (2)
- ⓵ Washer (4)
- ⓶ Nut (2)
- ⓷ Butterfly nut (2)

Tools required (not supplied):

- Slotted screwdriver and adjustable spanner.

Advice:

• Before you Start

- Read these instructions carefully.
- Check the pack and make sure you have all the parts on the pack list.
- Remove all packaging from pottery and check for surface damage or defects.
- Prepare a firm working surface (e.g; floor or bench) for cistern assembly, covering work surface with cloth to prevent scratching the glazed faces of the cistern.

• Care & Use


- Wipe clean with a soft damp cloth around the WC suite.
- Never use scourers or abrasives.

• Water connection

- Water connection should be made only with an approved tap connector (not supplied). Preparatory sealing compounds should not be used.


I - ASSEMBLING THE INLET VALVE

- 1 Adjust height and place Inlet valve (F) through Inlet hole with inlet Rubber Washer (G) inside the cistern.
- 2 Secure with backnut (H) but ensure float moves freely up and down valve body.
- 3 Slide bolt (J) through washer (K) and sealing washer (L) then place through cistern and secure with washer (K) and nut (M) using adjustable spanner.

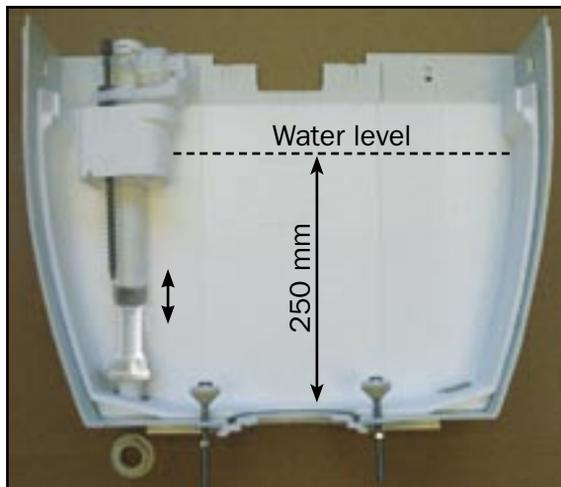

II - ASSEMBLING THE OUTLET VALVE

- 1 Assemble the valve body (B) through cistern with rubber washer (C) on inside of the cistern.
- 2 Secure Fixing nut (D) with the spanner (I).

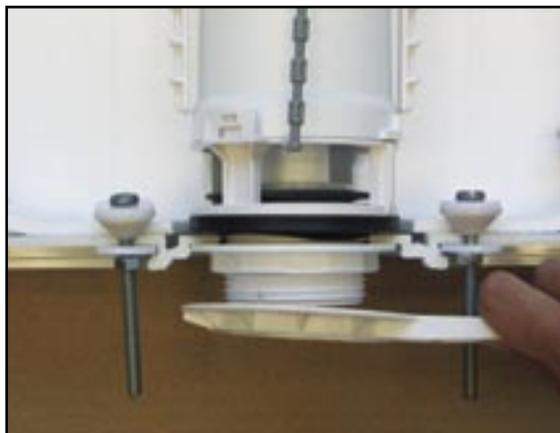


 **WARNING :** The small float must be positioned on opposite side from inlet valve



III - ASSEMBLING CISTERN TO PAN

- 1 Slide sealing gasket (E) over fixing nut
- 2 Slide cistern onto W.C. back-plate by locating screws through W.C.
- 3 Secure using butterfly nut by hand (N).

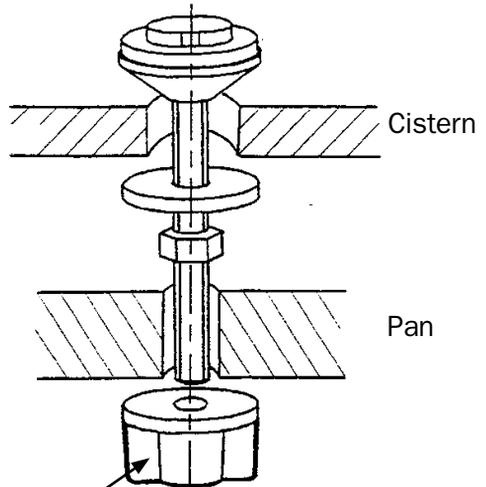


Butterfly
nut (N)

IV - SETTING WATER LEVEL

- 1 Connect the supply to the inlet valve.

WARNINGS:


- 1 - Do not over tighten.
 - 2 - Do not use any sealing paste and/or compound
 - 3 - No pipes or connections should be inserted into the valve tail.
- 2 Allow cistern to fill and by screwing the grey bolt slide the float to set water level to waterline.
 - 3 Ensure movement of float is not restricted.

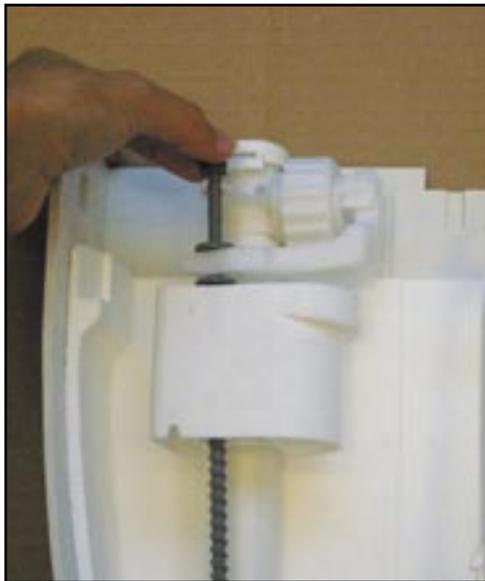

V - ASSEMBLING THE BUTTON

- 1 Put the lid on the cistern and screw the button down, without pushing the central part.

 **WARNING :** Wind tubular inner grey ring anti clockwise to its highest position

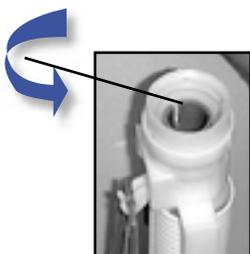


THE FINISHED ASSEMBLY INSIDE THE CISTERN



MAINTENANCE

Servicing the valve

- 1 To access the valve, unscrew the assembly as shown.

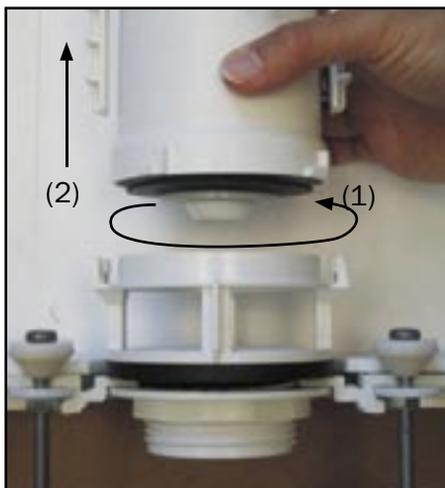

**For further enquiries
Contact Customer Services PJH on 0161 703 3360**

