

# VALVESETTING & SERVICING

INLETVALVE & FLUSHVALVE

 flushwise

**IMPORTANT** Before starting work please...

- **Read these instructions carefully**
- Please note the inlet valve will operate at 0.1 to 10 bar pressure. It is recommended a minimum of **0.25 bar** pressure to fill the cistern in 2 minutes.
- **Remove all protection from pottery** and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- **Check all parts against the parts list**
- **Prepare a firm working surface** (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to **prevent scratching the glazed faces** of the cistern.


## WARNING

**Alterations to these cistern fittings may infringe  
Water regulations & will invalidate our guarantee**

TO THE INSTALLER  
Please leave this instruction  
for the consumer

**Twyford**  
bathrooms

## FLUSHVALVE: SERVICING

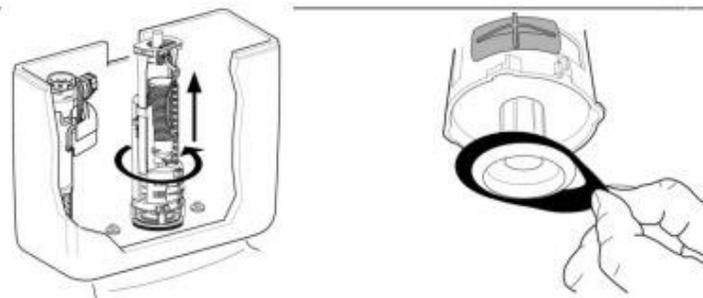

### **N.B. Turn off water supply before servicing**

Twist valve at base to remove from cistern connection.  
Remove the sealing washer and replace with new washer.

## CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with a soft damp cloth.  
DO NOT use scouring powder or abrasive cloths or scourers.

Due to continuing product development we reserve the right to update and amend  
technical details without prior notice

## CONSUMER GUARANTEE

We are proud of our products and guarantee them against faulty material or manufacture, provided they have been installed, cared for and used in accordance with our instructions.

**Please contact us for more information on 01270 410026**

This guarantee applies to products installed in the United Kingdom and the Republic of Ireland only and does not affect your statutory rights.

### TWYFORD BATHROOMS

LAWTON ROAD

t: +44 (0)1270 879777

ALSAGER

f: +44 (0)1270 873864

STOKE-ON-TRENT

web: [www.twyfordbathrooms.com](http://www.twyfordbathrooms.com)


### SANITEC GROUP

ST7 2DF

UK

# INLET VALVE


## SETTING THE WATER LEVEL:

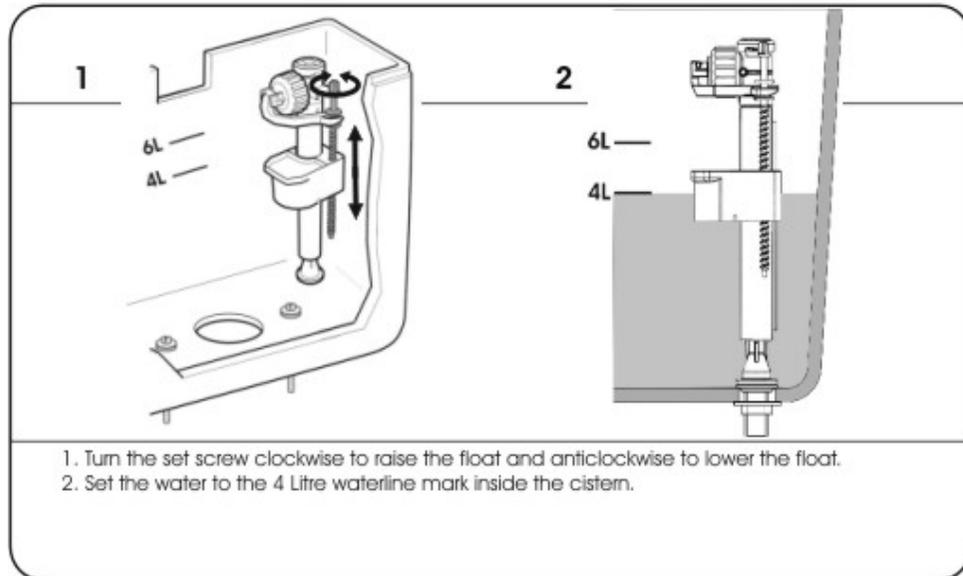

## SERVICING...

### THE FILTER

**N.B. Filter can be fitted Inline if required.**

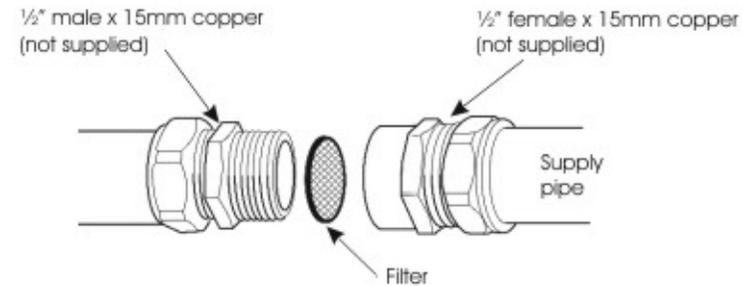


If your water supply is susceptible to dirt / grit it is recommended to install the filter to the supply pipe.

## SERVICING...

### THE DIAPHRAGM

**N.B. Turn off water supply before servicing**

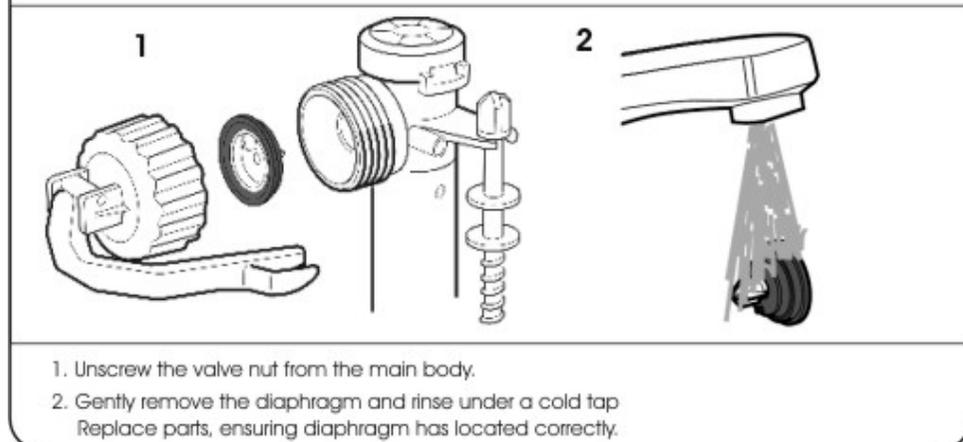

# FLUSH VALVE

**N.B. Turn off water supply before servicing**

