


# FLUSHVALVE: SERVICING

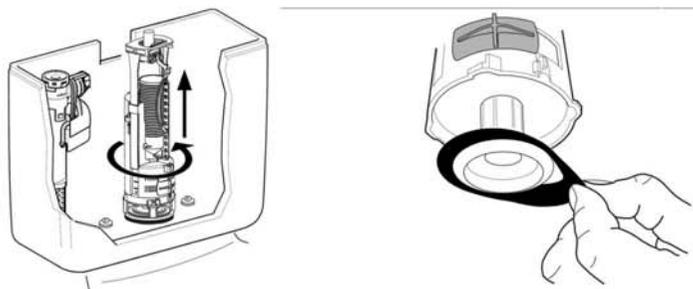

## N.B. Turn off water supply before servicing

Twist valve at base to remove from cistern connection.  
Remove the sealing washer and replace with new washer.

## CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with a soft damp cloth.  
DO NOT use scouring powder or abrasive cloths or scourers.

Due to continuing product development we reserve the right to update and amend technical details without prior notice

## CONSUMER GUARANTEE

We are proud of our products and guarantee them against faulty material or manufacture, provided they have been installed, cared for and used in accordance with our instructions.

**Please contact us for more information on 01270 410026**

This guarantee applies to products installed in the United Kingdom and the Republic of Ireland only and does not affect your statutory rights.

**TWYFORD BATHROOMS**

LAWTON ROAD

t: +44 (0)1270 879777

ALSAGER

f: +44 (0)1270 873864

STOKE-ON-TRENT

web: [www.twyfordbathrooms.com](http://www.twyfordbathrooms.com)

**SANITEC GROUP**

ST7 2DF UK

# VALVESETTING & SERVICING

## INLETVALVE & FLUSHVALVE

**IMPORTANT** Before starting work please...

- **Read these instructions carefully**
- Please note the inlet valve will operate at 0.1 to 10 bar pressure. It is recommended a minimum of **0.25 bar** pressure to fill the cistern in 2 minutes.
- **Remove all protection from pottery** and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- **Check all parts against the parts list**
- **Prepare a firm working surface** (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to **prevent scratching the glazed faces** of the cistern.

## WARNING

**Alterations to these cistern fittings may infringe  
Water regulations & will invalidate our guarantee**

## TO THE INSTALLER

Please leave this instruction  
for the consumer

**Twyford**

The Professionals Choice

# INLET VALVE


## SETTING THE WATER LEVEL:

1. Turn the set screw clockwise to raise the float and anticlockwise to lower the float.  
2. Set the water to the waterline mark inside the cistern.

## SERVICING...

### THE FILTER

**N.B. Filter can be fitted inline if required.**

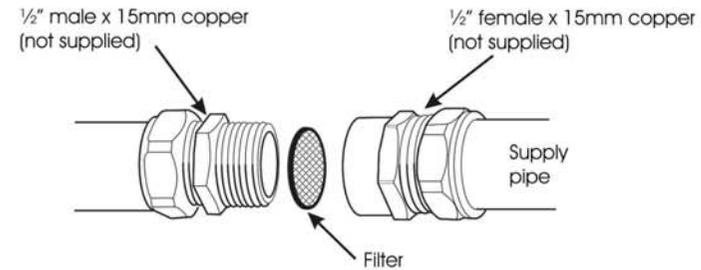


If your water supply is susceptible to dirt / grit it is recommended to install the filter to the supply pipe.

## SERVICING...


### THE DIAPHRAGM

**N.B. Turn off water supply before servicing**

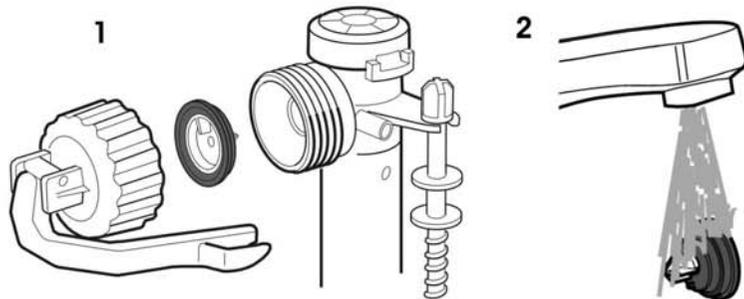

# FLUSH VALVE

**N.B. Turn off water supply before servicing**

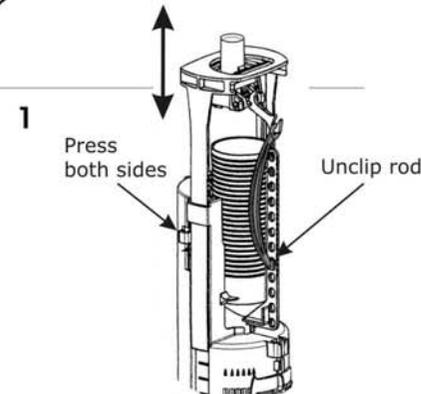

**2**

**Fitting Instructions**

SETTINGS FOR OPTIMA DUAL FLUSH VALVE

SYSTEM	FULL FLUSH	SHORT FLUSH
OPTIMA	2	14
CONSERVE	2	14
TRIPLE	2	14
FLUSH	2	14

Twyford