

# VALVESETTING & SERVICING

INLETVALVE & FLUSHVALVE

 flushwise

**IMPORTANT** Before starting work please...

- **Read these instructions carefully**
- Please note the inlet valve will operate at 0.1 to 10 bar pressure. It is recommended a minimum of **0.25 bar** pressure to fill the cistern in 2 minutes.
- **Remove all protection from pottery** and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- **Check all parts against the parts list**
- **Prepare a firm working surface** (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to **prevent scratching the glazed faces** of the cistern.

## WARNING


**Alterations to these cistern fittings may infringe  
Water regulations & will invalidate our guarantee**

**TO THE INSTALLER**  
Please leave this instruction  
for the consumer

**Twyford**  
bathrooms

REF. 50130

# FLUSHVALVE: SERVICING

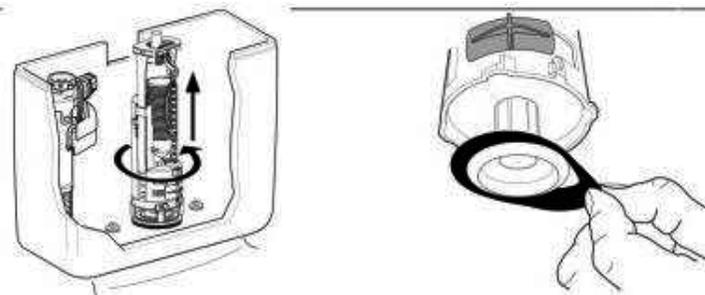

## **N.B. Turn off water supply before servicing**

Twist valve at base to remove from cistern connection.  
Remove the sealing washer and replace with new washer.

## CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with a soft damp cloth.  
DO NOT use scouring powder or abrasive cloths or scourers.

**Due to continuing product development we reserve the right to update and amend  
technical details without prior notice**

## CONSUMER GUARANTEE

We are proud of our products and guarantee them against faulty material or manufacture, provided they have been installed, cared for and used in accordance with our instructions.

**Please contact us for more information on 01270 410026**

This guarantee applies to products installed in the United Kingdom and the Republic of Ireland only and does not affect your statutory rights.

### TWYFORD BATHROOMS

LAWTON ROAD

t: +44 (0)1270 879777

ALSAGER

t: +44 (0)1270 873864

STOKE-ON-TRENT

web: [www.twyfordbathrooms.com](http://www.twyfordbathrooms.com)


### SANITEC GROUP

ST7 2DF

UK

# INLET VALVE

## SETTING THE WATER LEVEL:

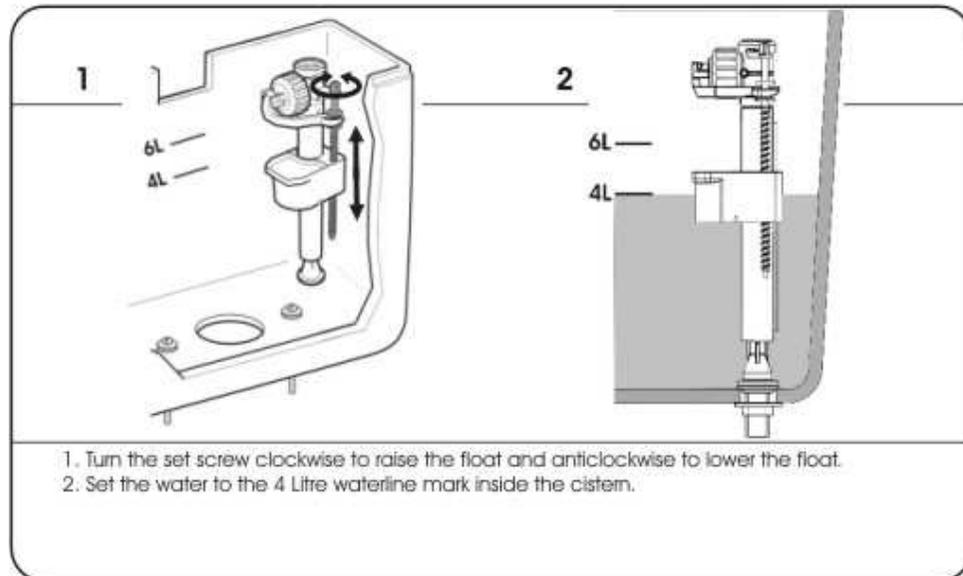

## SERVICING...

### THE DIAPHRAGM

**N.B. Turn off water supply before servicing**

