


SIAMP


Monaco

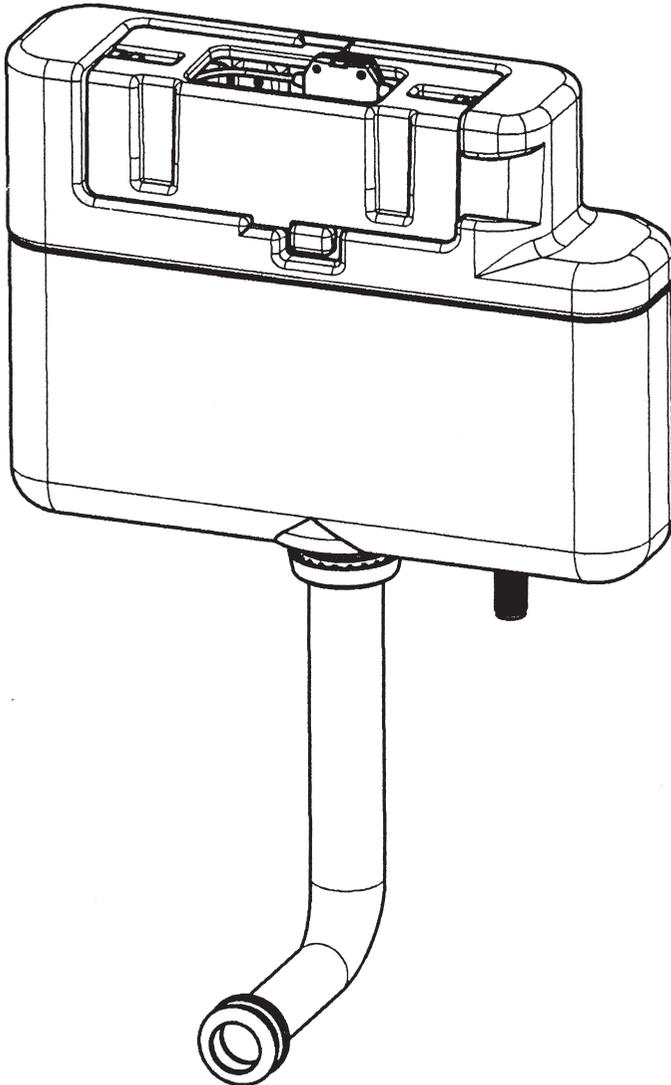

CISTERN FOR FURNITURE AND BACK TO WALL
INTRA

ASSEMBLY INSTRUCTION

DESCRIPTION

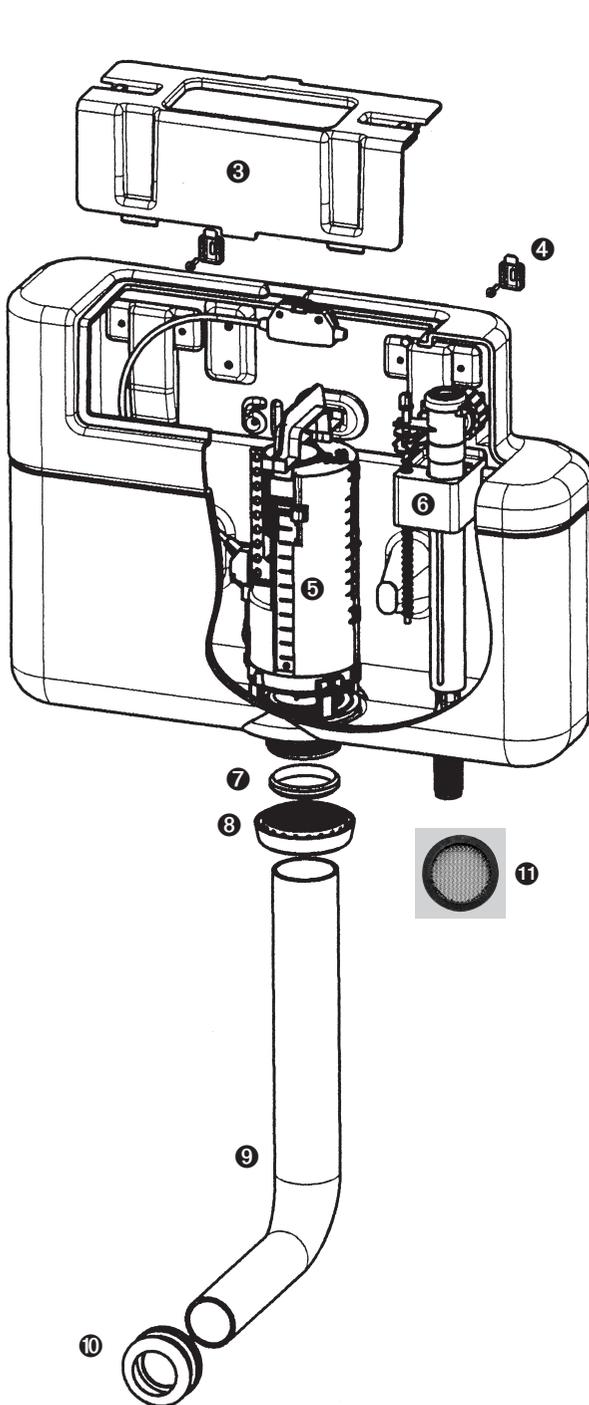

I - PARTS LIST

- ❶ Button
- ❷ Button nut
- ❸ Closing plate
- ❹ Attachment lug (X2)
- ❺ Outlet valve
- ❻ Inlet valve
- ❼ Supply sleeve seal
- ❽ Supply sleeve nut
- ❾ Supply sleeve
- ❿ Bowl seal
- ⓫ Washer/filter

Tools required (not supplied):

- Slotted screwdriver and adjustable spanner.

Advice:

• **Before you Start**

- Read these instructions carefully.
- Check the pack and make sure you have all the parts on the pack list.
- Remove all packaging from pottery and check for surface damage or defects.
- Prepare a firm working surface (e.g; floor or bench) for cistern assembly, covering work surface with cloth to prevent scratching the glazed faces of the cistern.


• **Care & Use**

- Wipe clean with a soft damp cloth around the WC suite.
- Never use scourers or abrasives.


• **Water connection**

- Water connection should be made only with an approved tap connector (not supplied). Preparatory sealing compounds should not be used.


II - ATTACHING THE CISTERN

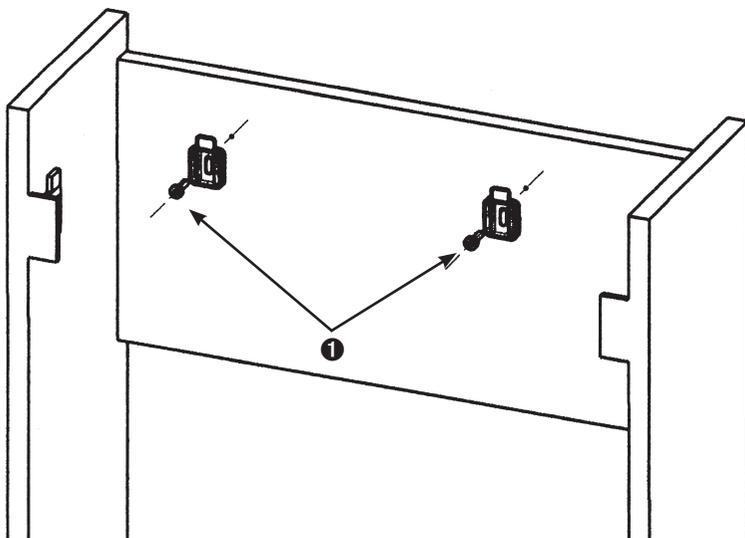


- 1 Attach the cistern attachment lugs
- 2 Position the cistern

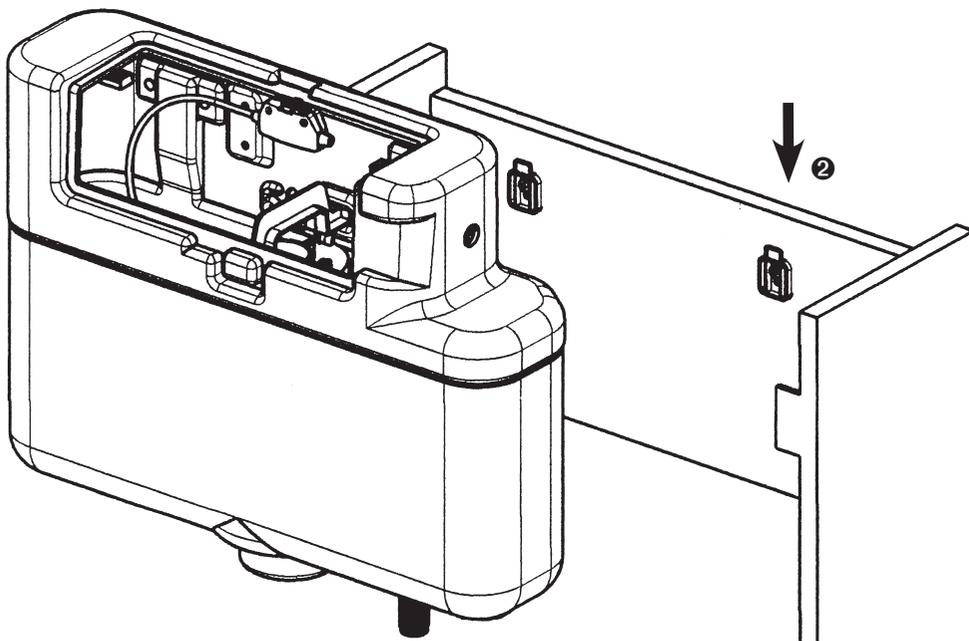

III - CONNECTING SUPPLY AND DRAIN SLEEVES

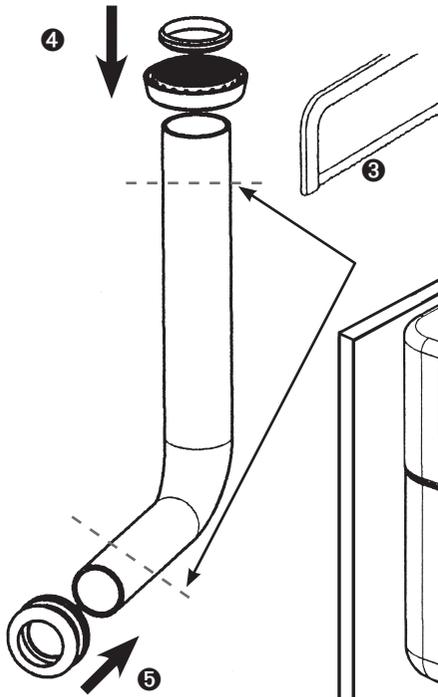

- ③ Adjust the supply sleeve to the position of the toilet bowl (height and length)
- ④ Fit the supply sleeve nut and the seal
- ⑤ Position the toilet bowl seal
- ⑥ Insert the supply sleeve in the cistern
- ⑦ Tighten the supply sleeve nut
- ⑧ Connect the supply sleeve and the drain sleeve (not supplied), reinstall the front of the cabinet and position the toilet bowl.

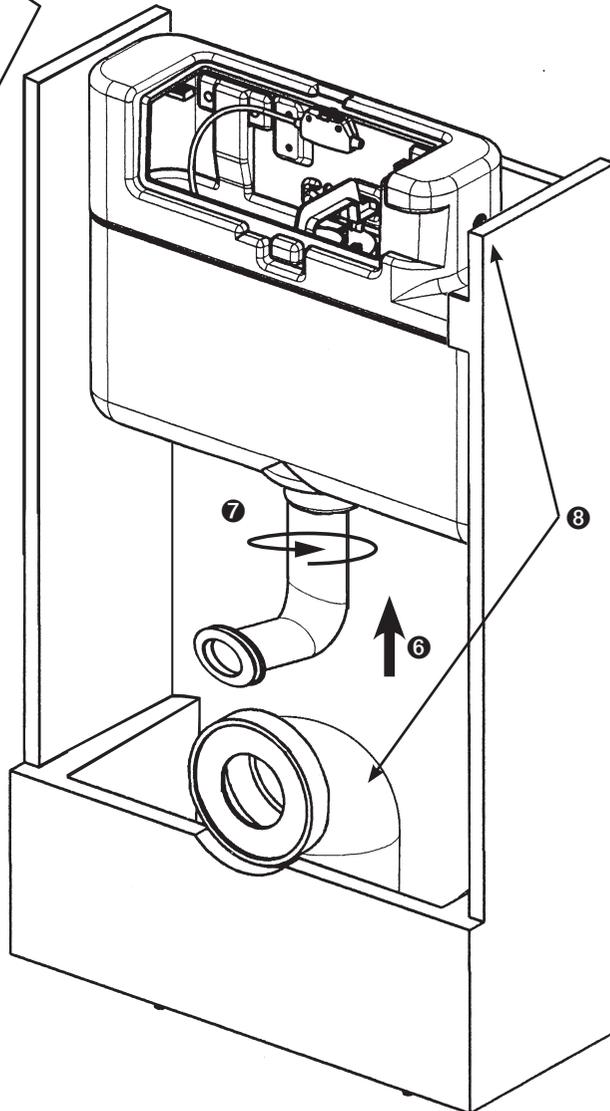


IV - CONNECTING THE INLET VALVE

① Connect the inlet valve


WARNINGS:

- 1 - Do not overtighten plastic nuts/threads.
- 2 - Do not use any sealing paste and/or compound
- 3 - The connection to the inlet valve must be made with a fitting that incorporates the washer/filter supplied. Do not connect using a fitting that locates inside the bore of the valve, a flat faced connector must be used.


SIAMP will be not responsible in case these warnings are not respected.

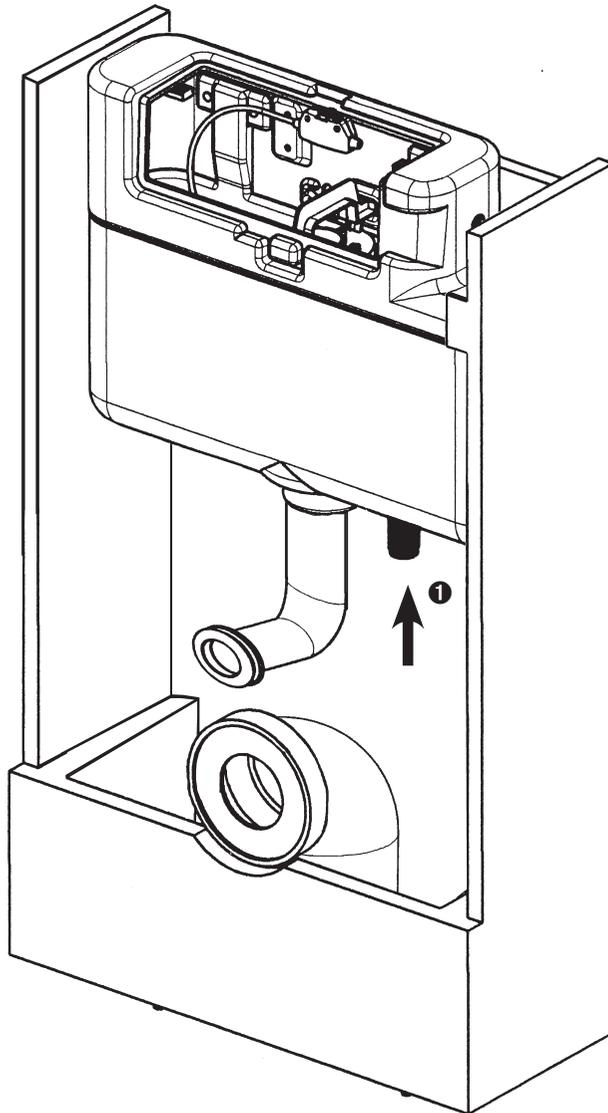

V - FLUSH BUTTON INSTALLATION

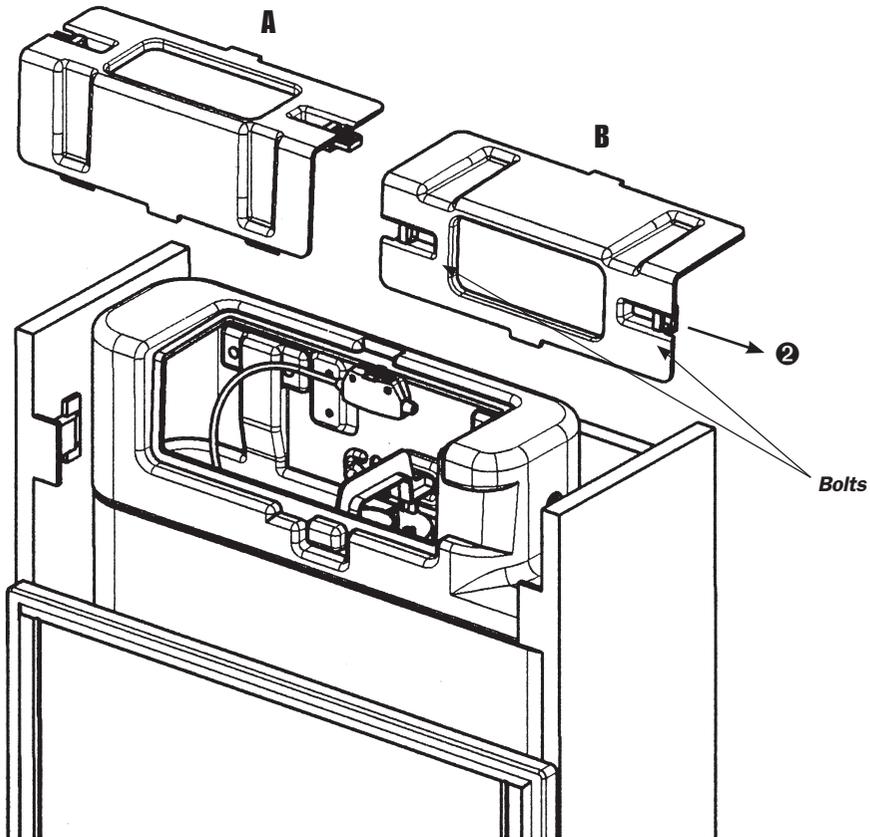

- ❶ Position the closing plate according to the type of control (top control (A) or front control (B))
- ❷ Attach the plate with the bolts
- ❸ Position the button:
 - place button on panel and screw button nut
 - clip cable case
 - Place panel back on top or front of furniture
- ❹ Close the furniture or panel

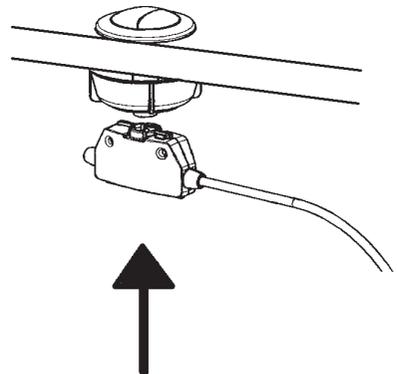

You have just installed a concealed cistern for furniture and back to wall **INTRA** by SIAMP and we would like to thank you for your confidence in our products.

As expert in technical equipment and accessories for the toilet, SIAMP has taken every possible measure to apply all the necessary care to the design and production of this product, offering a ten-year guarantee excluding rubber parts and labor.

For further information, please contact your vendor, or:

CUSTOMER SERVICE
ON
0161 703 3360 (UK only)

SIAMP

Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex

Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04

E-mail: contact@siamp.com

Site Internet : [http://: www.siamp.com](http://www.siamp.com)