



95L
3/8" Brass





95L
1/2" Brass




INLET VALVE 95L ASSEMBLY INSTRUCTIONS


1. Component list

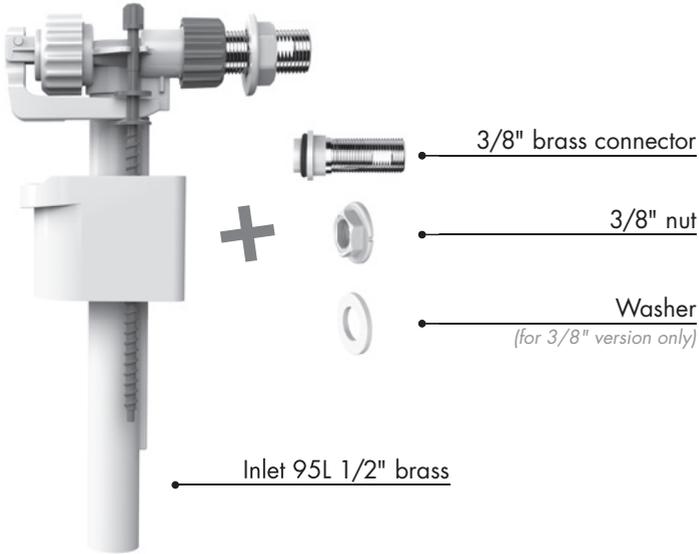



2. To switch for 3/8" version

The inlet is delivered in 1/2" brass. To switch for 3/8" version, please follow the below steps.

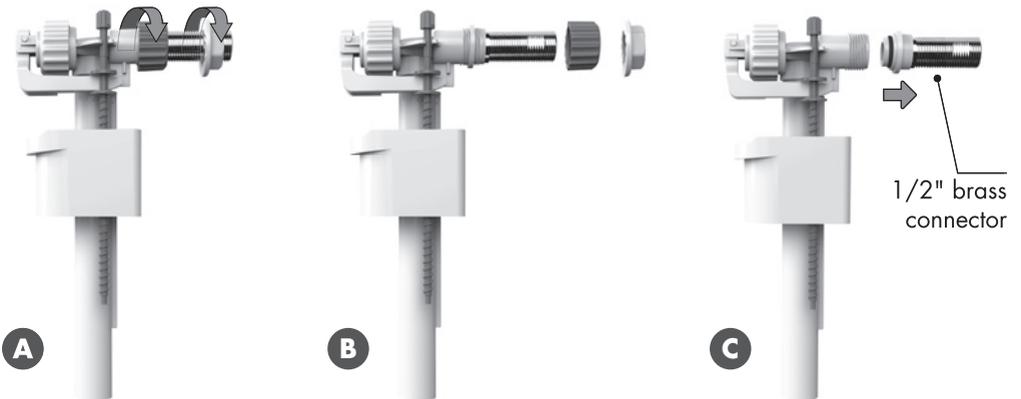


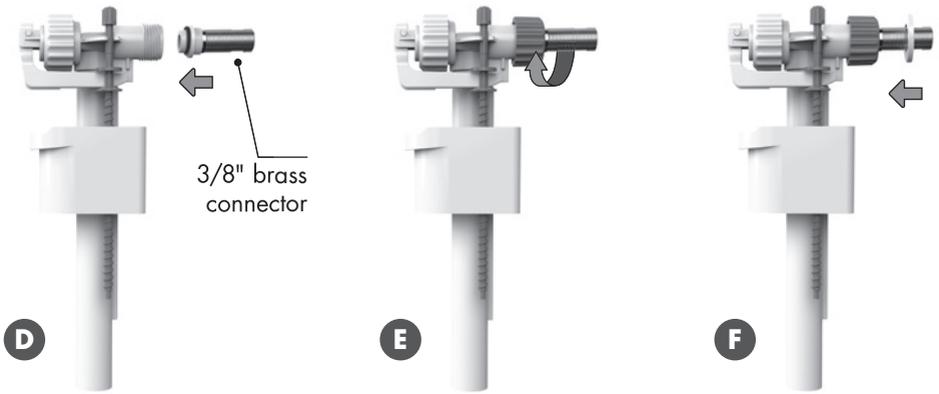


3. Inlet installation (3/8" or 1/2" brass)

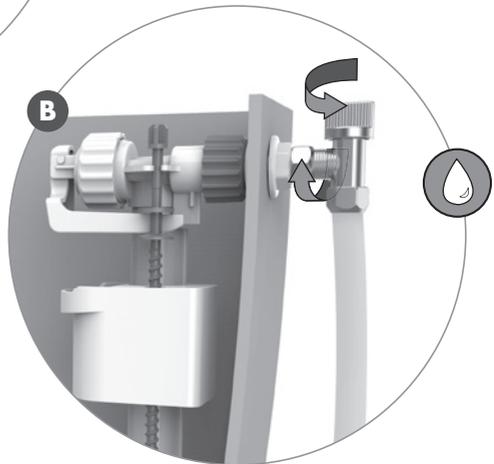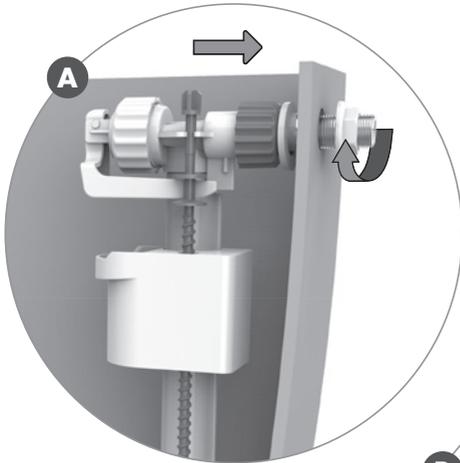

4. Water level adjustment

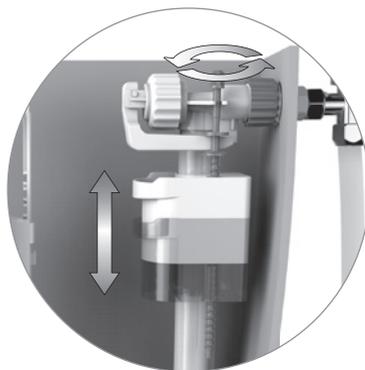

Adjust water level with the grey adjustable screw; screw to increase water level, unscrew to decrease it.

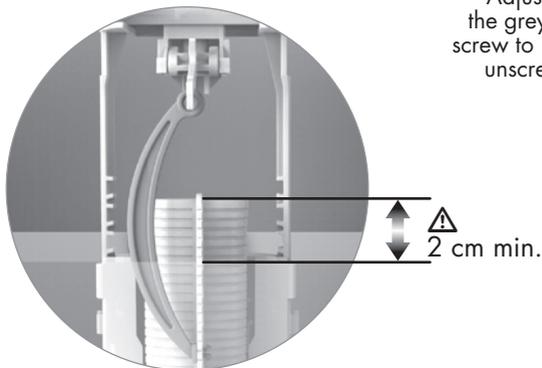

5. Maintenance



WARNINGS:

- An approved single check valve or some other no less effective backflow prevention device shall be fitted at the point of connection(s) between the supply and the fitting.
- Do not over tight in any case.
- Do not use any sealing paste and/or compound in any case

NABIS will be not responsible in case these warnings are not respected.

Ref. : 50 7617 00A

nabis
fits perfectly

Wolseley UK Ltd, Harrison Way, Leamington Spa,
Warwickshire CV31 3HH. UK
Technical helpline: 0161 681 2120
www.wolseley.co.uk