






990D
Standard and low pressure
1/2" Plastic





1. Pressure < 1 B



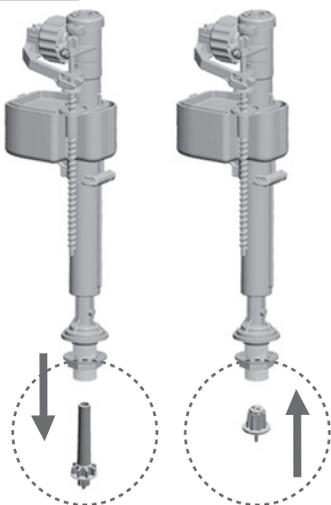


2. Inlet installation

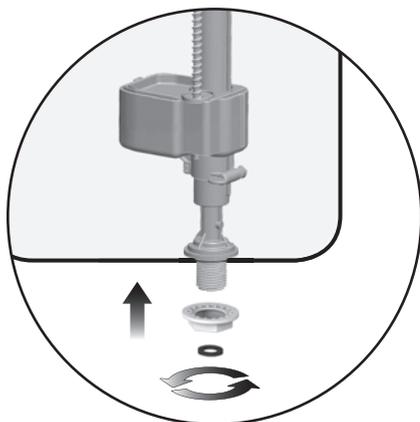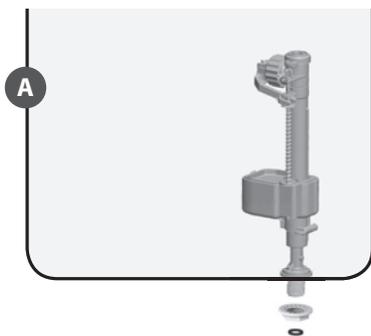


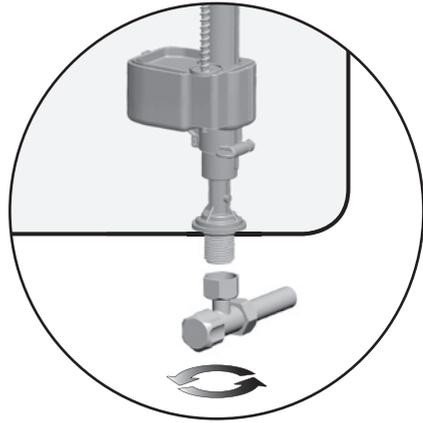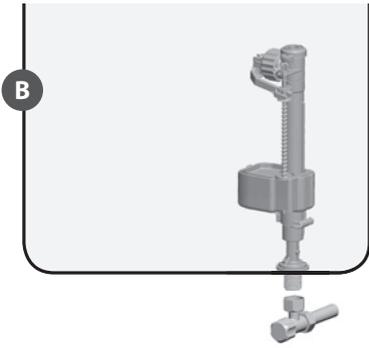


3. Water level adjustment

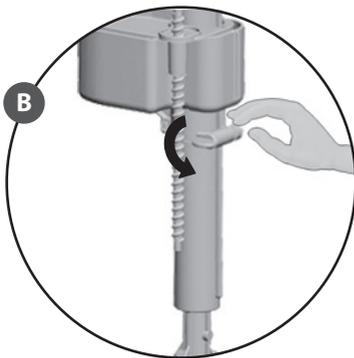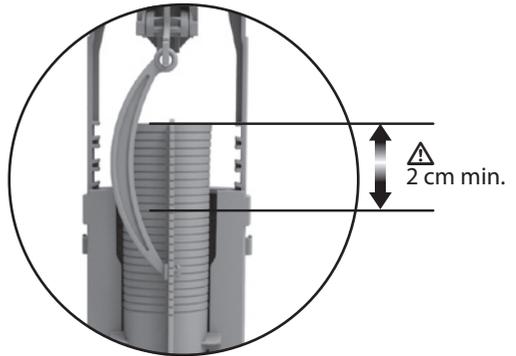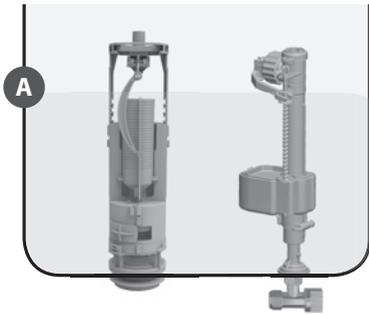

Turn the small white screw to release the float box

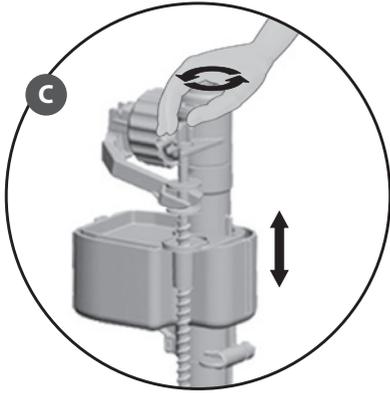


Adjust water level with the grey adjustable screw ; screw to increase water level, unscrew to decrease it.

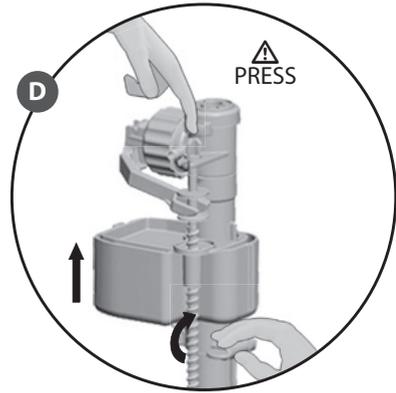

Adjust the float box to the float level and turn the small white screw to close the box, while pressing on the grey screw.

4. Maintenance

34 9513 07

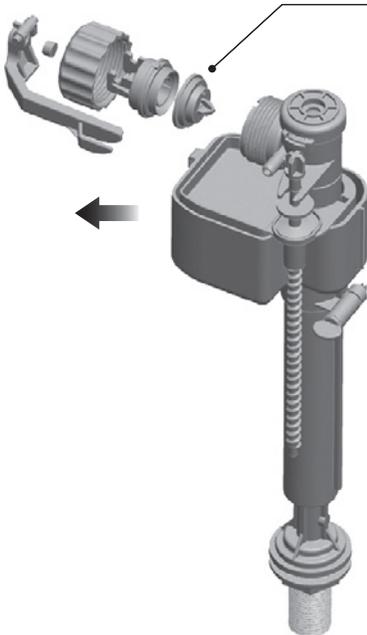

WARNINGS:

- 1) Do not over tight in any case.
- 2) Do not use any sealing paste and/or compound in any case

SIAMP will be not responsible in case these warnings are not respected.

Ref.: 50 7192 01

SIAMP

Monaco

4, quai Antoine 1er - BP 219 - MC 98007 MONACO Cedex
 Tél : +377 93 15 53 75 / Fax : +377 92 05 71 04
 contact@siamp.com / www.siamp.com