


# SIAMP

**Compact 100**  
AS/NZS 3500.1


**Compact 100 OD**  
(Delayed action)

Universel inlet valve  
for low entry cisterns,  
from 284 mm height.

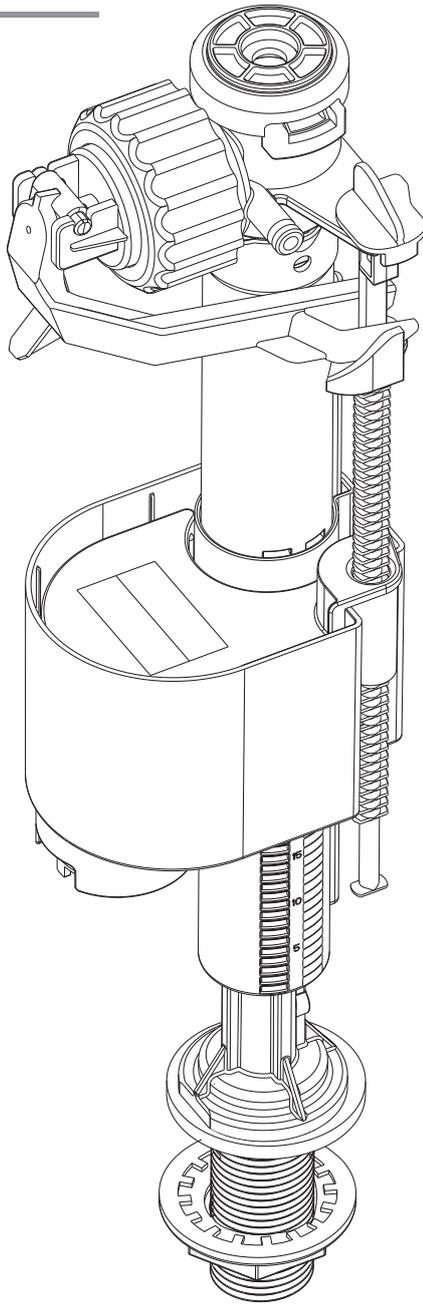


**A**

Settings

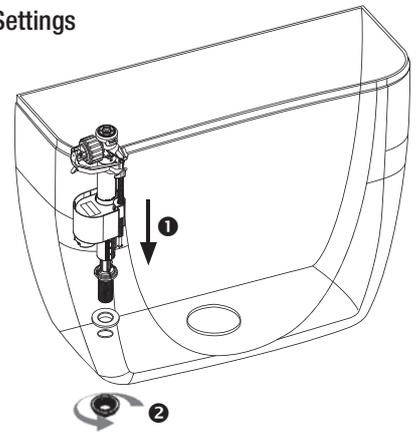


**B1**

Level water  
adjustment

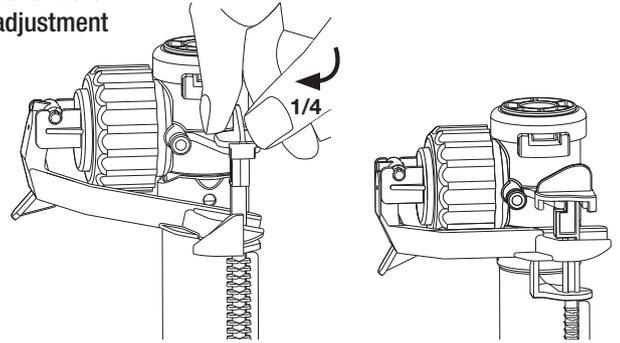


**B2**

Level water  
adjustment

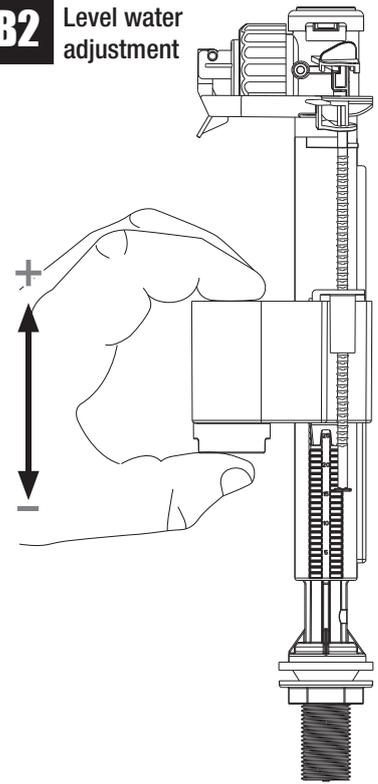


**B3**


Level water  
adjustment

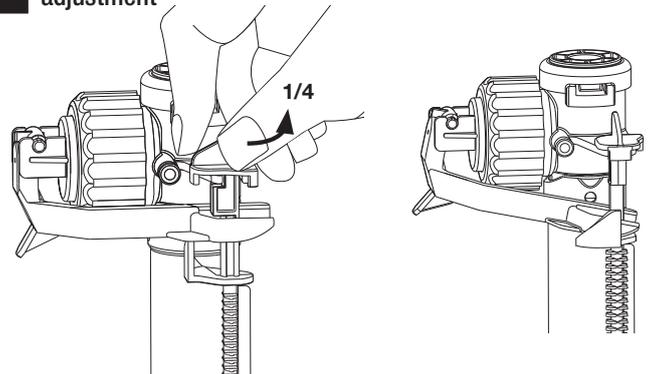


$1 \text{ bar} \leq P \leq 12 \text{ bars}$

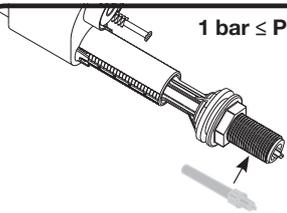





$P < 1 \text{ bar}$

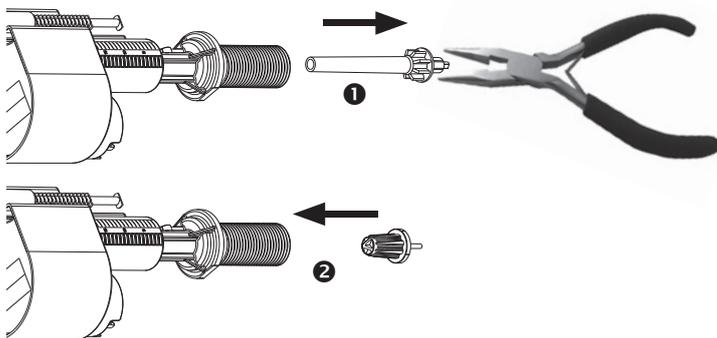


## MAINTENANCE 1

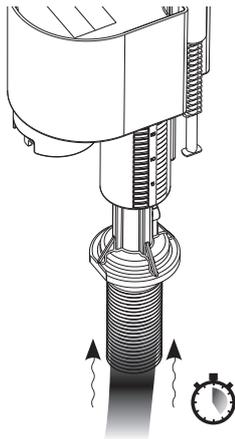


In case the tank does not refill quickly, you need to rinse the filter or reducer

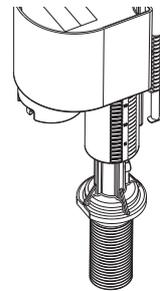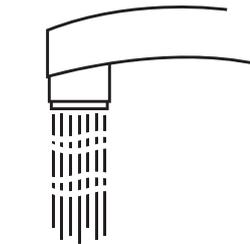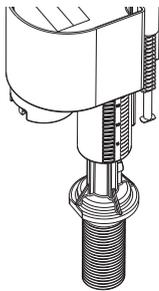


## MAINTENANCE 2/A

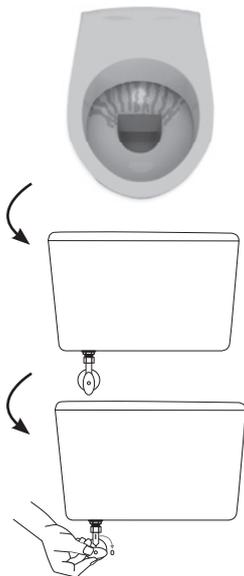


## MAINTENANCE 2/B

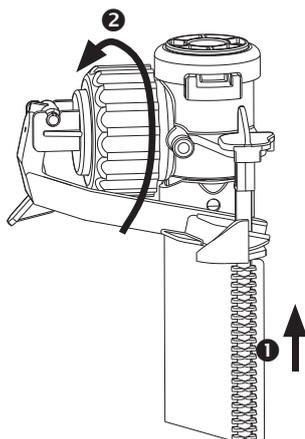

## MAINTENANCE 2/C

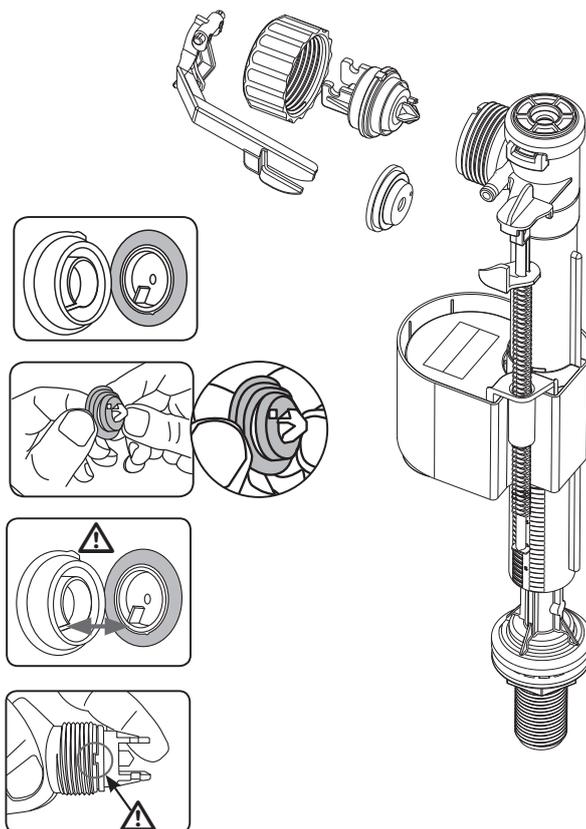

## MAINTENANCE 2/D

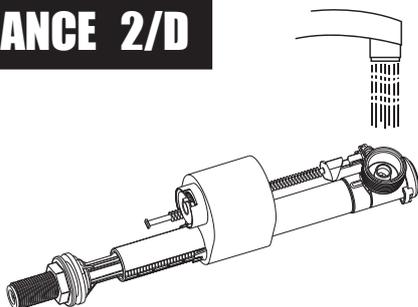

## INFORMATION

Close water supply before in case of inlet replacement or servicing.

Do not over tight in any case.

Do not use any sealing paste and/or compound in any case.

High toxicity or abrasive cleaners are not to be used into the tank.

Operating pressure :

Low pressure version : from 0.1 to 5 bars

High pressure version : from 0.5 to 16 bars

Check water tightness before opening water supply.

# SIAMP

Siamp Ltd, Unit C2, Meadowbank Business Park, Tweedale Way

Hollinwood, Oldham, Grater Manchester, OL9 8EH

Tel : 0161 681 2120 - Fax : 0161 681 2130

Email : [info@siamp.co.uk](mailto:info@siamp.co.uk)

Technical support : [aftersales@siamp.co.uk](mailto:aftersales@siamp.co.uk) - W : [www.siamp.co.uk](http://www.siamp.co.uk)