



Wall Mounted Version BCM 535

BCM 535




DESCRIPTIF

- For installing wall hung normal length or compact pan
- Wall mounting frame bearing a 400kg load
- Steel tubes structure, 30x30x1,5mm
- Feet are made from one bichromated steel plate (80x30x4mm) and one electro-welded bichromated steel tubes (25x25x4mm), fixed to the floor by 2 plugs and 2 bichromated screw plugs
- Pan wall fixing thanks to 2 brackets held by 4 plugs and 4 bichromated screw plugs
- Top fixing to the wall using 2 fixing brackets, held in place by 2 plugs and 2 bichromated screw plugs
- 7,5l cistern, from which components can be withdrawn through command plate window. Cistern insulation is optional
- Adjustable double flush outlet valve, factory preset
- Adjustable inlet valve can be hydraulic or mechanic upon choice, factory preset
- Mechanical double (3/6l) or simple (6l) flush front commands.
- Network water connection can be made on the inside with 3/8th" M stop cock or on the outside of the cistern using 1/2" M connection
- Drainage accessories can be straight or 90° bent. Made from PVC or HDPE. Available sections are 90mm., 100mm. and 110mm. Bent pipe is fixed on the frame by simply clipping it
- Pan connection set:
 - Drain straight pipe for connecting pan to bent pipe can be made from PVC or HDPE. Diameter is 100mm
 - Supply straight pipe for connecting cistern to pan
 - Pan fixing accessories
- Cladding reservation and protection accessories are optional



- 1 = 142~245 mm
- 2 = 16 ~ 100 mm
- 4 = 0 ~ 100 mm
- if 3 = 400 => 4 = 100 mm max*
- if 3 = 480 => 4 = 20 mm max*

*Taking into consideration that distance in between pan fixation axis and seating surface is 75 mm

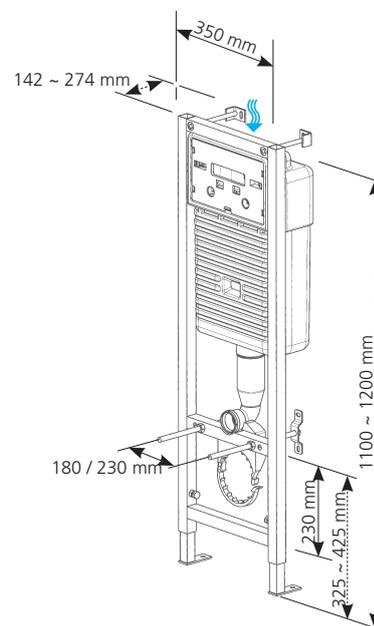

BCM 535	Packing	Packing			Palette quantity
		Nb	M3	Kg	
	Carton	1	0,07	15,82	24




Wall Mounted Version BCM 535

BCM 535



500 double flush white

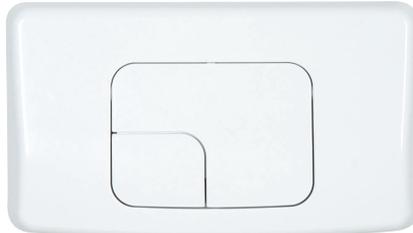

New Wave double flush white



500 single flush white



500 single flush bright chrome plated




500 double flush bright chrome plated



New Wave double flush bright chrome plated




500 single flush vandal resistant stainless steel

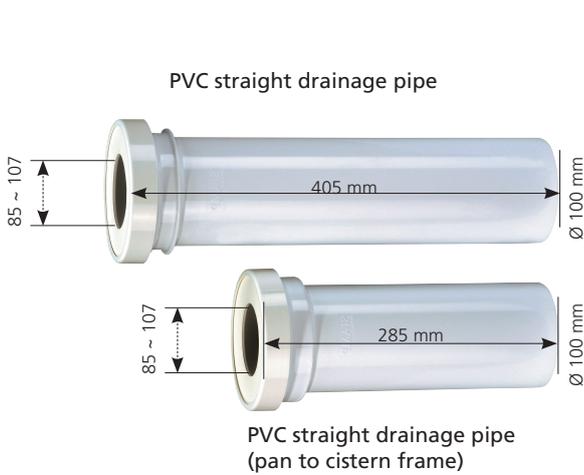


PVC bent drainage pipe




PVC bent flexible pipe



HDPE Ø 90 mm bent drainage pipe



HDPE Ø 100 mm bent drainage pipe



HDPE Ø 110 mm bent drainage pipe

