

# FIXING INSTRUCTIONS

50/99B JACUZZI

## IMPORTANT

Before starting work please...

- Read carefully these instructions.
- Remove all protection from pottery and check for surface damage or defects as no responsibility can be accepted for obvious defects after installation.
- Check all parts against the parts list.
- Prepare a firm working surface (e.g. floor or bench) for cistern assembly, covering work surface with a cloth to prevent scratching the glazed faces of the cistern.



## WARNING


Alterations to these cistern fittings may infringe water regulations and will invalidate our Guarantee

WRAS Approved Inlet Valve COMPACT 99B

WRAS Approved Outlet Flush Valve OPTIMA 50


WC Suite UK Water Supply compliant

## PARTS LIST

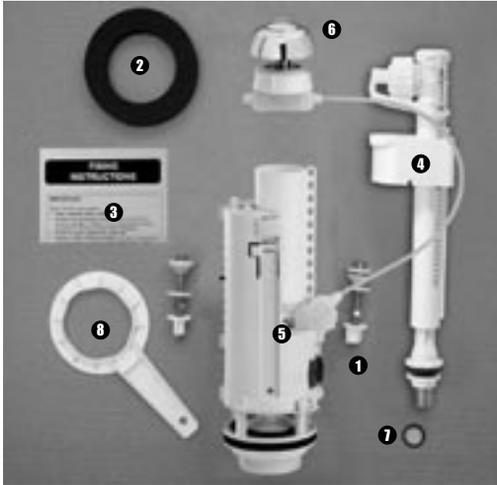

- ❶ 2 x Cistern fixings
- ❷ 1 x Sealing gasket
- ❸ 1 x Fixing instructions
- ❹ 1 x Inlet valve
- ❺ 1 x Outlet valve
- ❻ 1 x Button
- ❼ 1 x Filter (inlet)
- ❽ 1 x Spanner

## ASSEMBLING THE CISTERN



- ❶ Assemble fixing bolts to cistern as shown




- ❷ Assemble outlet valve with washer on the inside of cistern and secure with locking nut




- ❸ Assemble inlet valve with washer on the inside of cistern and secure with backnut, check float moves freely



**4** Place gasket onto outlet valve




**5** Secure cistern to WC with locking nuts




**6** Connect water supply to inlet valve


N.B. : Make connecting tightness with filter seal other than any corrosive joint compound. Do not use connector handling the internal part of the inlet valve.



**7** Adjust inlet valve float with screw 'A' to set water line



6L waterline mark

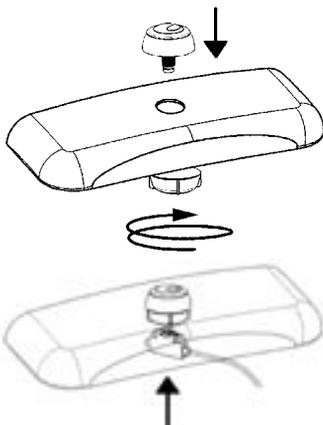


**8** Assemble push button as shown

- Once the set-up has been completed, place button on lid and screw button nut, (if the hole in the lid is > 38 mm and < 45 mm, remove the escutcheon)
- Clip cable case
- Place lid back on top of cistern

## SERVICING THE VALVE



Remove valve from cistern as shown



Replace the washer

## CARE INSTRUCTIONS

Wipe around the pan, cistern, seat & cover with soft damp cloth. DO NOT use scouring powder or abrasive cloths or scourers.

Due to continuing product development we reserve the right to update and amend technical details without prior notice.

## JACUZZI UK

Bathrooms Product Division

For after sales issues or technical assistance or information, please contact us at:

---

**PO Box 155 - ROYSDALE WAY - EUROWAY - BRADFORD  
WEST YORKSHIRE - BD4 6ST**

---

**RECEPTION TEL: 01274 654 700 - CUSTOMER SERVICE FAX: 01274 654 771**

---

**kiwa**  
approved  
product



UK WATER SUPPLY  
REGULATIONS